

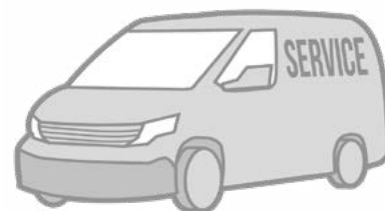


# MAROLO



20 | BIKE WORKSHOP  
21 | CATALOGUE



[www.marolotest.com](http://www.marolotest.com)



# ONLINE STORE

**MAROLO** SOCIÉTÉ ACTUALITÉS SERVICES DÉSTOCKAGE VIDÉOS CONTACT

Identifiez-vous  
Créez un compte  
Recherchez sur le site



SPECIALISTE DES EQUIPEMENTS D'ATELIERS

MAROLO  
MOTO

MAROLO  
GREEN

MAROLO  
MARINE

MAROLO  
INDUSTRIE

MAROLO  
CATALOGUE

MAROLTEST

Plus d'infos sur le contact : 01 20 29 29 29 - 01 20 29 29 29 - 01 20 29 29 29

Coordonnées

Je suis\*  
Particulier

Nom\* Prénom\*

Adresse\*

Place orders 24/7

Compare product specifications and customization options

Check your order history from your personal account

Get access to video content and all of our current catalogues

Visit us at :

**WWW.MAROLOTEST.COM**



Table MAROLOLIFT 1200 PL Pneumatique

Table en tôle lisse avec rebords, une trappe arrière encastrable et une rampe d'accès amovible

FICHE PRODUIT CARACTÉRISTIQUES TECHNIQUES

Réf. 804040

Connectez-vous pour voir les prix

Table élévatrice Pneumatique 1200 PL

- Pont élévateur développé pour lever les véhicules lourds
- Sécurité manuelle
- Rampe d'accès en tôle lisse, amovible
- Plat en tôle lisse et rebords
- Trappe arrière (275 mm) encastrable sous le plateau
- Véhicule pneumatique, seul l'énergie pneumatique est nécessaire pour utiliser le pont élévateur
- Commande par pédalier

Délai de livraison : 2 semaines (couleur standard)

CES PRODUITS PEUVENT VOUS INTÉRESSER

MotoFixe Manuel  
Le bras de roue est  
l'accessoire indispensable à  
une table élévatrice  
En savoir plus!

MotoFixe  
Le bras de roue est  
l'accessoire indispensable à  
une table élévatrice  
En savoir plus!


Pont élévateur extra plat 1200 W MAROLO

Le pont élévateur extra plat 1200 W MAROLO est idéal pour lever les véhicules lourds. Il est équipé d'une rampe d'accès amovible et d'une trappe arrière encastrable.

MOTOFIXE AUTOMATIQUE

Le MotoFixe Automatique est un accessoire indispensable pour lever les véhicules lourds. Il est équipé d'une rampe d'accès amovible et d'une trappe arrière encastrable.

# CATALOGUES

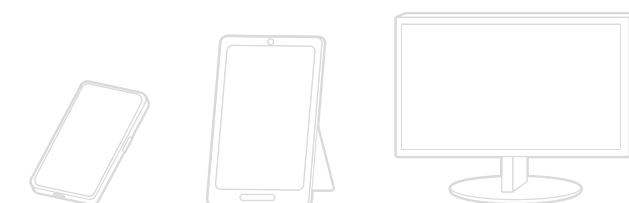

Available for download  
at **WWW.MAROLOTEST.COM**



# OUR ENTERPRISE :

Established in France in 1958, **MAROLOTEST** specializes in the development, manufacture, and distribution of workshop equipment. Our activity is focused on 3 main markets : Motorcycling, landscaping and outdoor power equipment, and marine equipment. In each of those fields, we work in strong partnership with premium brands all over the world, be it in Japan, Germany, the USA...

As the European leader in our domain, we are proud to offer our customers a broad range of products, mainly manufactured in our plant in France. Equipment stamped «**MAROLO**» is recognized and chosen by professionals for its heavy-duty design, quality of construction, ergonomics and smartness. In our world, customer satisfaction always comes first, and our teams' strategy reflects this.



Our plant in Cholet, France.

# OUR WARRANTY :

All of our products are provided with a 2-year warranty. Within this period, any spare parts needing to be replaced will be shipped out to the dealer free of charge. The replacement is to be made by the dealer according to MAROLO's specifications.

This warranty does not cover inappropriate use, alteration of the product without MAROLO approval, or failure to follow the instruction manual. For further information, please see our sales conditions at [www.MAROLOTEST.com](http://www.MAROLOTEST.com)

# OUR SKILL SET :



# CATEGORIES

- MAROLOSERVICES
- VEHICLE LIFTS AND ACCESSORIES
  - MAROLOWLIFT flat-lifts .....p.10-19
  - MAROLOLIFT motorcycle lifts .....p.18-27
  - MODULIFT modular lifts .....p.28-35
  - Custom colorways.....p.36-39
  - E-LIFT electric bike lift.....p.40-47
  - Lift accessories.....p.48-55
  - Summary .....p.56-57
- TYRE MAINTENANCE
  - Tyre-changers and accessories.....p.58-64
  - Wheel balancers and accessories .....p.64-67
- SMART WORKSHOP FURNITURE
- GENERAL WORKSHOP EQUIPMENT
  - Compressors and accessories .....p.80-82
  - Exhaust gas extraction .....p.83-85
  - Workbenches and accessories.....p.86-87
- TESTING BENCH AND ACCESSORIES
- DIAGNOSTIC TOOLS
- OIL DISTRIBUTION
- SMALL TOOLING
  - Fully equipped tool trolleys .....p.106-111
  - Miscellaneous handheld tooling .....p.112-126
- MAROLO BIO CLEANING TANKS



# OUR EXPERTISE AT YOUR SERVICE

CE Commission expertise

Product  
design

Workshop  
design

Customization

Logistics

Installation

Load tests


Maintenance

Recycling

## CE Commission experts

Our team includes **two experts** affiliated with the Standardization Bureau, division of the **European Committee for Standardization (CEN)**.



We therefore participate in the establishment of standards regarding workshop equipment, and we aim to ensure **workplace safety** for automotive professionals.

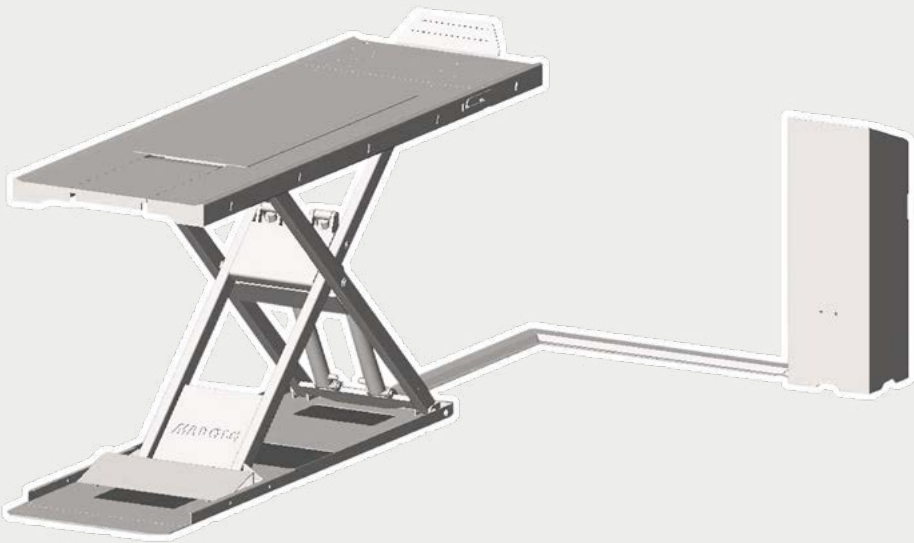

## Design and development

MAROLO products are designed and conceived in our engineering office in Cholet, France. Our understanding of the latest technologies in terms of Computer Assisted Design (CAD) allows us to come up with **innovative** solutions, best suited to your needs as a professional.


We use finite element simulation software to test our materials, to guarantee their **strength and durability** under any circumstance.

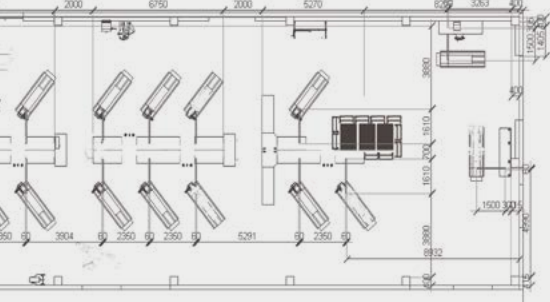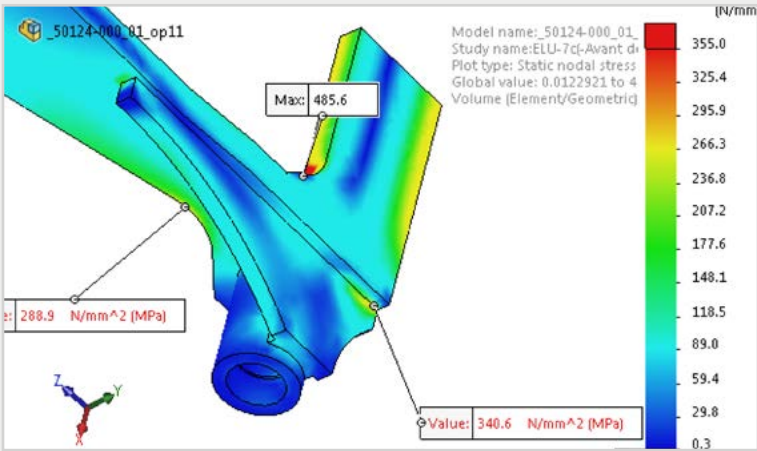

## Workshop design

We use **3D modeling** software to engineer your workshop, working around spatial constraints. We use our power supply and fluid management expertise to design a **safe and efficient workspace**, that meets all applicable standards.

We work in close partnership with outside parties involved in the development and building project, and take part in pre-construction meetings to ensure project completion under optimal conditions.

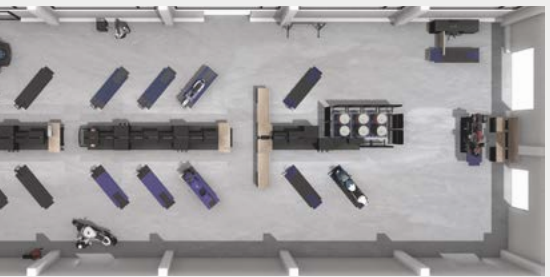

## Customization options

As an equipment designer and manufacturer, we are able to expand our offer and **customize your space and equipments** to suit your brand aesthetic.






# VEHICLE LIFTS OVERVIEW

## MAROLOLIFT

A range of extra-flat lifts, designed to assist in the maintenance of heavy and low ground clearance vehicles. The lower platform makes vehicle installation easier and greatly improves working comfort, while also saving space in the workshop.



Power supply options:

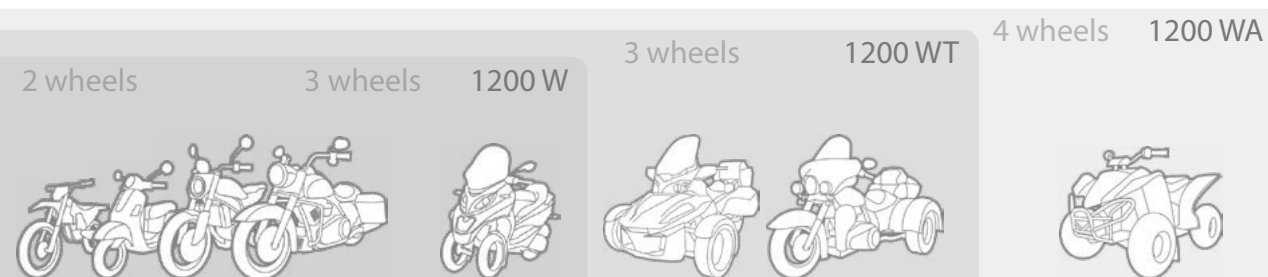

## MODULIFT

A range of versatile lifts, using the patented **MODULIFT** technology that makes them compatible with 2-, 3-, and 4- wheeled vehicles.



Power supply options:




# VEHICLE LIFTS OVERVIEW

## MAROLOLIFT

A complete range of lifts, designed to aid in the maintenance of bikes of all sizes.



Power supply options:

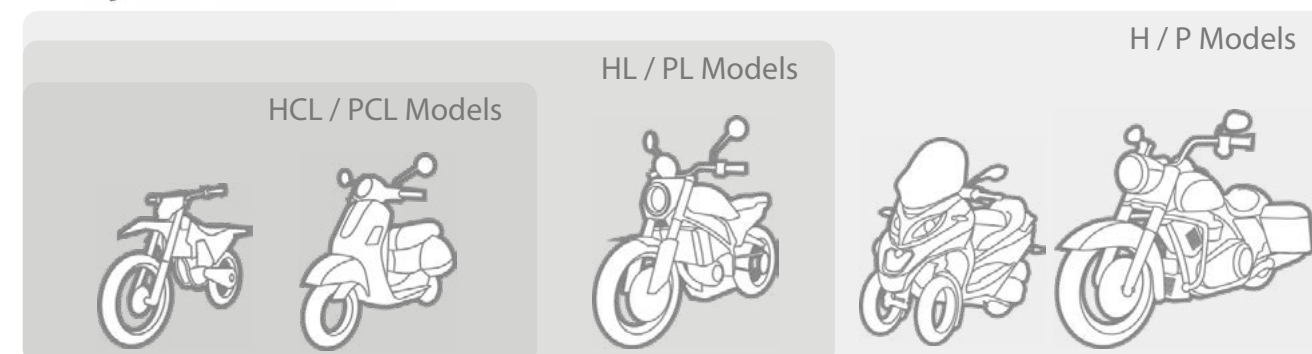


## MAROLOE-LIFT


A motorcycle lift and its complete range of accessories, designed for the maintenance of electric bikes under optimal safety conditions.



Power supply options:

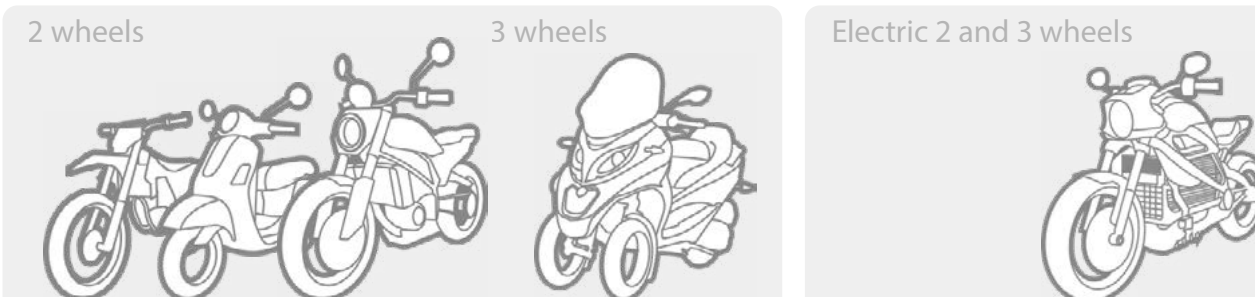


# MAROLOWLIFT

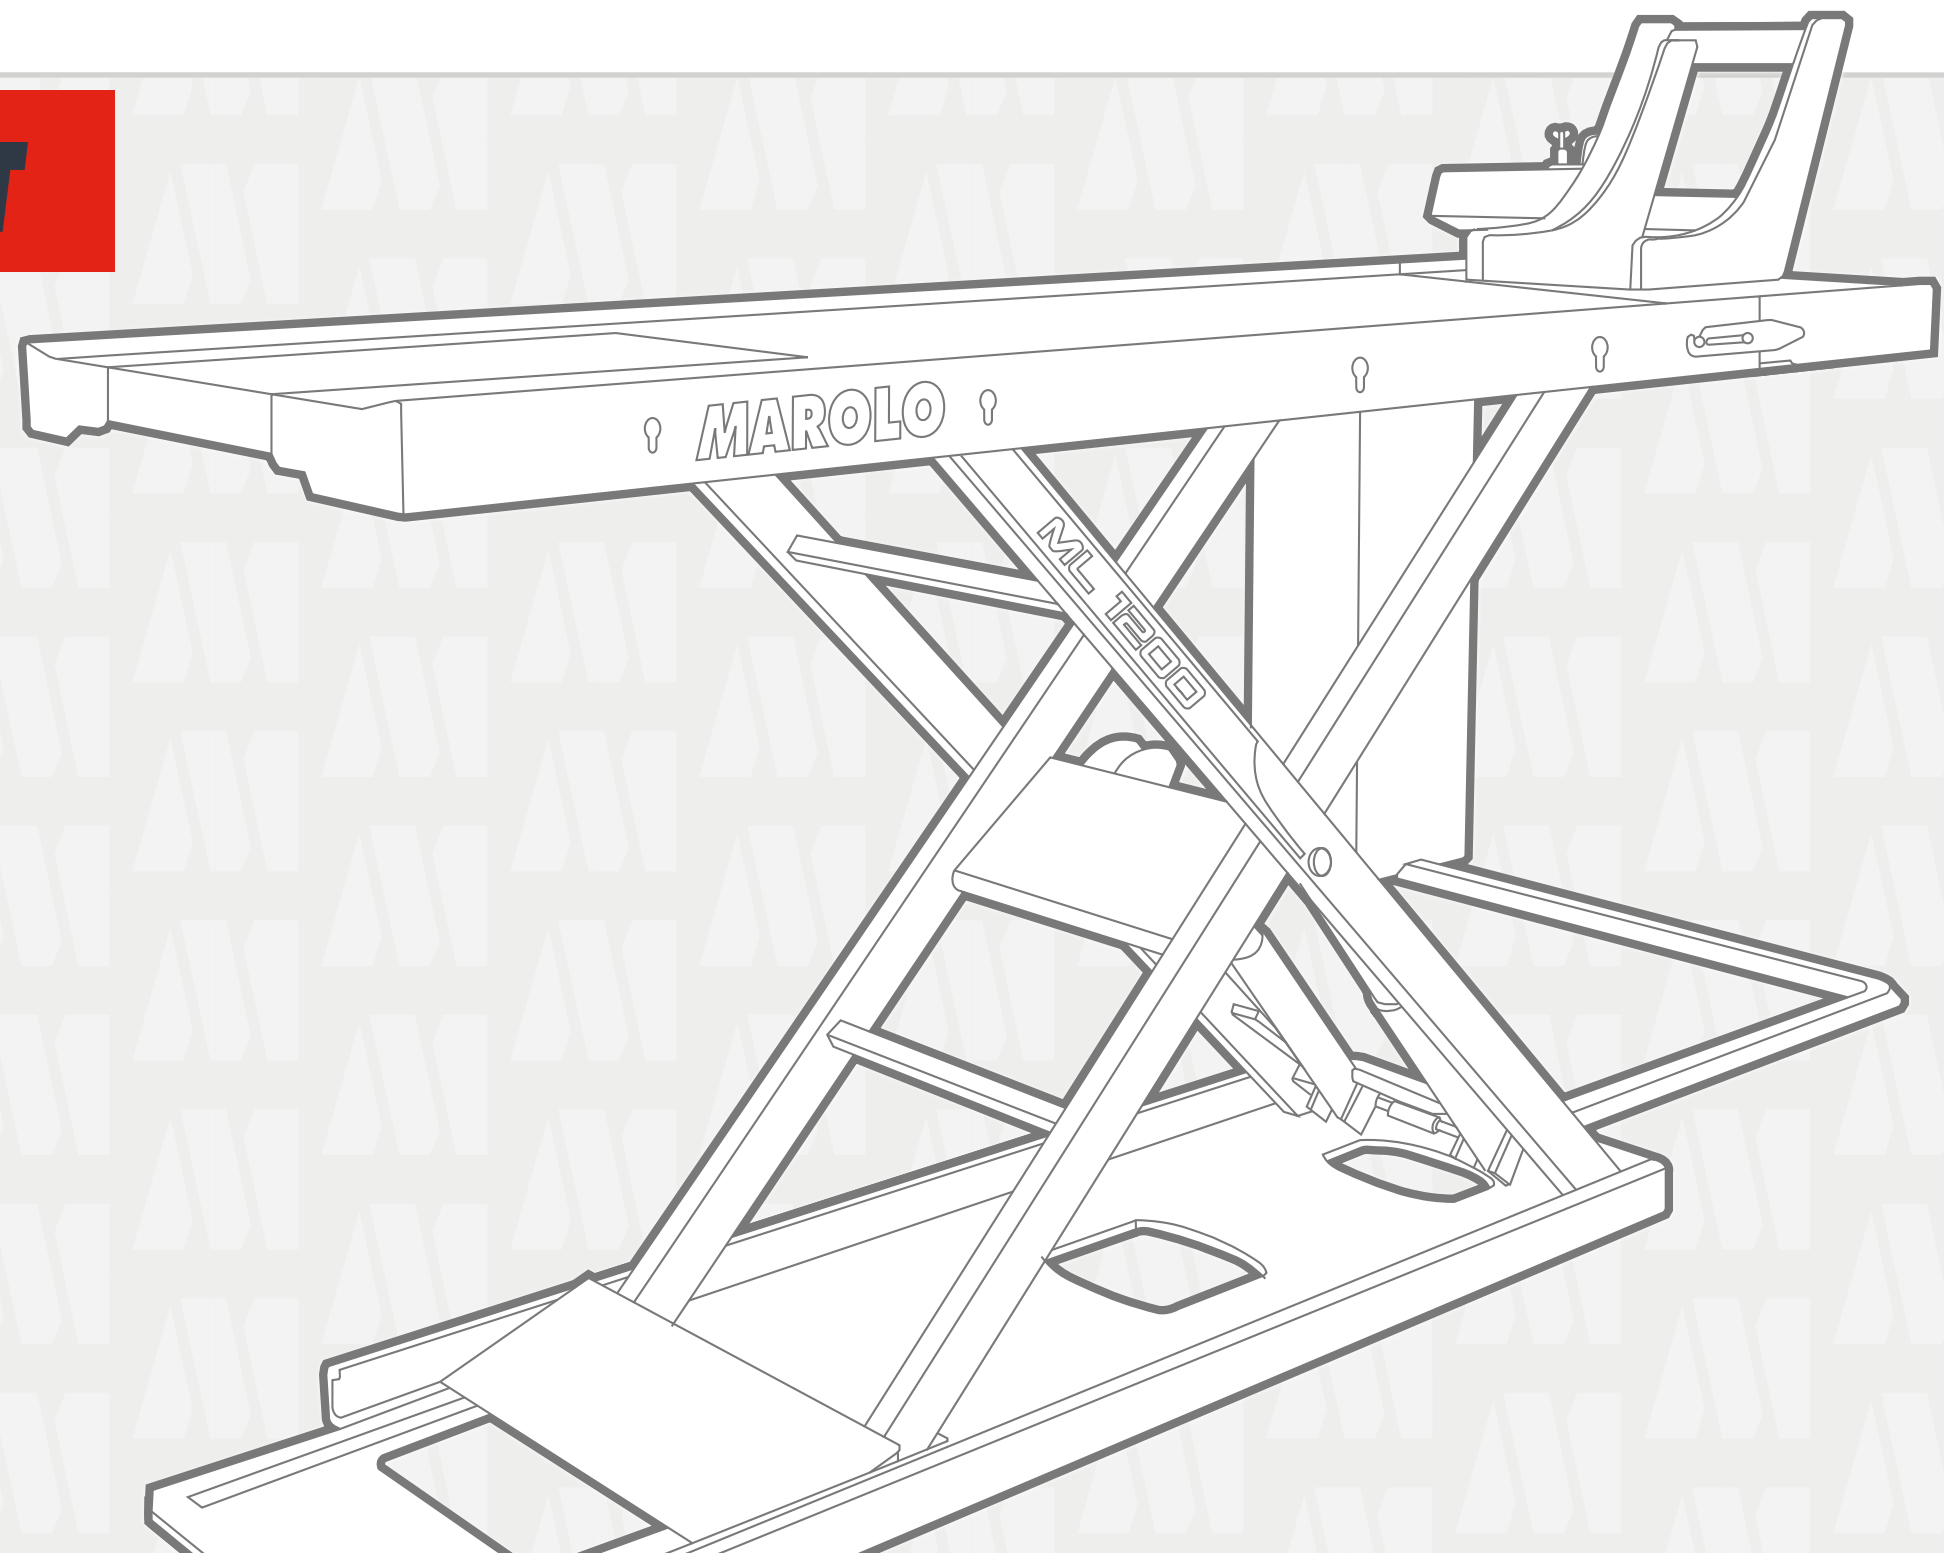

## EXTRA-FLAT LIFTS

2 wheels

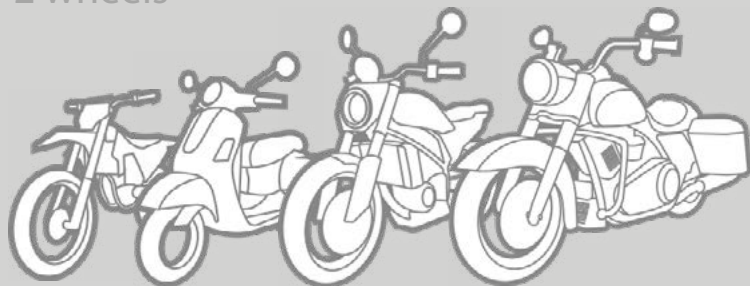


3 wheels

1200 W




3 wheels

1200 WT

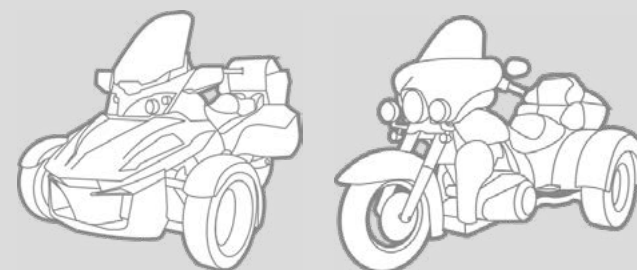

4 wheels

1200 WA





1200 W - FLAT LIFT

COMPATIBLE WITH



CAPACITY



POWER SUPPLY





Heavy duty design for professional use  
Designed for heavy / low ground clearance motorcycles  
Only 80mm tall when lowered : No need for civil engineering

- 1 Pair of hydraulic jacks, equipped with safety valves
- 2 Wide chequered access ramp, that automatically positions itself
- 3 Retractable front platform for easy access to vehicle
- 4 Rear trap door
- Reinforced platform with chequered plates
- Pneumatic outlet (to power pneumatic tooling)
- 5 Hydraulic jacks with hidden electro-hydraulic pump, concealed in the side console or integrated into furniture (1200 WI model)
- 6 2 protective cable casings included (not supplied for WE, WI, WEI models)





1200 WI MODEL

Integration of the control panel and electro-hydraulic pump into furniture

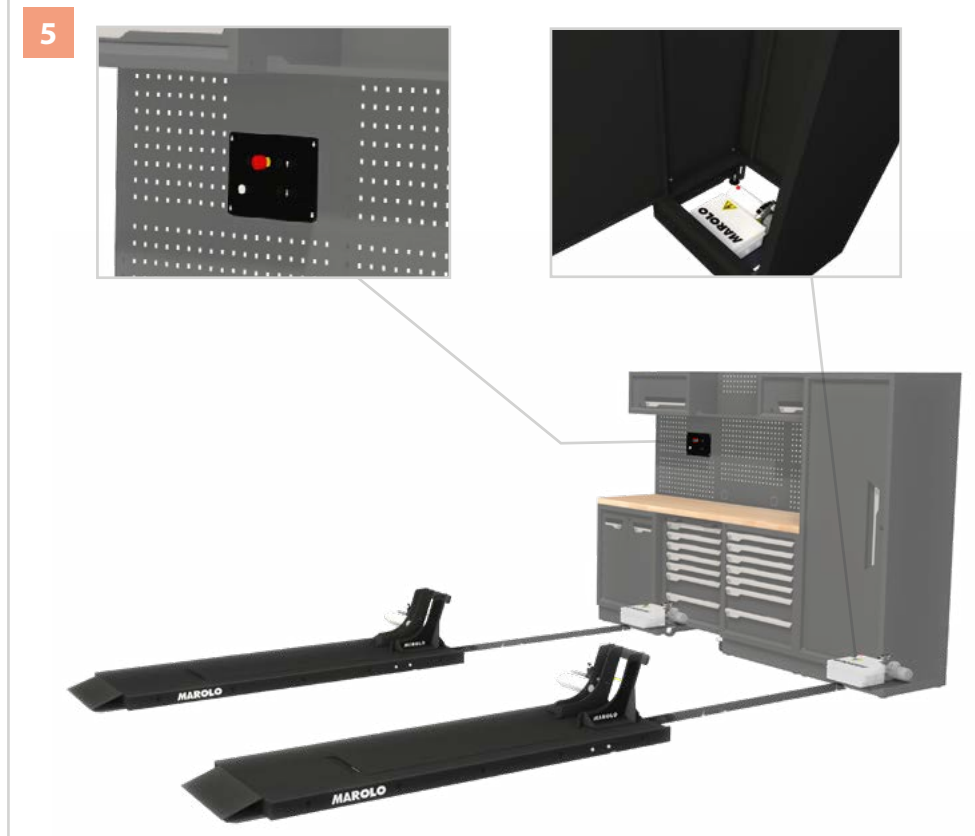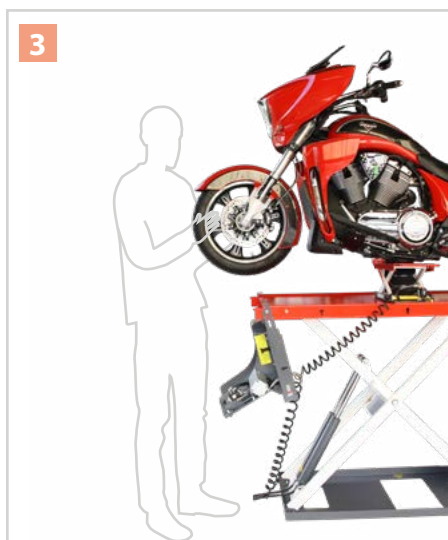

Console position can be customized. See page 16


PRODUCT SPECIFICATIONS								
MODEL	REFERENCE	MAX H	MIN H	L	W	CAPACITY	POWER SUPPLY	WEIGHT
1200 W	804400	1200 mm	80 mm	2300 mm	750 mm	600 Kg	Electric 230V 50Hz - 1.1KW 7.4A	270 kg
1200 WI	804402						+ Pneumatic 8 bar	

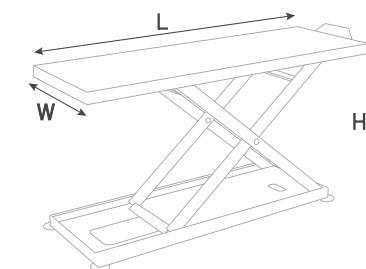

AVAILABLE OPTIONS

MOTOFIXE

AUTOMATIC MOTOFIXE  
Ref. 801590  
See page 52

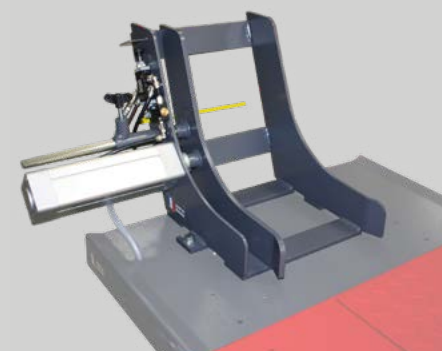

PROTECTIVE CABLE CASING

Ref. 801361  
Length : 1100 mm  
Width : 130 mm  
Height : 20 mm  
Angled cutting guide



STAINLESS STEEL PROTECTIONS

Ref. 804423  
Reversible plates, with fixings included  
Should be changed regularly



NEW



# 1200 WA - FLAT LIFT

## EXTRA-FLAT LIFTS EXTRA-FLAT LIFTS


### COMPATIBLE WITH



### CAPACITY




### POWER SUPPLY



Heavy duty design for professional use  
Designed for heavy motorcycles and/or low ground clearance vehicles, and lightweight 4-wheelers  
The lift is only 80mm tall when lowered : No need for civil engineering

- Extra-wide steel platform
  - Wide pivoting access ramp
  - Pair of hydraulic jacks equipped with safety valves
  - Hydraulic jacks with concealed electro-hydraulic pump, in the side console (1200 WA) or integrated into furniture (1200 WAI)
  - Platform can be extended using removable extensions (sold separately)
  - 2 protective cable casings included (not supplied for WAE, WAI, WAEI models)
- Pneumatic outlet optional (Ref. 801356)




Console position can be customized. See page 16


\*With controls integrated into furniture. See page 51

### PRODUCT SPECIFICATIONS

MODEL	REFERENCE	MAX H	MIN H	L	W	CAPACITY	POWER SUPPLY	WEIGHT
1200 WA	804450	1200 mm	80 mm	2300 mm	1100 mm	600 kg	Electric 230V 50Hz - 1.1KW 7.4A	300 kg
1200 WAI*	804452							
1200 WR	804460							270 kg

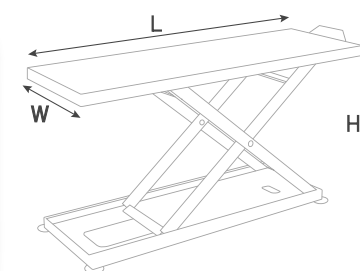

### Platform expansion

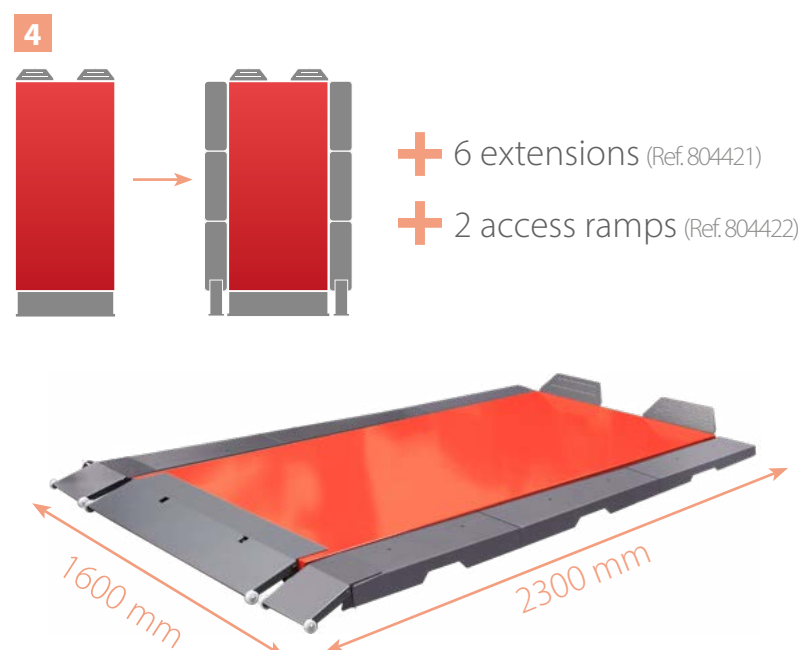

### Variant : 1200 WR

Motorbike landing platform - 1200 WR  
Ref. 804460



Front access ramp (Ref. 801362)




### AVAILABLE OPTIONS

#### EXTENSION PLATE

To widen the platform  
Steel plate measuring 765 x 250 mm  
Capacity : 100 kg

Sold by the unit  
Ref. 804421

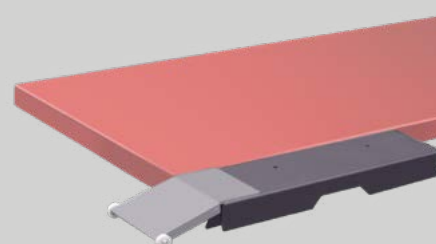

#### ACCESS RAMP

Pivoting ramp, converts into wheel stopper  
To be fixed to the extension plate (Ref. 804421)

Sold by the unit  
Ref. 804422




#### FRONT ACCESS RAMP

Fixed ramp for flat lift models  
Secured at the front of the lift

Sold by the unit  
Ref. 801362

Shown here on 1200 W model.  
Contact us to establish compatibility with your model.

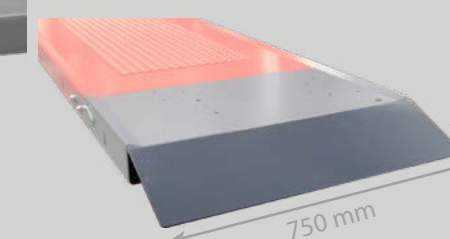



NEW

1200 WT - FLAT LIFT

EXTRA-FLAT LIFTS EXTRA-FLAT LIFTS


COMPATIBLE WITH



CAPACITY




POWER SUPPLY




Heavy-duty design for professional use  
Engineered for heavy or low-ground clearance motorcycles and 3-wheeled vehicles (Tri Glide, Spyder ...)  
The lift is only  $\approx 80$  mm tall when lowered : no civil engineering required

- Extra-wide, smooth platform with lateral 1 and frontal 2 removable extensions
- 3 Pivoting access ramps
- 4 Wide pivoting main access ramp
- 5 Dual hydraulic jacks, equipped with safety valves
- 6 2 protective cable casings (not provided for WTI model)
- 7 Hydraulic jacks with concealed electro-hydraulic pump, in the side console (1200 WT) or integrated into furniture (1200 WTI)  
Optional pneumatic outlet (Ref. 801356)

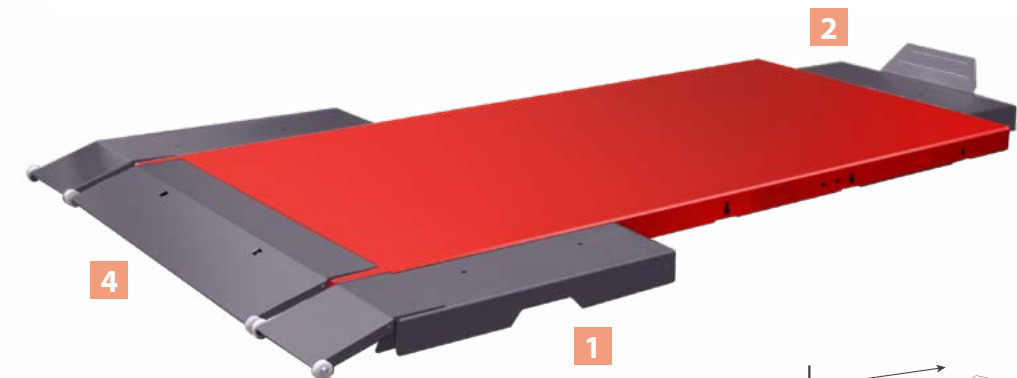


Configuration of the side console


Note :  
For the operator's safety, W / WE, WA / WAE and WT models are equipped with a side console to prevent any risk of injury when the platform is lowered.

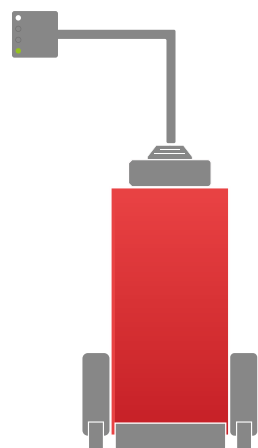

Left-hand side console

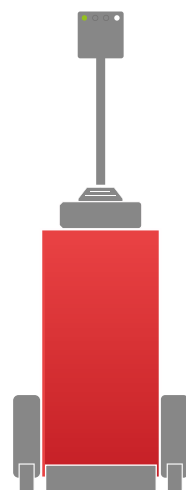


Front console

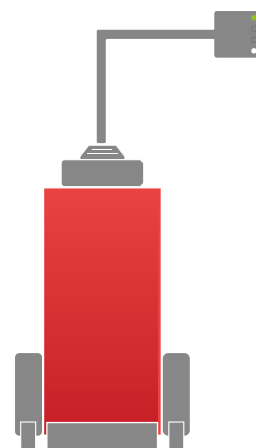

Right-hand side console

\* With controls integrated into furniture. See page 51 \*\* Including extensions


PRODUCT SPECIFICATIONS								
MODEL	REFERENCE	MAX H	MIN H	L	W	CAPACITY	POWER SUPPLY	WEIGHT
1200 WT	804455	1200 mm	80 mm	2550 mm**	1600 mm**	600 kg	Electric 230V 50Hz - 1.1KW 7.4A	350 kg
1200 WTI*	804456							

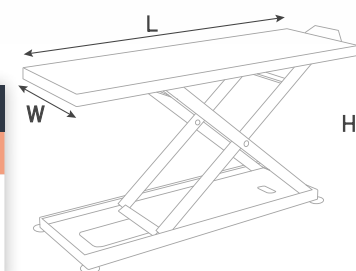

AVAILABLE OPTIONS


MOTOFIXE

AUTOMATIC MOTOFIXE  
Ref. 801590  
See page 52

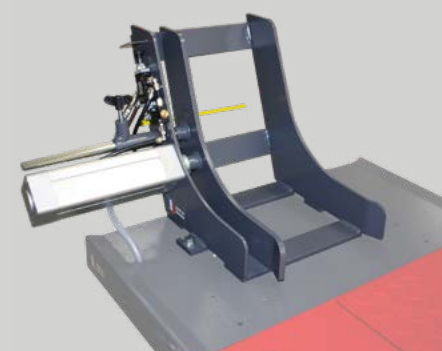

PNEUMATIC OUTLET

Ref. 801356

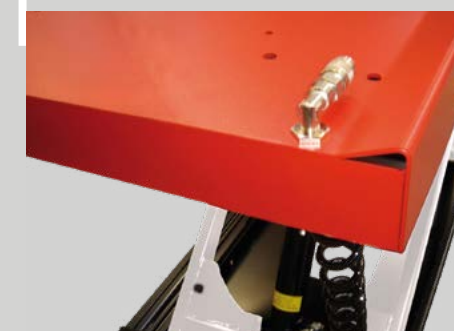

S.STEEL BRACKET FOR AUTO. STRAPS

Sold by the unit  
Strongly recommended for flat lifts  
Ref. 804424




AUTOMATIC STRAPS

Sold by the unit  
Ref. 800860  
See page 126




MAROLO LIFT

# MAROLOLIFT

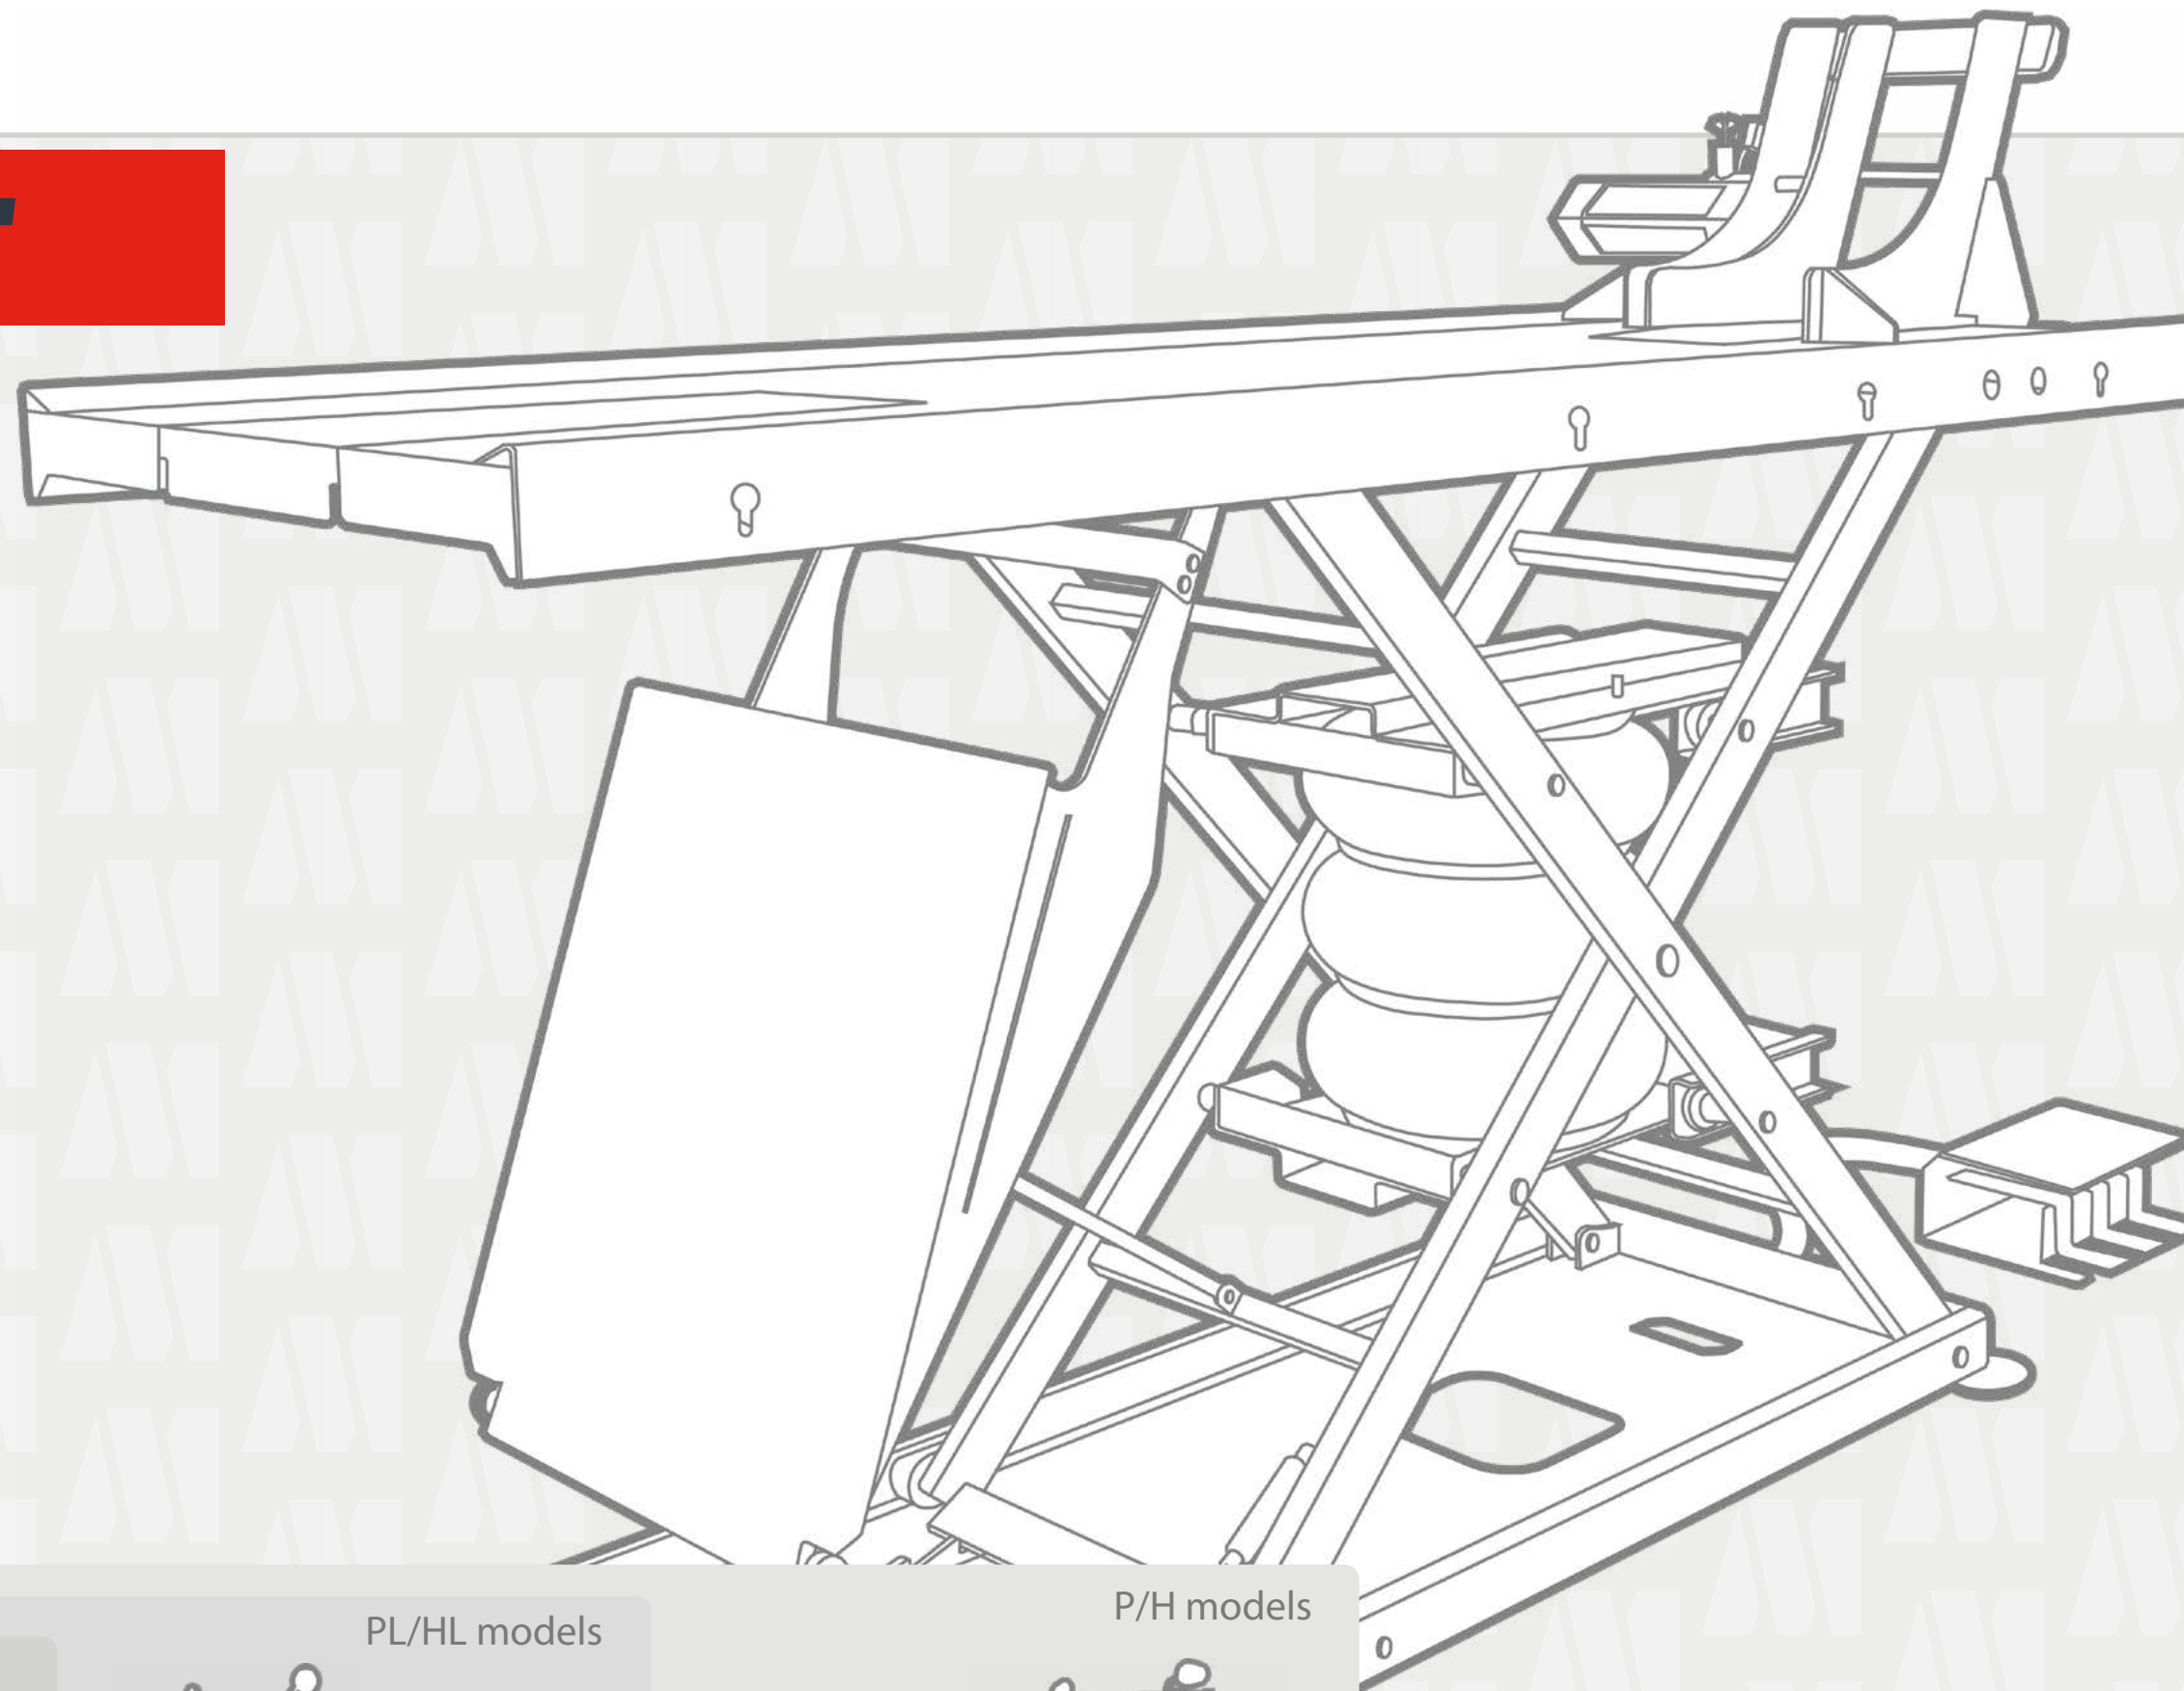


## MOTORCYCLE LIFTS


PCL/HCL models

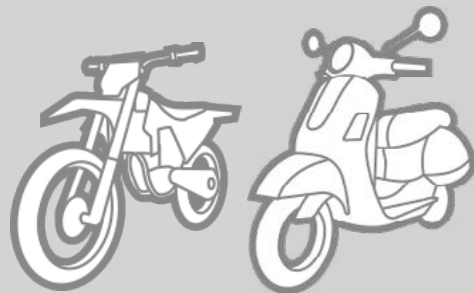

PL/HL models



P/H models

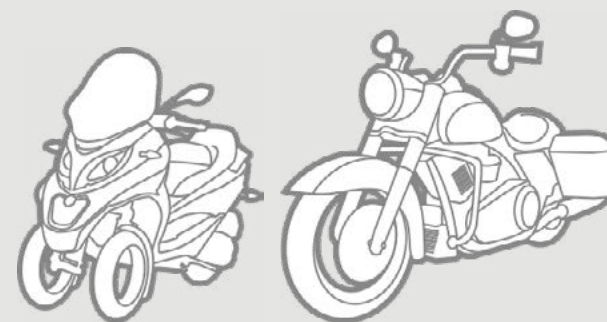



MOTORCYCLE LIFTS - P MODELS

COMPATIBLE WITH



CAPACITY




POWER SUPPLY



1200 P MODEL




1000 P MODEL

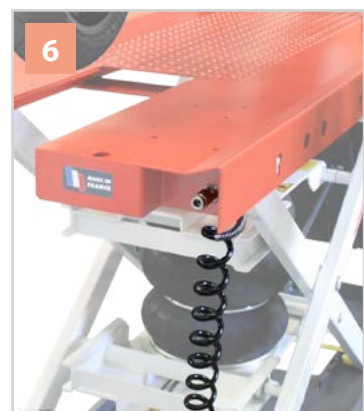

PRODUCT SPECIFICATIONS

MODEL	REFERENCE	MAX H	L	W	CAPACITY	POWER SUPPLY	SAFETY SYSTEM	WEIGHT
1000 P	804020	1000 mm	2200 mm	750 mm	400 kg	Pneumatic	Automatic	240 kg
1200 P*	804050	1200 mm			600 kg	8 Bar		270 kg


\* Model available as in-ground model, with automatic safety system, buzzer signal and wall-mounted control panel. See page 50

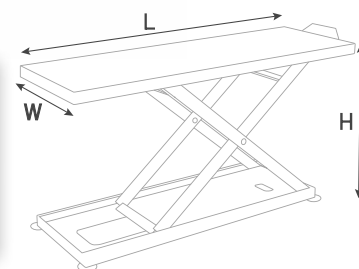

AVAILABLE OPTIONS

MOTOFIXE

AUTOMATIC MOTOFIXE  
Ref. 801590  
See page 52



MOTOFIXE  
Ref. 801430  
See page 52



LIFTING CRANES

ADDICRANE  
Ref. 801427  
See page 53




ADDILIFT  
Ref. 801530  
See page 54



AUTOMATIC STRAPS

Sold by the unit  
Ref. 800860  
See page 126

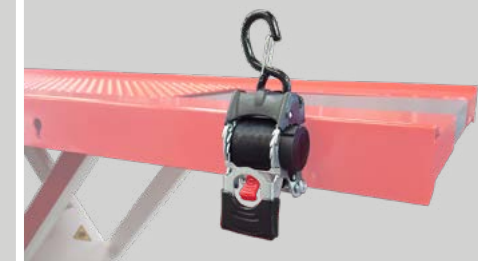



MOTORCYCLE LIFTS - PL MODELS

COMPATIBLE WITH



CAPACITY



POWER SUPPLY




Heavy-duty design, suited for motorcycles and scooters

- 1 Manual safety mechanism
- 2 Removable access ramp
- 3 Smooth steel platform with raised edges to keep tools from falling off
- 4 Read trap door
- 5 Pneumatic jack, the lift only requires compressed air to operate



1200 PL MODEL

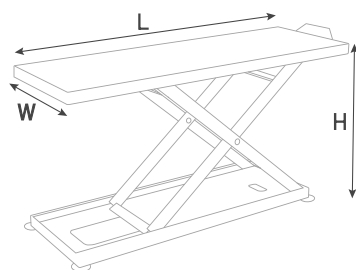

PRODUCT SPECIFICATIONS								
MODEL	REFERENCE	MAX H	L	W	CAPACITY	POWER SUPPLY	SAFETY SYSTEM	WEIGHT
1000 PL	804010	1000 mm	2200 mm	750 mm	400 kg	Pneumatic 8 Bar	Manual	220 kg
1200 PL*	804040	1200 mm			600 kg			

\* Model available as in-ground model, with automatic safety system, buzzer signal and wall-mounted control panel. See page 50

MOTOFIXE

MOTOFIXE  
Ref. 801430  
See page 52



PNEUMATIC OUTLET

Ref. 801348



RETRACTABLE ACCESS RAMP

Ref. 801437  
Reinforced chequered plate  
Wide and automatic  
See page 50



MAROLO

AUTOMATIC STRAP


Sold by the unit  
Ref. 800860  
See page 126



MAROLO

ANTI-SLIP PLATE

Protects the platform when using  
the motorcycle stand  
Ref. 801352  
See page 51



ADDICRANE

Ref. 801427  
See page 53



Tel. +33 (0)2 41 29 29 29 - Email. contact@marolotest.com

1000 PCL - MOTORCYCLE LIFT

Heavy-duty design, suited for lightweight vehicles

- 1 Manual safety mechanism
- 2 Removable access ramp
- 3 Smooth steel platform, suited for lightweight vehicles
- 4 Pneumatic jack, the lift only requires compressed air to operate

COMPATIBLE WITH



CAPACITY



POWER SUPPLY



PRODUCT SPECIFICATIONS								
MODEL	REFERENCE	MAX H	L	W	CAPACITY	POWER SUPPLY	SAFETY SYSTEM	WEIGHT
1000 PCL	804000	1000 mm	2000 mm	660 mm	400 kg	Pneumatic 8 Bar	Manual	180 kg

AVAILABLE OPTIONS

AVAILABLE OPTIONS



MOTORCYCLE LIFTS - H MODELS

COMPATIBLE WITH




CAPACITY



POWER SUPPLY



Magnetic remote controller

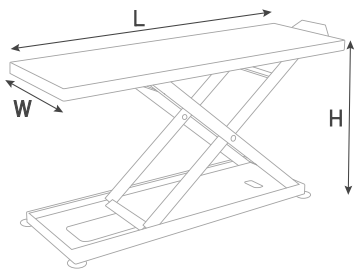

PRODUCT SPECIFICATIONS


MODEL	REFERENCE	MAX H	L	W	CAPACITY	POWER SUPPLY	SAFETY SYSTEM	WEIGHT
1000 H	804092	1000 mm	2200 mm	750 mm	500 kg	Electric 230V - 50Hz - 1.1 KW - 7.4 A Pneumatic 8 Bar	Automatic	240 kg
1200 H*	804122	1200 mm			600 kg			270 kg

\* Model available as in-ground model, with automatic safety system, buzzer signal and wall-mounted control panel. See page 50

AVAILABLE OPTIONS

MOTOFIXE

AUTOMATIC MOTOFIXE  
Ref. 801590  
See page 52



MOTOFIXE  
Ref. 801430  
See page 52



LIFTING CRANES

ADDICRANE  
Ref. 801427  
See page 53



ADDILIFT  
Ref. 801530  
See page 54



AUTOMATIC STRAPS

Sold by the unit  
Ref. 800860  
See page 126





MOTORCYCLE LIFTS - HL MODELS

COMPATIBLE WITH



CAPACITY



POWER SUPPLY



Heavy-duty design, suited for motorcycles and scooters

1 Manual safety mechanism

2 Removable access ramp

3 Smooth steel platform, suited for heavy vehicles


4 Rear trap door

5 Hydraulic jack



1200 HL MODEL

1200 HL MODEL - LOW POSITION

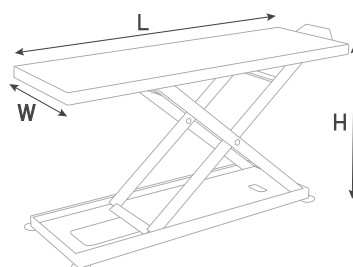

700 mm

PRODUCT SPECIFICATIONS

MODEL	REFERENCE	MAX H	L	W	CAPACITY	POWER SUPPLY	SAFETY SYSTEM	WEIGHT
1000 HL	804082	1000 mm	2200 mm	750 mm	500 kg	Electric 230V - 50Hz - 1.1 KW - 7.4 A	Manual	205 kg
1001 HL	804080					Foot pump		200 kg
1200 HL*	804112	1200 mm			600 kg	Electric 230V - 50Hz - 1.1 KW - 7.4 A		230 kg

\* Model available as in-ground model, with automatic safety system, buzzer signal and wall-mounted control panel. See page 50

MOTOFIXE

MOTOFIXE  
Ref. 801430  
See page 52



PNEUMATIC OUTLET

Ref. 801348



RETRACTABLE RAMP

Ref. 801437  
Reinforced chequered plate  
Wide and automatic  
See page 50



COMPATIBLE WITH



CAPACITY



POWER SUPPLY



Heavy-duty design, suited for lightweight two-wheelers

1 Manual safety mechanism

2 Removable access ramp

3 Smooth steel platform, suited for lightweight vehicles

4 Hydraulic jack




1000 HCL MODEL

1001 HCL MODEL

→ Foot pump-operated



HCL MODEL - LOW POSITION



700 mm

PRODUCT SPECIFICATIONS

MODEL	REFERENCE	MAX H	L	W	CAPACITY	POWER SUPPLY	SAFETY SYSTEM	WEIGHT
1000 HCL	804072	1000 mm	2000 mm	660 mm	500 kg	Electric 230V - 50Hz - 1.1 KW - 7.4 A	Manual	160 kg
1001 HCL	804070					Foot pump		165 kg

AVAILABLE OPTIONS

AVAILABLE OPTIONS

AUTOMATIC STRAP


Sold by the unit  
Ref. 800860  
See page 126



ANTI-SLIP PLATE

Protects the platform when using  
the motorcycle stand

Ref. 801352  
See page 51




ADDICRANE

Ref. 801427  
See page 53






# MODULIFT

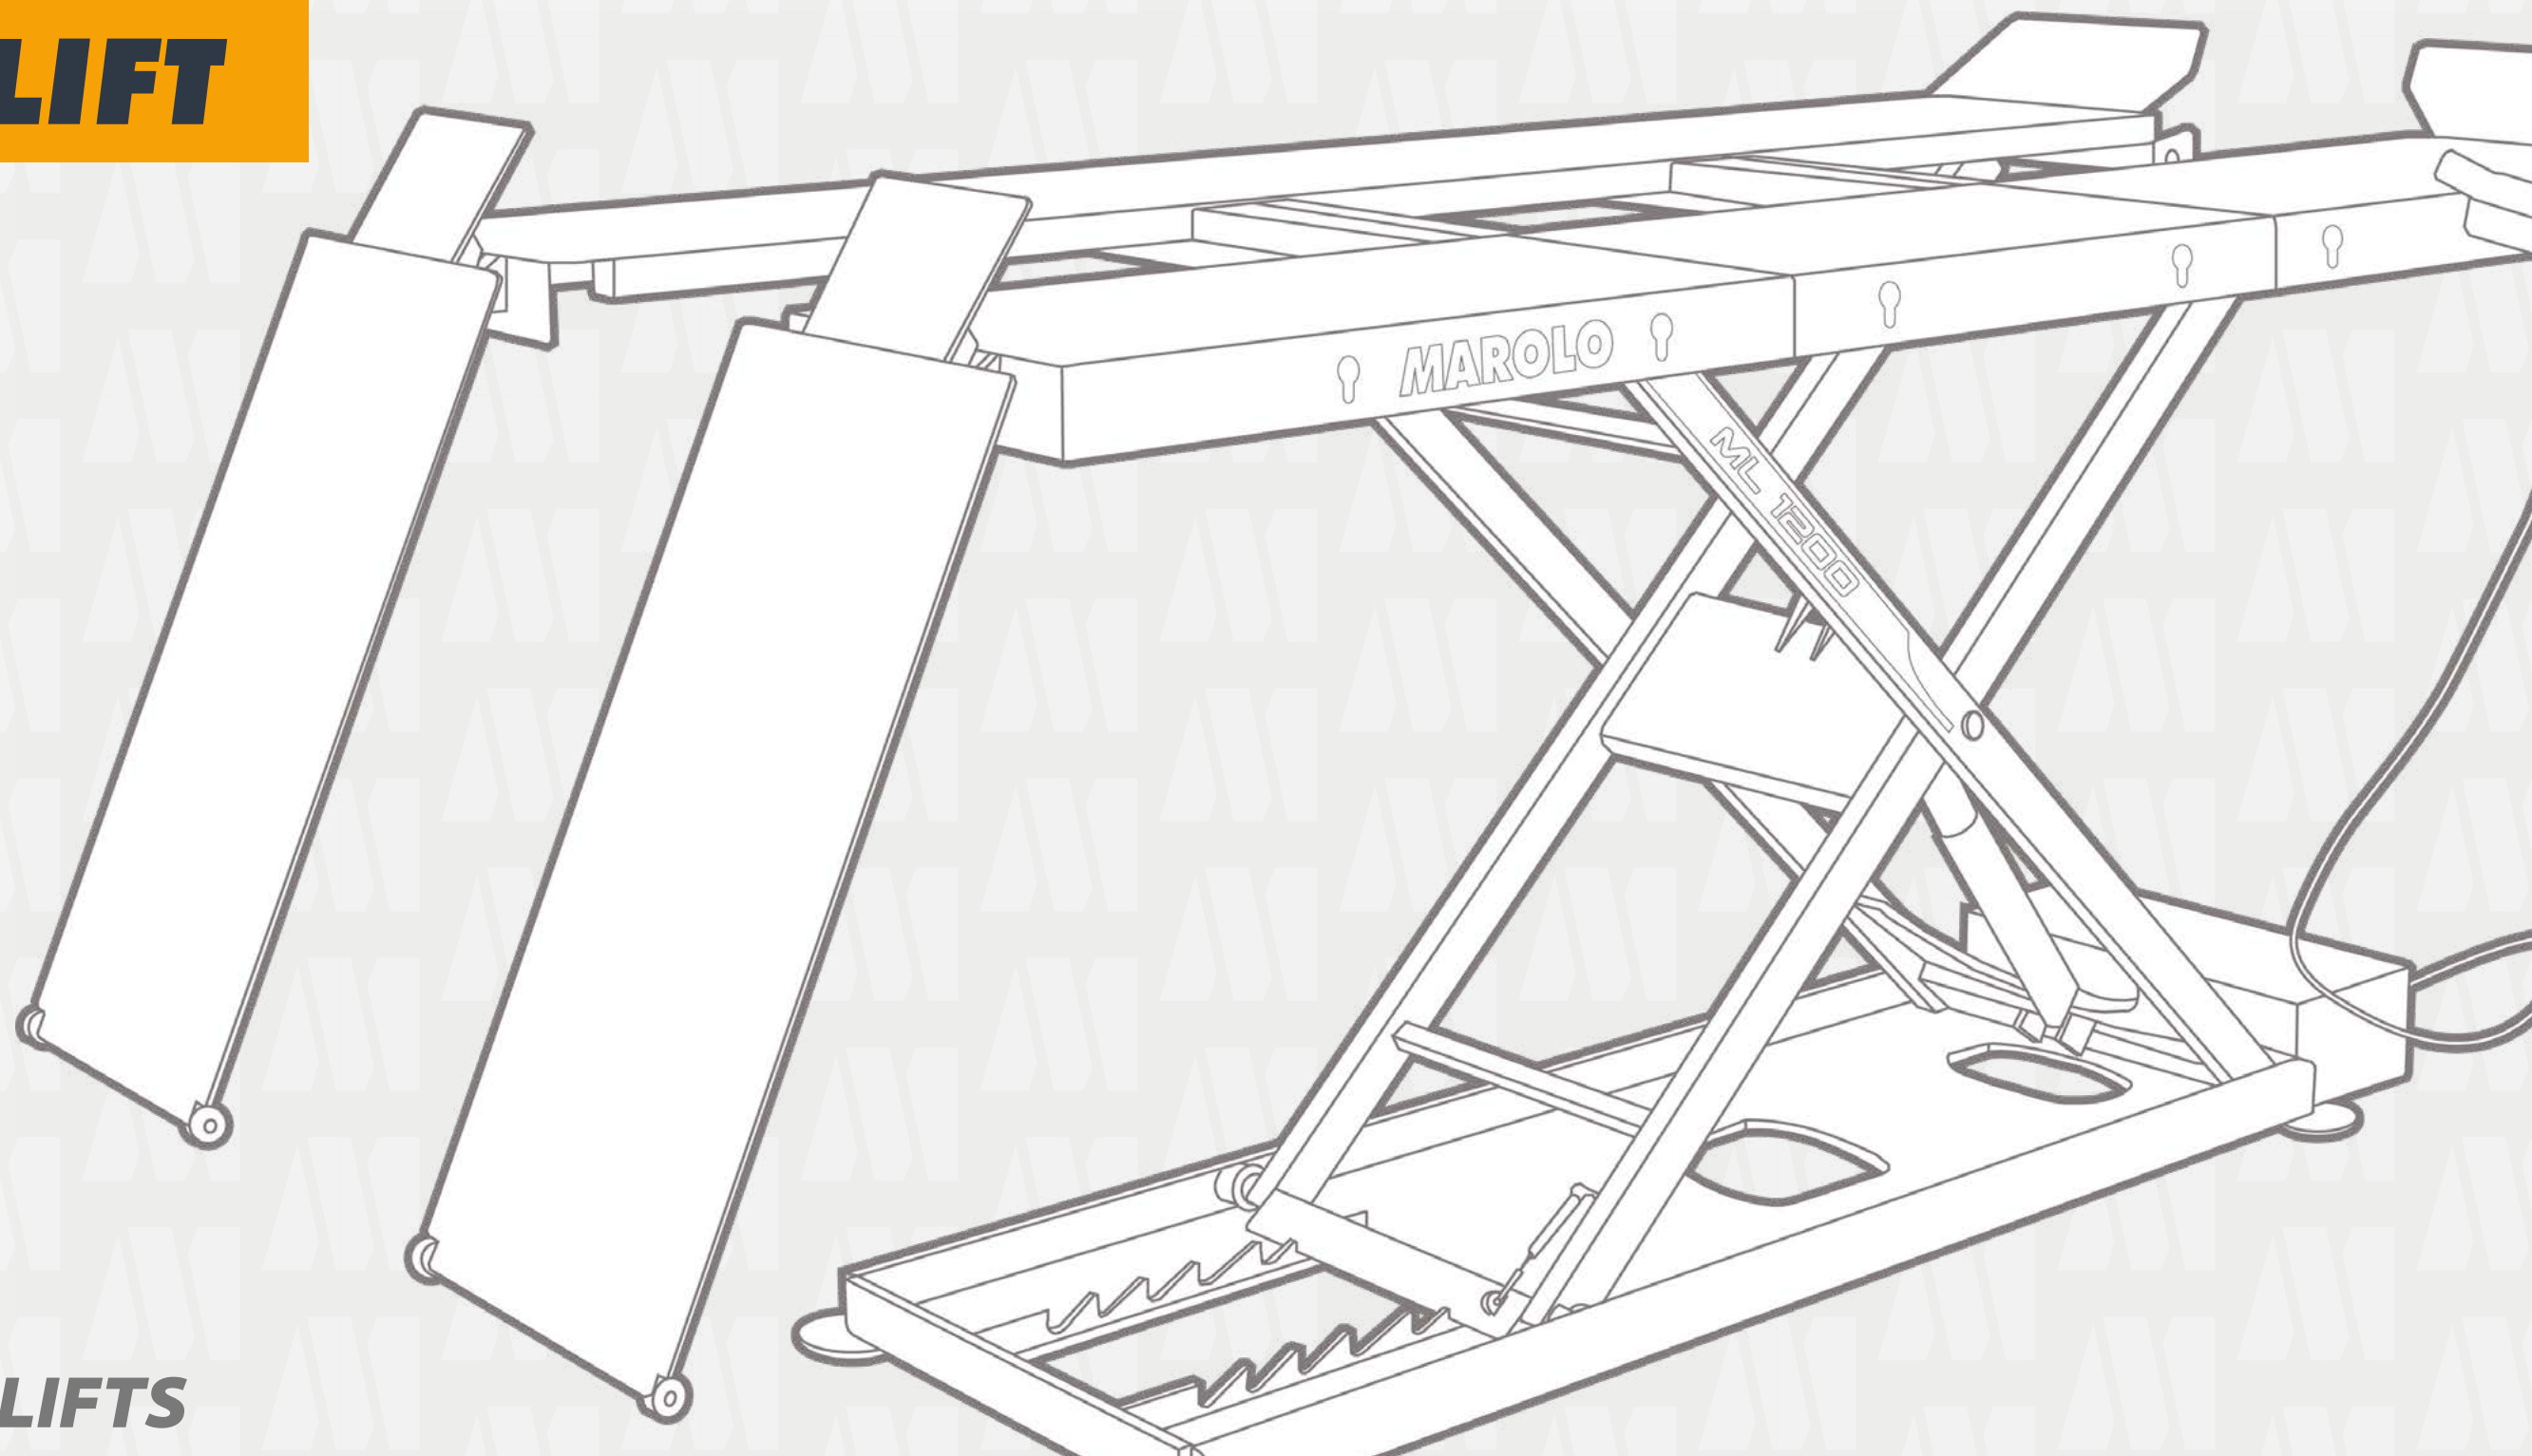


## MODULAR LIFTS


2 wheels

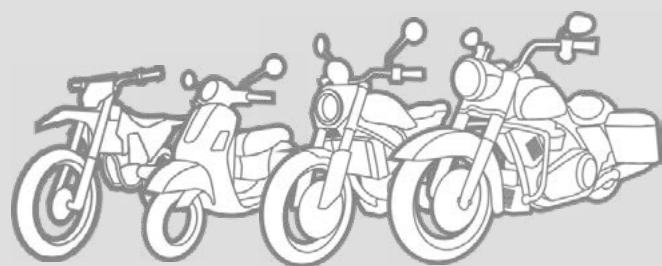


3 wheels

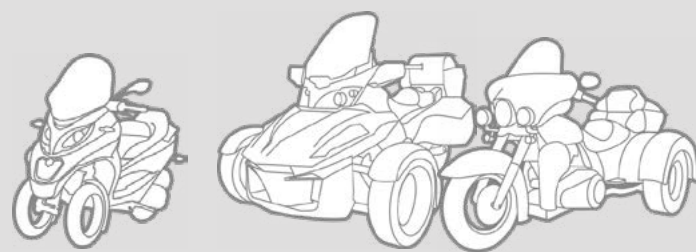


4 wheels

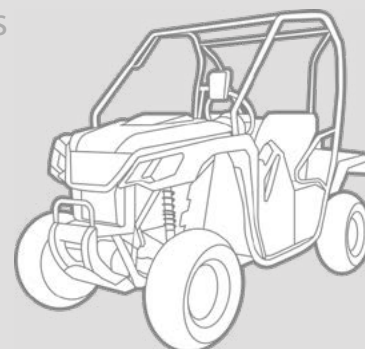


Closed platform

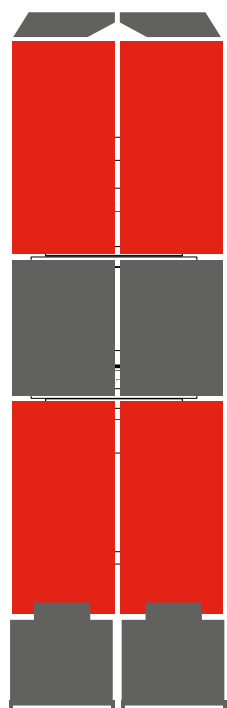


Closed platform without central plates

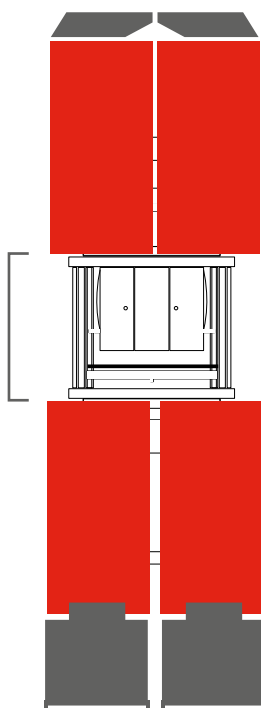


Closed platform with front plates opened

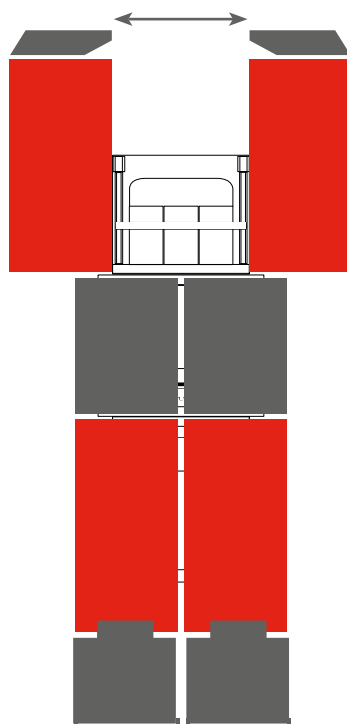


Closed platform with back plates opened

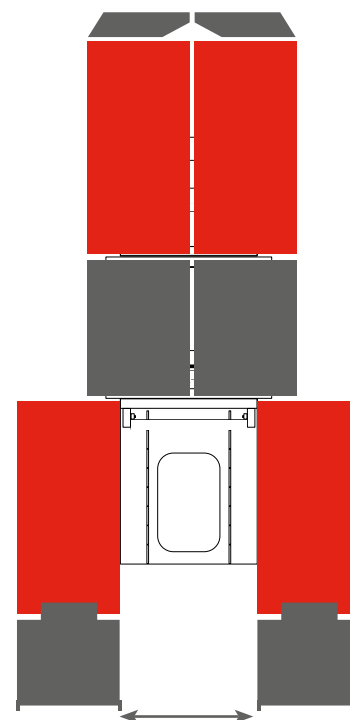

Opened platform

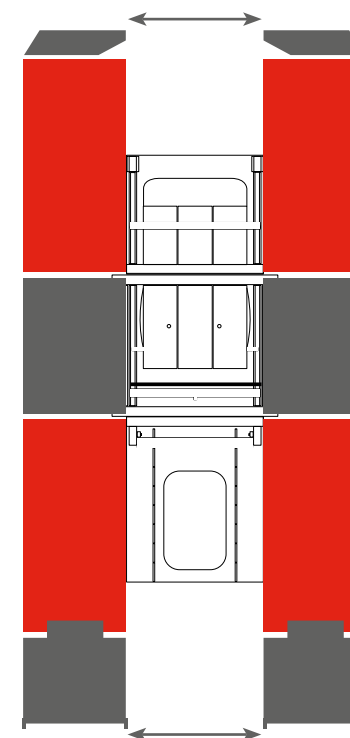

Opened platform without central plates

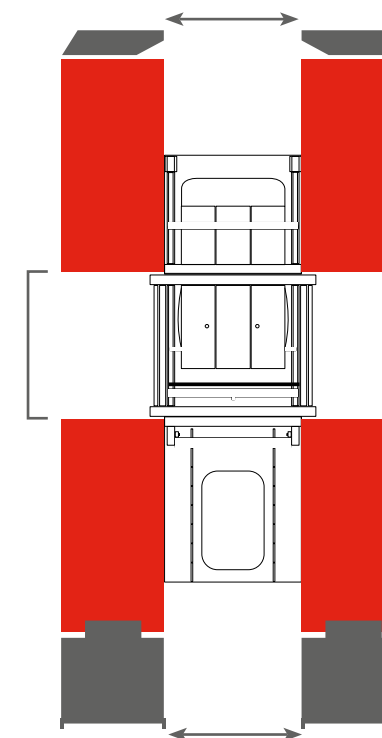

## THE PATENTED MODULIFT CONCEPT

- Platform comprised of 6 individual plates
- Each plate slides individually
- Central plates (grey) can be removed




- Modular platform adaptable to the vehicle's width
- Designed for professional use
- 2 power supply options : Hydraulic and pneumatic
- heavy-duty design
- CE compliant





MODULIFT LIFTS - MOP MODELS

COMPATIBLE WITH



CAPACITY





POWER SUPPLY



Heavy-duty design, suited for 2-, 3- and 4-wheeled vehicles

- Platform comprised of 6 individual plates, with both central plates removable
- Automatic safety system
- Pneumatic outlet (to power pneumatic tooling)
- Wide and automatic access ramps
- Pneumatic jack, the lift only requires compressed air to operate

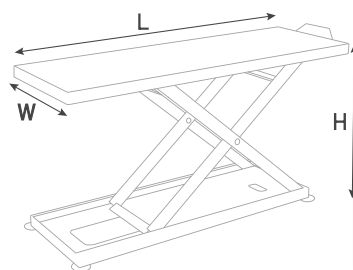

PRODUCT SPECIFICATIONS

MODEL	REF.	H	L	max W	min W	CAPACITY	POWER SUPPLY	SAFETY SYSTEM	WEIGHT
1200 MOP	801534	1200 mm	2300 mm	1300 mm	800 mm	600 kg	Pneumatic 8 Bar	Automatic	310 kg
1200 MOP XL	801556		2500 mm	1500 mm	900 mm				390 kg

MODULIFT LIFTS - MOH MODELS

COMPATIBLE WITH



CAPACITY




POWER SUPPLY



Heavy-duty design, suited for 2-, 3- and 4-wheeled vehicles

- Platform comprised of 6 individual plates, with both central plates removable
- Automatic safety system (1200 MOH and 1200 MOH XL models)
- Pneumatic outlet (to power pneumatic tooling)
- Wide and automatic access ramps
- Heavy-duty hydraulic jack



PRODUCT SPECIFICATIONS

MODEL	REF.	H	L	max W	min W	CAPACITY	POWER SUPPLY	SAFETY SYSTEM	WEIGHT
1000 MOH	801539	1000 mm	2300 mm	1300 mm	800 mm	500 kg	Electric 230V - 50Hz - 1.1K - 7.4A*	Manual	280 kg
1200 MOH	801535					600 kg			310 kg
1200 MOH XL	801555	1200 mm	2500 mm	1500 mm	900 mm	600 kg	Electric 230V - 50Hz - 1.1K - 7.4A + Pneumatic 8 Bar	Automatic	390 kg

\* Compressed air (8 Bar ) required to use a Motofixe wheel clamp


AVAILABLE OPTIONS

MOTOFIXE

MODULIFT MOTOFIXE  
Ref. 801435



Closed position

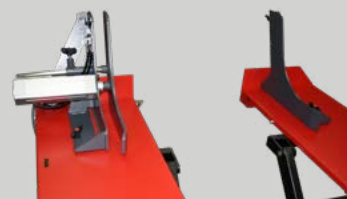

Opened position

3rd WHEEL KIT

For 1200 MOP XL / MOH XL :  
Ref. 801529  
for 1200 MOPE XL / MOHE XL (=in-ground) :  
Ref. 801550



AUTOMATIC STRAP

Sold by the unit  
Ref. 800860  
See page 126



REAR STAND

Ref. 800538  
See page 55



ADDICRANE

Ref. 801427  
See page 53



AVAILABLE OPTIONS



MODULIFT LIFT - 1400 MOH MODELS

COMPATIBLE WITH



CAPACITY



POWER SUPPLY



Suited for heavy vehicles

Heavy-duty design, for use with 2-, 3-, or 4-wheeled vehicles

1 Platform comprised of 6 individual plates, with both central plates removable

2 Automatic safety system

3 Pneumatic outlet (to power pneumatic tooling)



4 Wide and automatic access ramps

5 Dual hydraulic jacks



CARACTÉRISTIQUES TECHNIQUES

MODEL	REF.	H	L	max W	min W	CAPACITY	POWER SUPPLY	SAFETY SYSTEM	WEIGHT
1400 MOH	801532	1400 mm	2500 mm	1500 mm	900 mm	1200 kg	Electric 230V - 50Hz 1.5KW - 95A	Automatic	490 kg
1400 MOH XL	801542		2800 mm	1700 mm	1100 mm	800 kg	+ Pneumatic 8 Bar		535 kg

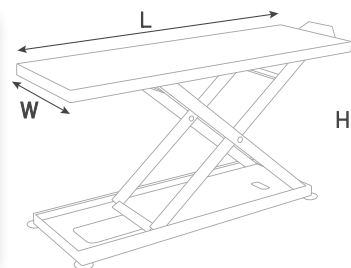

AVAILABLE OPTIONS

MOTOFIXE

MODULIFT MOTOFIXE  
Ref. 801435



Closed position

Opened position

3rd WHEEL KIT

For 1400 MOH : Ref. 801529  
For 1400 MOHE (=in-ground) : Ref. 801550  
For 1400 MOH XL : Ref. 801551  
For 1400 MOHE XL (=in-ground) : Ref. 801553



MAROLO

MODULIFT LIFTS - 1400 MOH XL MODEL

COMPATIBLE WITH



CAPACITY



POWER SUPPLY



AVAILABLE OPTIONS

AUTOMATIC STRAP

Sold by the unit  
Ref. 800860  
See page 126



MAROLO

PLATFORM EXTENSION KIT

For 1400 MOH XL model only  
Adds up to 400 mm to platform length  
Ref. 801552



ADDICRANE

Ref. 801427  
See page 53



Tel. +33 (0)2 41 29 29 29 - Email. contact@marolotest.com




## BLACK COLLECTION

Several lifts and accessories are also available in black.



REACH OUT TO US  
FOR A QUOTE

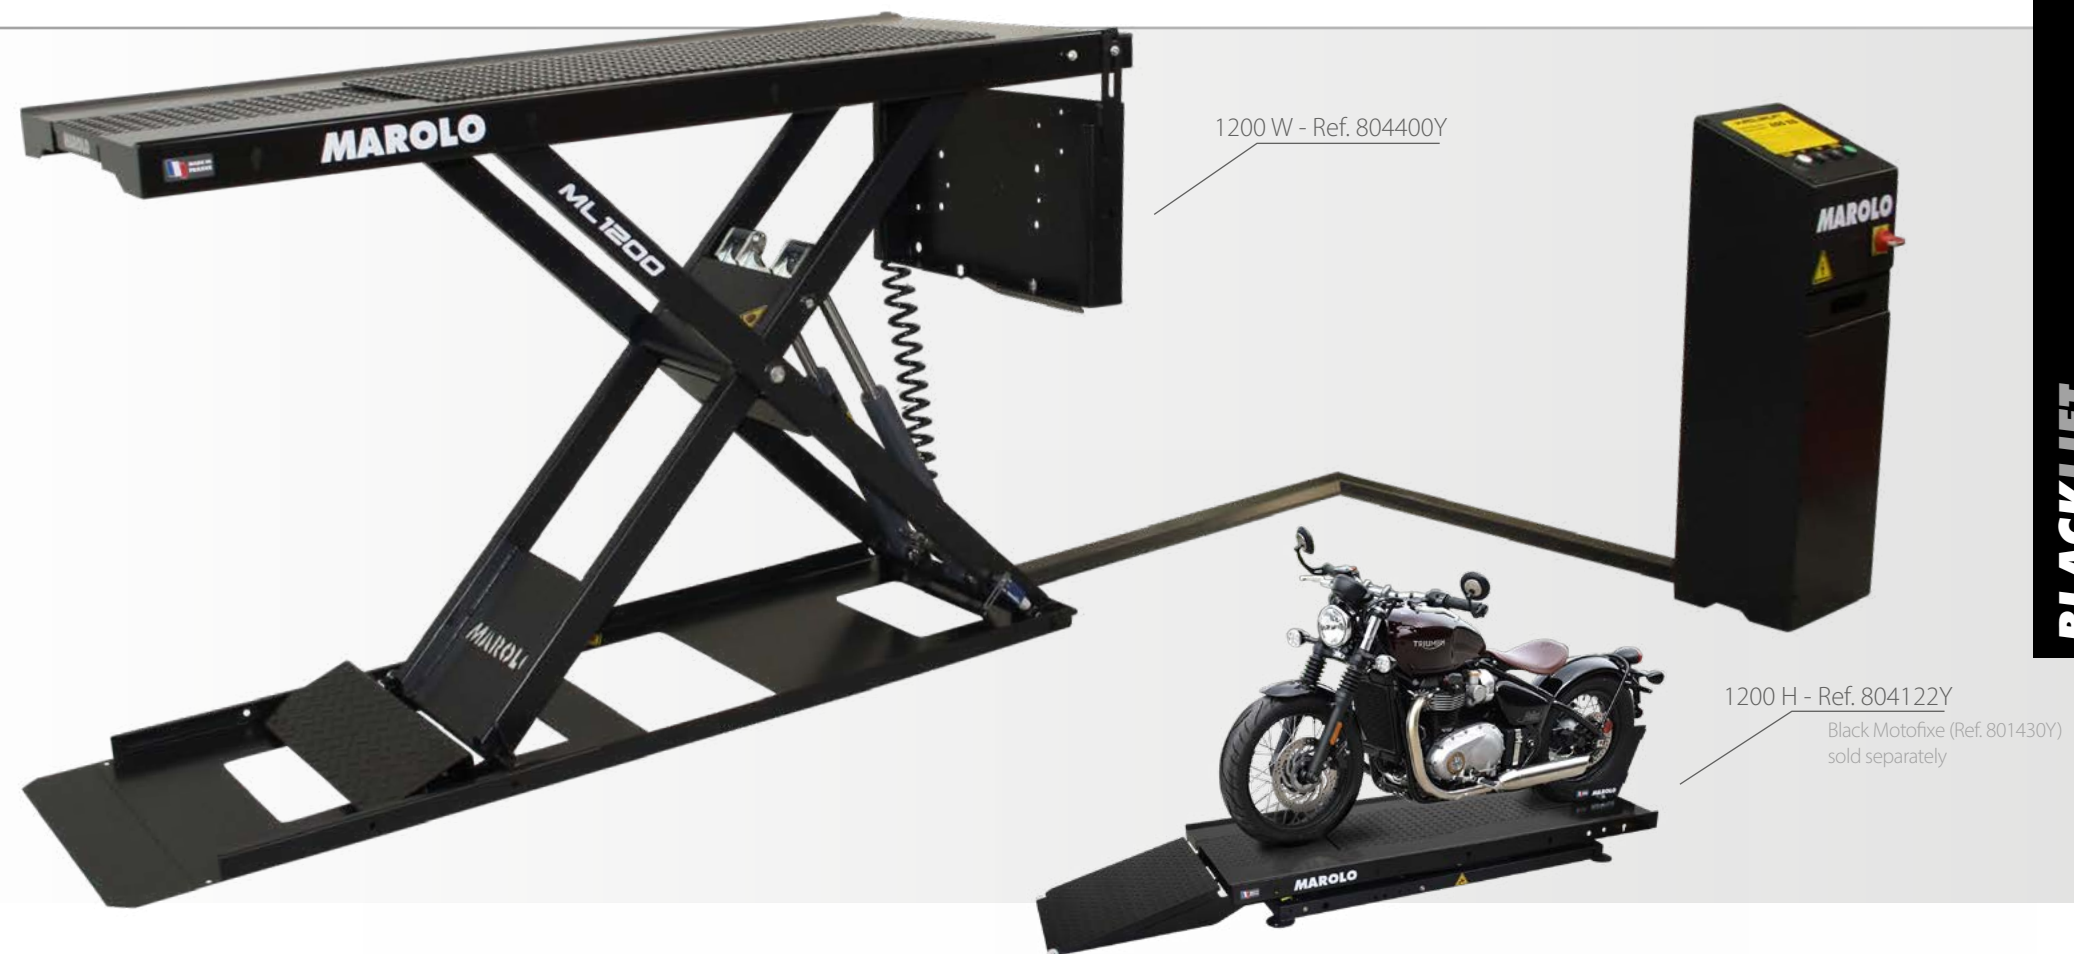



## CUSTOM COLORWAYS

To suit your brand aesthetic or to liven up the workshop, we put our skills at your service and customize your equipment.




**REACH OUT TO US  
FOR A QUOTE**






# MAROLOE-LIFT

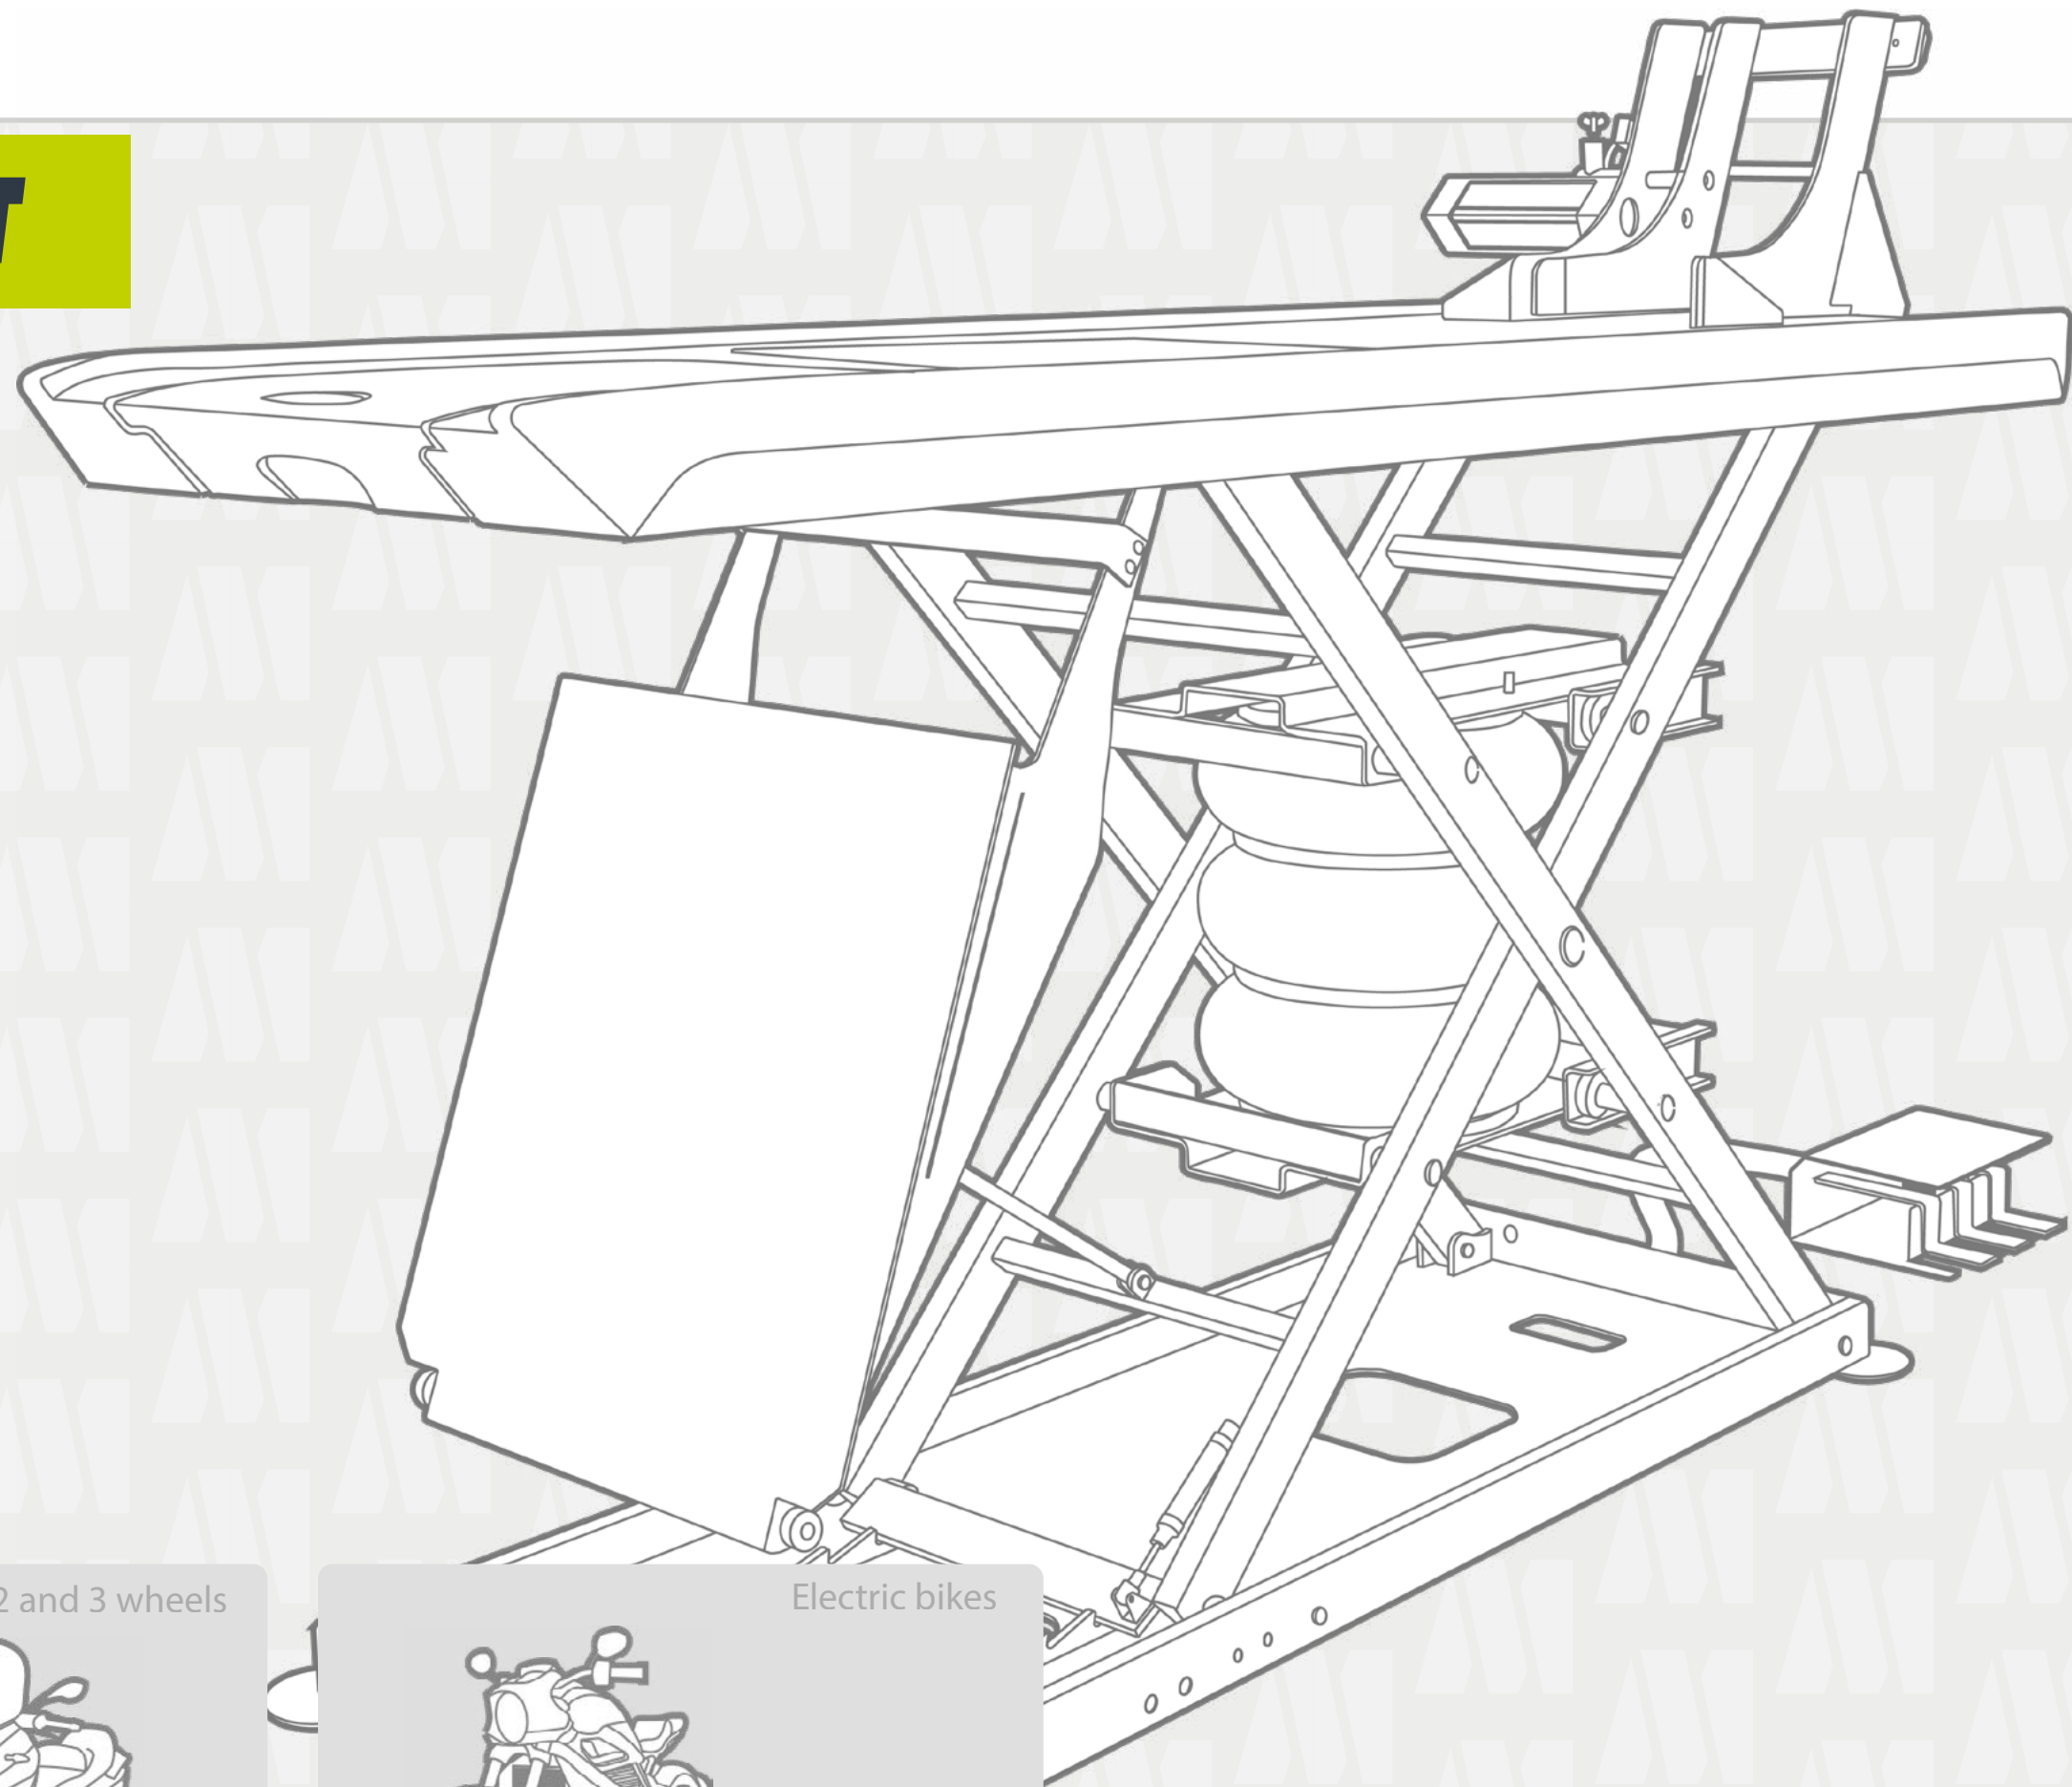


## ELECTRIC BIKE LIFT

2 and 3 wheels

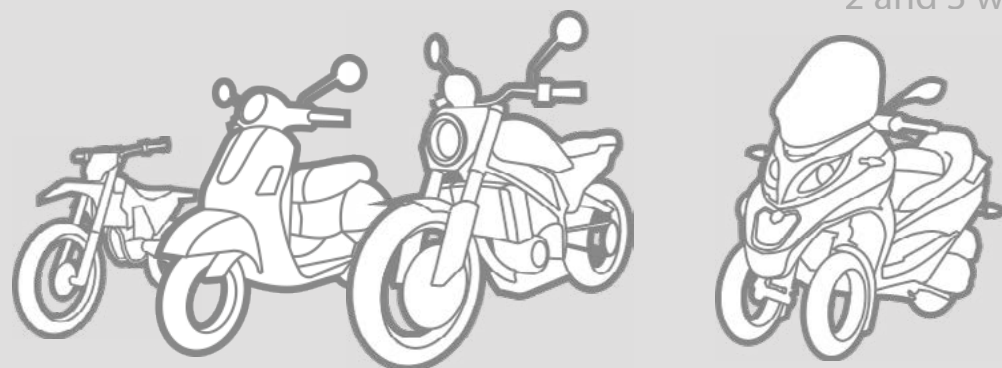

Electric bikes

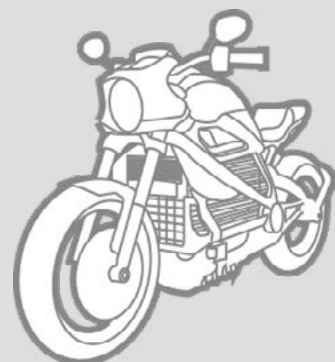

# THE E-LIFT CONCEPT

The 1<sup>st</sup> ever motorcycle lift designed for E-bikes

The advent of electric bikes implies new challenges when it comes to workplace safety :  
On a standard lift with a steel platform, the vehicle resting on its stand is not electrically insulated.

This situation puts the technician leaning against the lift at risk of an electric shock.  
Existing protections such as insulating mats and coatings tend to suffer from wear, and lose their ability to protect over time.

MAROLO offers a unique solution :

A lift especially designed for the maintenance of electric bikes, **under optimal safety conditions.**



**FIRST SHOWN AT  
ADM SAN DIEGO  
★ 2018 ★**





# THE E-LIFT CONCEPT



## «E-Motofixe» wheel clamp

- The specialized wheel clamp is equipped with non-conductive plastic protections, providing electrical isolation and preventing scuffs on the rim.

Ref. 807400



## Insulating mini-lift wedge

- The mini-lift's platform is protected by an insulating, textured teflon plate.
- Only compatible with the MAROLO MINILIFT pneumatic lift

Ref. 807600




## Grounding

- 1 A ground terminal on the platform allows the operator to properly secure the vehicle and working area.
- 2 The E-lift should be grounded to ensure protection.



## Rotomoulded plastic platform

- The non-conductive platform protects the operator from an accidental electrical shock, by isolating the vehicle and its stand.
- Two removable wear plates provide additional protection against scuffing and reinforce the platform.
- The platform includes integrated storage to keep tools organized and within reach.

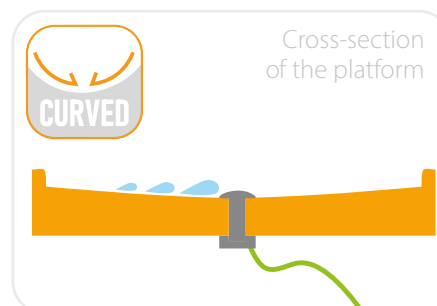

Cross-section of the platform

## Fluid collection

- A slight curve in the platform carries fluids towards the center of the lift, and away from the operator.

● Nut at the collection point

● Ground connection



## Pneumatic energy

- A reliable energy source, used and mastered by MAROLO for over 40 years. The lift doesn't require any electrical power to operate.
- Rules out the eventuality of an accidental electrical discharge propagating to the network, potentially resulting in material or corporeal damage.



1200 ZL - E-LIFT

COMPATIBLE WITH



CAPACITY




POWER SUPPLY





Designed to aid in the maintenance of electrical bikes under optimal safety conditions

- 1 Non-conductive reinforced platform
  - 2 Non-conductive and interchangeable wear plates, easily switched out when worn
  - 3 Pneumatic jack
  - 4 Rear trap door
  - 5 Wide and automatic access ramp
  - 6 Automatic safety system
  - 7 Tool storage integrated into the platform
- Pneumatic outlet (to power pneumatic tooling)

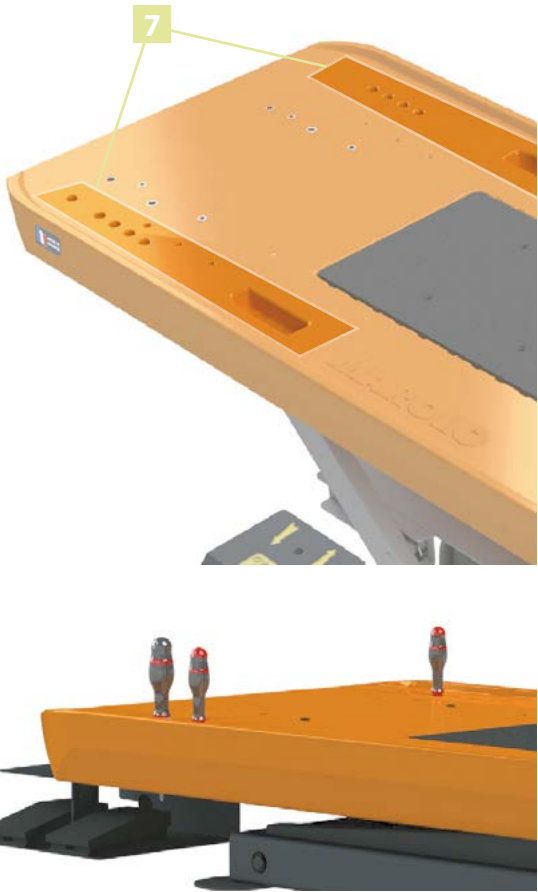

\* E-Motofixe sold separately



PRODUCT SPECIFICATIONS							
MODEL	REF.	H	L	I	CAPACITY	POWER SUPPLY	WEIGHT
1200 ZL	807100	1200 mm	2300 mm	750 mm	400 kg	Pneumatic 8 Bar	270 kg

Model available as in-ground model, with automatic safety system, buzzer signal and wall-mounted control panel. See page 50

AVAILABLE OPTIONS

E-MOTOFIXE

Non-conductive wheel clamp  
Ref. 807400




! IMPORTANT :  
The E-Motofixe is engineered for electrical bike maintenance. Its use, along with the E-lift, is mandatory to guarantee optimal safety conditions.

The use of a standard wheel clamp could put the operator at risk of an electric shock.

WEAR PLATE (REPLACEMENT)


Reinforces and protects the platform  
To be changed periodically with wear  
Sold by the unit  
Ref. 807500

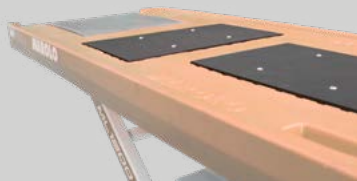



# MAROLO ACCESSORIES

## MOTORCYCLE LIFT ACCESSORIES

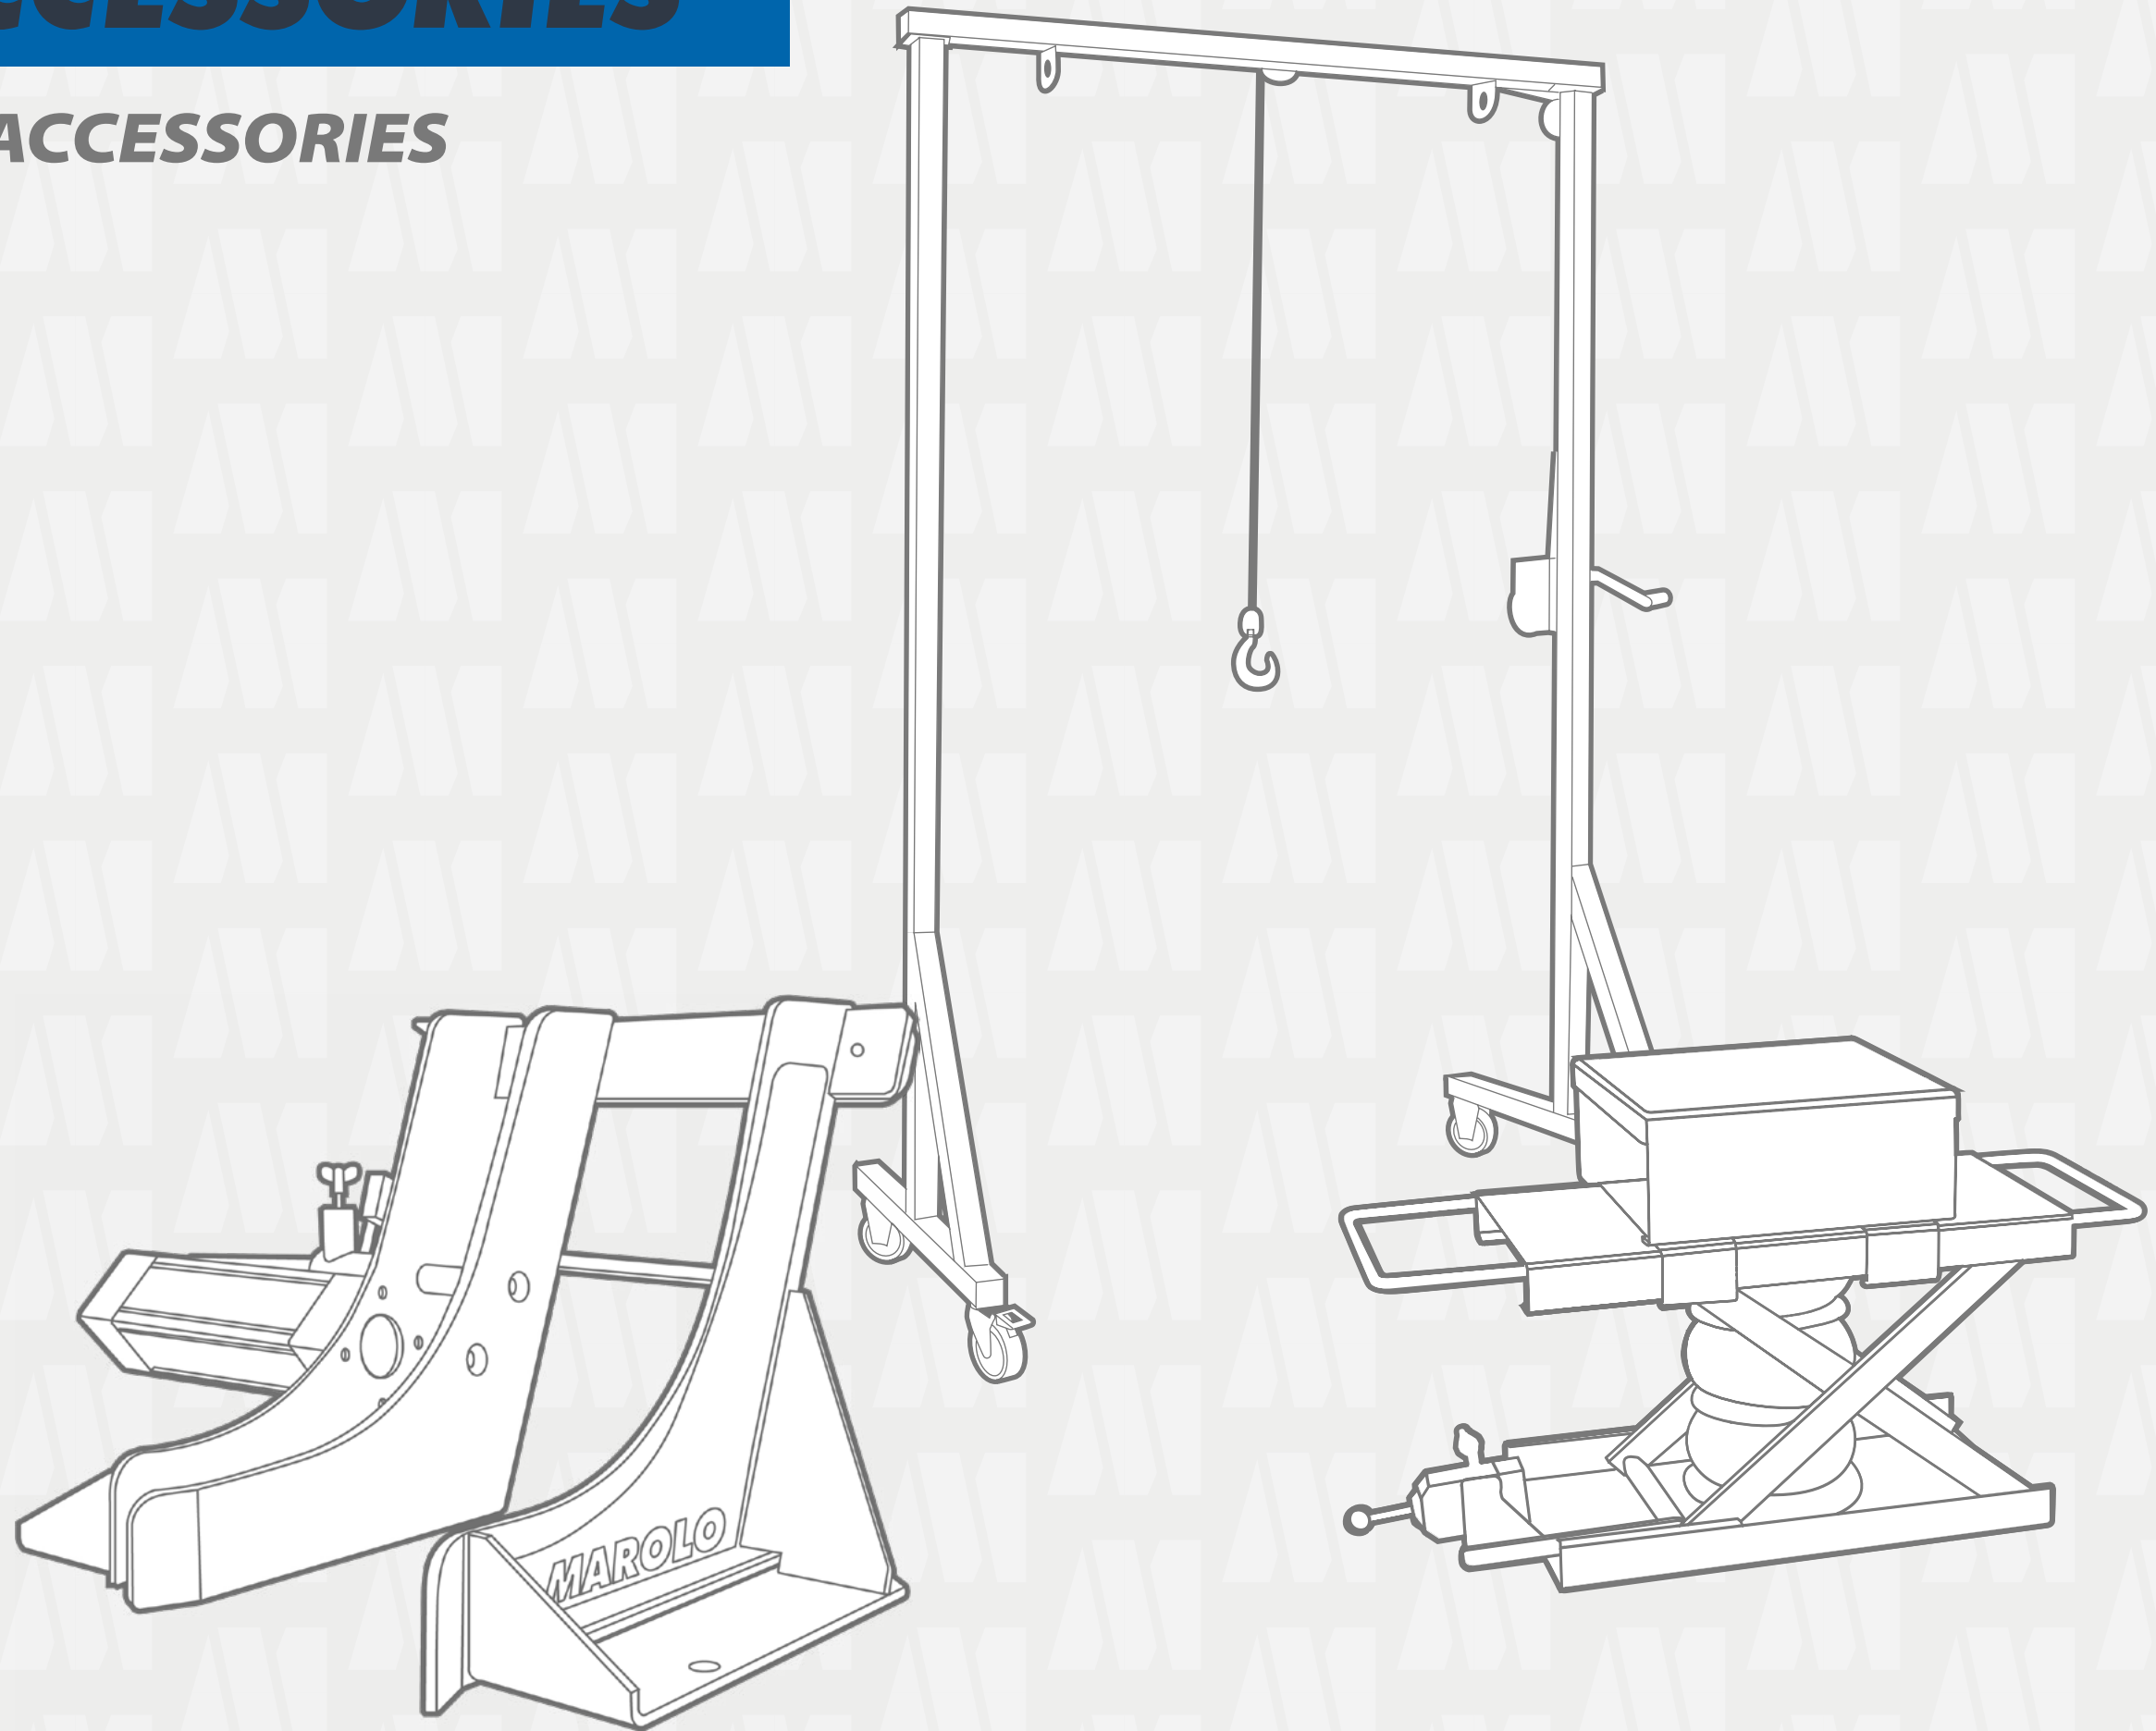


MOTORCYCLE LIFT ACCESSORIES

IN-GROUND LIFTS

Some lift models can be recessed into the ground to make the platform level with the floor, making vehicle installation easier. A sensor and audible signal warn nearby personnel as the platform is lowered, to prevent any injuries. Operated by **A** wall-mounted panel or **B** side console, depending on model.


AVAILABLE MODELS		
MODEL	REF.	CONTROLS
1200 PLE	804041	<b>A</b>
1200 PE	804051	<b>A</b>
1200 HLE	804113	<b>A</b>
1200 HE	804123	<b>A</b>
1200 WE	804403	<b>B</b>
1200 WAE	804453	<b>B</b>
1200 WRE	804461	<b>B</b>
1200 MOPE	801536	<b>A</b>
1200 MOPE XL	801558	<b>A</b>
1200 MOHE	801537	<b>A</b>
1200 MOHE XL	801559	<b>A</b>
1400 MOHE	801547	<b>A</b>
1400 MOHE XL	801543	<b>A</b>
1200 ZLE	807101	<b>A</b>

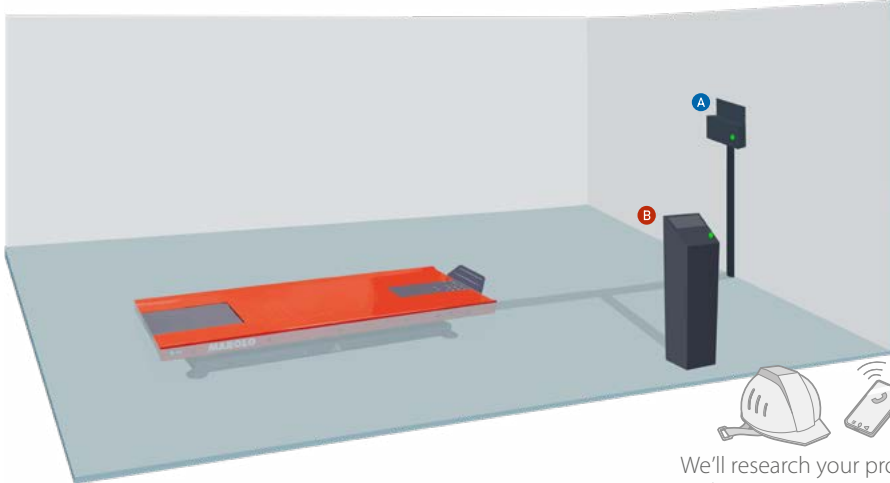

We'll research your project  
☎ +33 (0)2 41 29 29 29

STEEL CORNER PROTECTOR


Cleanly finishes the edges of the pit for an in-ground lift  
To be trimmed down to size before installation

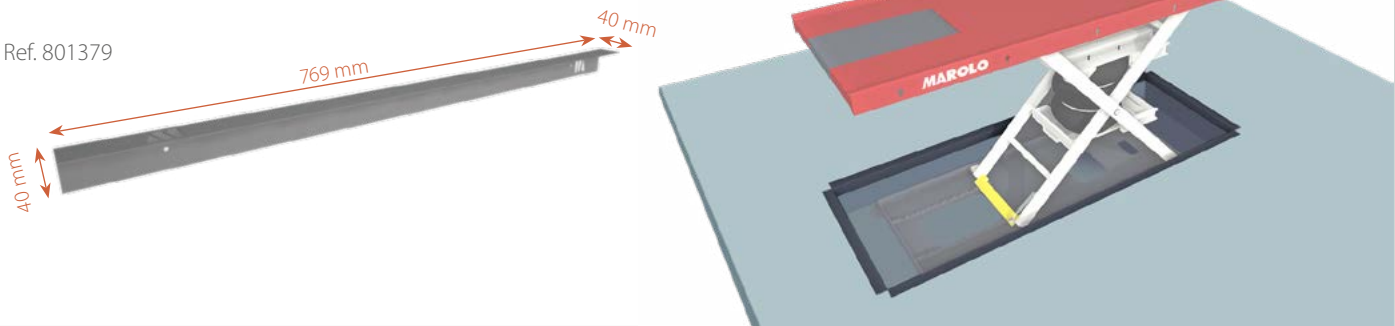

RETRACTABLE RAMP

Wide, reinforced access ramp, completely automated  
Automatically lowers when the lift is lowered  
Retracts under the platform and out of the way when the lift is raised  
Compatible with lift models HCL/PCL and HL/PL

Ref. 801437

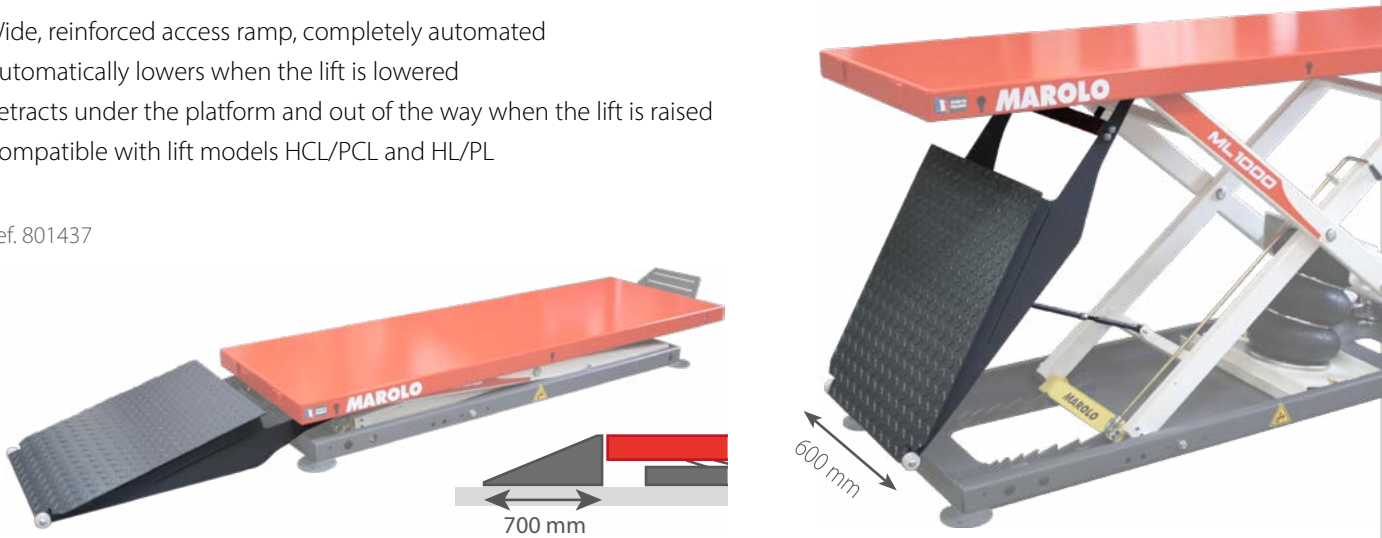

MOTORCYCLE LIFT ACCESSORIES


CONTROL PANEL INTEGRATION

Integration of the lift's control panel into your **SMART**\* furniture.


Flat lift hydraulic cables extension ( + 150 cm ) : Ref. MODIF150  
Flat lift hydraulic cables extension ( + 300 cm ) : Ref. MODIF300



Mural control panel integrated into a tool storage panel



Electro-hydraulic pump (if present) concealed in furniture

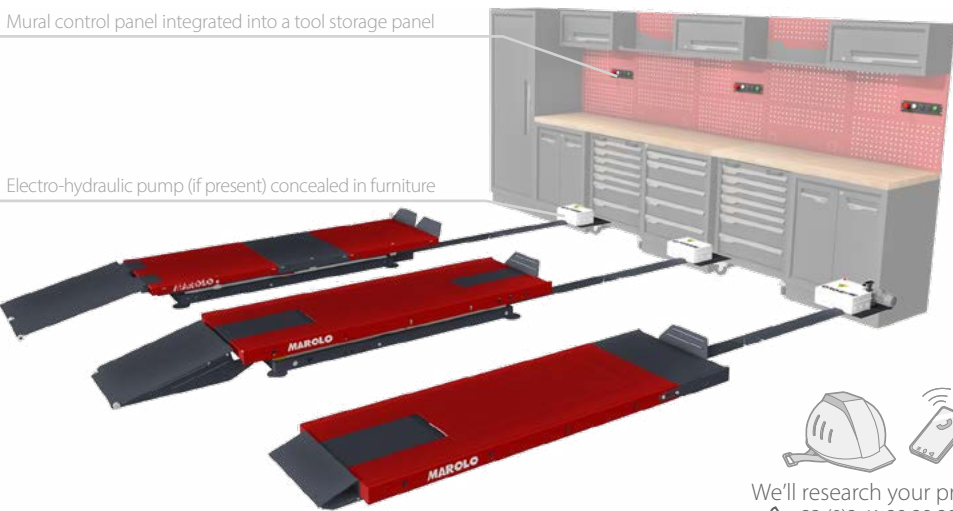

We'll research your project  
☎ +33 (0)2 41 29 29 29

\***SMART** furniture : See page 71

HYDRAULIC FOOT PUMP

Suited for HCL and HL lifts

Ref. 801346



INTEGRATED HYDRAULIC POWER STATION

With magnetic remote controller and E-stop switch

Grey model : Ref. 801351  
Black model : Ref. 801351Y



PNEUMATIC LIFT PEDALBOARDS

For lifts with a manual safety system :

Grey model : Ref. 801353  
Black model : Ref. 801353Y

For lift with an automatic safety system :


Grey model : Ref. 801354  
Black model : Ref. 801354Y



ANTI-SLIP PLATE

Reinforced steel plate  
Protects and reinforces the platform when using the motorcycle's center stand  
Recommended for PCL, HCL, PL and HL models

Ref. 801352

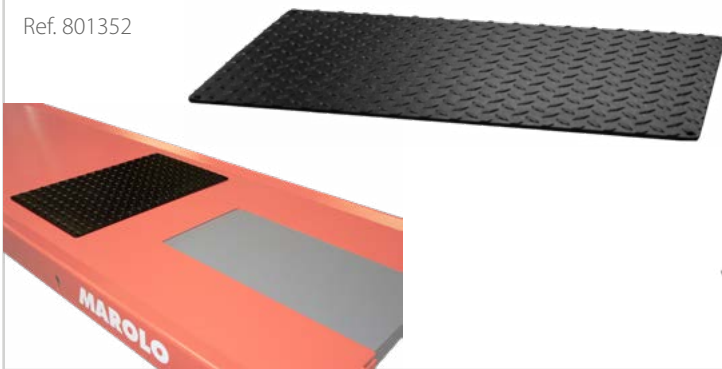

PROTECTIVE CABLE CASINGS

For cables at ground level  
Length : 1100 mm  
Width : 130 mm  
Height : 20 mm  
Pre-cut angle

Available colorways : **GREY** **BLACK**

**GREY** Ref. 801361  
**BLACK** Ref. 801361Y

For cables below ground level  
Length : 1100 mm  
Width : 150 mm  
Height : 2,5 mm  
Pre-cut angle

Ref. 801366





MANUAL MOTOFIXE

Manual closure  
Suited for lifts without a front trap door :  
1200 W, 1000/1200 PL/HL, 1000 PCL/HCL  
Safety system via feeder screw  
Max. opening : 225 mm

Available colorways : GREY BLACK

Ref. 801434  
Ref. 801434Y



MOTOFIXE & AUTO. MOTOFIXE

Heavy-duty design  
Automatic closure \*  
Suited for lifts without a front trap door :  
1200 W, 1000/1200 PL/HL, 1000 PCL/HCL  
Double safety mechanism  
(hydraulic jack + mechanical safety)  
Max. opening : 210 mm

Available colorways : GREY BLACK

Motofixe : Ref. 801430  
Motofixe : Ref. 801430Y  
Automatic Motofixe : Ref. 801590  
Automatic Motofixe : Ref. 801590 Y




\* Only for automatic model

MOTOFIXE NG

Heavy-duty design  
Removable wheel stopper for easy wheel access  
Suited for lifts with a front trap door :  
1200 P and 1200 H  
Slides front to back to fit the vehicle's length  
Double safety mechanism  
(hydraulic jack + mechanical safety)  
Max. opening : 210 mm

Available colorways : GREY BLACK

Motofixe NG : Ref. 801431  
Motofixe NG : Ref. 801431Y  
Automatic Motofixe NG : Ref. 801591  
Automatic Motofixe NG : Ref. 801591

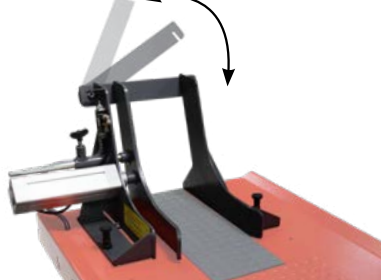

MOTOFIXE MODULIFT

Heavy duty design  
Removable wheel stopper  
Double safety mechanism (hydraulic jack + mechanical safety)  
Automatic closure (Automatic model only)  
Best suited for MODULIFT lifts

Available colorways : GREY BLACK

Motofixe Modulift : Ref. 801435  
Motofixe Modulift : Ref. 801435Y

Automatic Motofixe Modulift : Ref. 801592  
Automatic Motofixe Modulift : Ref. 801592Y

MotoFixe Modulift - closed MotoFixe Modulift - open



MOTOFIXE XL

Heavy-duty design  
Suited for wide wheels  
Supplied with a wedge for use with thinner wheels  
Compatible with lifts without a front trap door : 1200 W,  
1000/1200 PL/HL/P/H  
Double safety mechanism : (hydraulic jack and mechanical)  
Max. opening : 310 mm

Available colorways : GREY BLACK

Ref. 801593  
Ref. 801593Y



Wedge for use with thinner wheels

Wide wheel


Note : MOTOFIXE wheel clamps are customizable with the addition of a sticker : Ref. PAINT03 (available colors: RED ORANGE GREEN BLUE GREY)

LATERAL STAND SUPPORT

Widens the side of the motorcycle lift  
Compatible with PL, P, HL, H & W lifts

Note : Adjustments might be required  
depending on version, please contact us

Ref. 801561

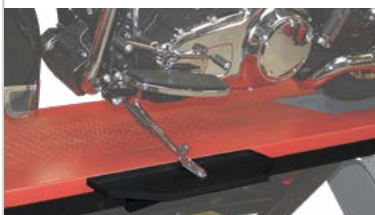

COMPATIBLE WITH



COMPATIBLE WITH



PLATFORM EXTENSION KIT

To lengthen the lift's platform  
Suited for Choppers and Show bikes

Ref. 801563



\* Wheel clamp (MotoFixe) sold separately

MINI-LIFTS

Mini manual or pneumatic lift  
Can be used on its own or on top of a full scale motorcycle lift  
Adjustable height  
Built durably for professional use

Support plates and wedge sold separately :  
Wedge + support plates for pneumatic model : Ref. 801503  
Support plates for manual model : ref. 801505




PNEUMATIC MODEL (Ref. 801502)



PNEUMATIC MODEL (Ref. 801502)  
+ WEDGE (Ref. 801503)



MANUAL MODEL (Ref. 801504)  
+ SUPPORT PLATES (Ref. 801505)

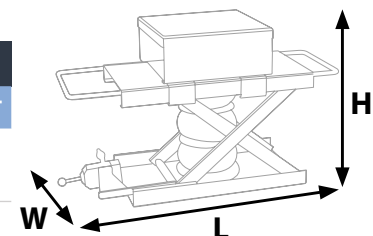

PRODUCT SPECIFICATIONS

MODEL	REF.	H MAX	H MIN	L	I	CAPACITY	PWR. SUPPLY	WEIGHT
MANUAL	801504	330 mm	120 mm	505 mm	160 mm	300 kg	Manual	18 kg
PNEUMATIC	801502	270 mm	110 mm	450 mm	230 mm	400 kg	Pneumatic 8 Bar	20 kg

ADDICRANE

POWER SUPPLY




CAPACITY



Can be used alone or on top of a motorcycle lift

Capacity : 250 kg


Hoist equipped with automatic brakes

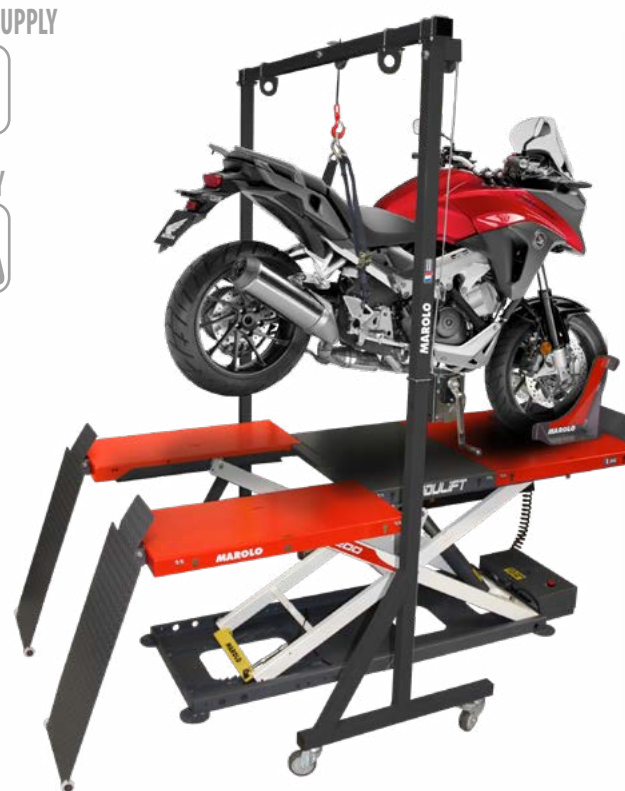

Available colorways : GREY BLACK

PRODUCT SPECIFICATIONS

REF.	TOTAL H	USABLE H	TOTAL L	USABLE L	CAPACITY	WEIGHT	COLOR
801427	2480 mm	2200 mm	1700 mm	1550 mm	250 kg	60 kg	Grey
801427Y							Black






ADDILIFT

CAPACITY



Additional crane secured to the lift. Doesn't require any additional power to lift a motorbike.  
Slides on a rail along the lift's platform  
Capacity : 250 kg  
Pivoting arm  
Compatible with lift models : (P, PL, H, HL since 2001)

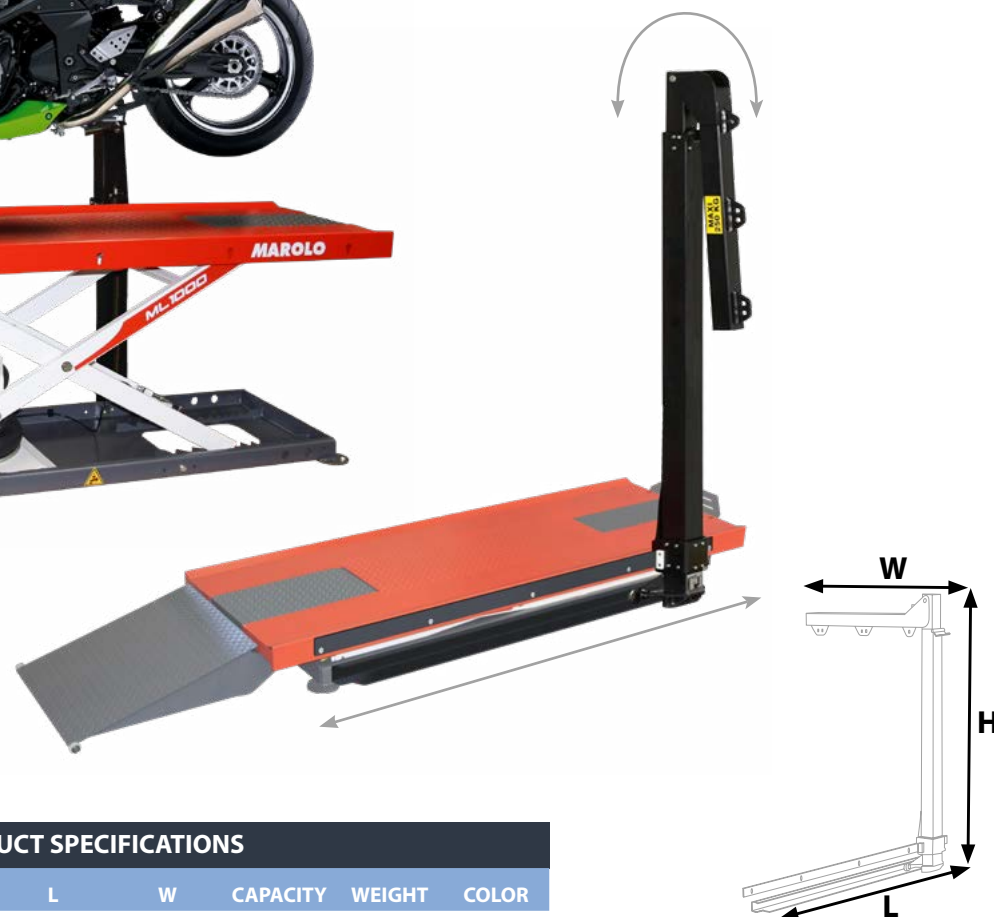


PRODUCT SPECIFICATIONS

REF.	MAX H	MIN H	L	W	CAPACITY	WEIGHT	COLOR
801530	2685 mm	1760 mm	1840 mm	850 mm	250 kg	45 kg	Black

EASILY REMOVABLE

LIFTING FROM THE BACK

LIFTING FROM THE FRONT

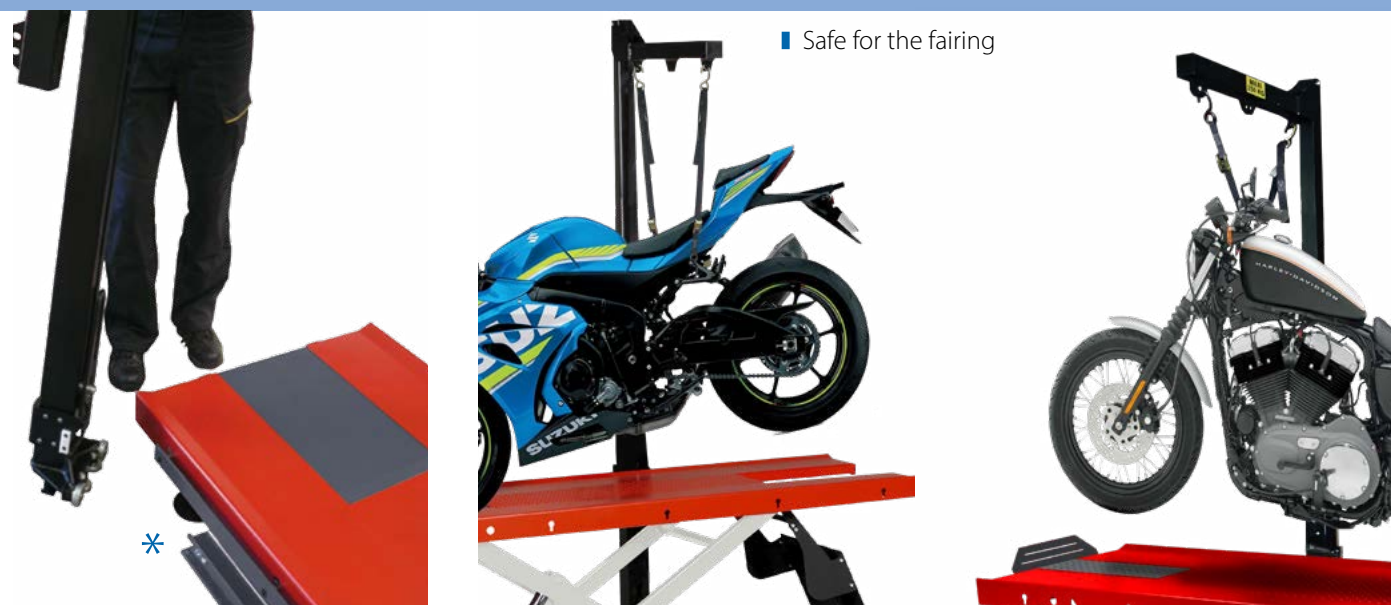

■ Safe for the fairing

\* A single crane can be used on several lifts if the latter are equipped with a railing (ref. 801533)

SINGLE ARM REAR STAND

Weight : 7,7 kg  
Supplied with 3 axles : DUCATI, HONDA, TRIUMPH  
Colour may differ


Ref. 800532



REAR STAND

Adjustable in width from 220 and up to 355 mm  
Mounted on 4 wheels for better stability  
Weight : 4,9 kg  
Supplied with 2 Vs 1 And 2 support rubbers 2

Ref. 800531



UNDER FORK FRONT STAND

Adjustable in width from 160 and up to 240 mm  
Composite supports 1  
Colour may differ

Note : The front stand requires the simultaneous use of a rear stand

Ref. 800535



Vs FOR BIKE STANDS

Sold by pairs  
Ref. 800558



SLIDER SPOOLS

Sold by pairs

3 sizes available :  
M6 : Ref. 601212  
M8 : Ref. 601213  
M10 : Ref. 601214



PROFESSIONAL RAMP

- > High quality aluminium
- > Robust, lightweight, and easy to carry
- > Equipped with a safety strap to secure the ramp when loading or during transit


Sold by the unit  
Length : 2200 mm (Folded : 1450 mm)  
Width : 290 mm  
Capacity (per ramp) : 300 kg (600 kg per pair)  
Weight : 9 kg  
Ref.800578



CLEARANCE



SUMMARY

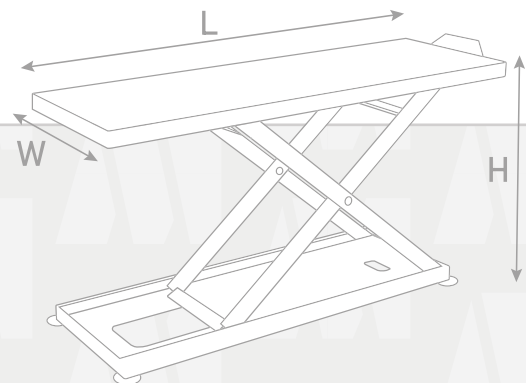

CHOOSING THE RIGHT LIFT FOR YOUR WORKSHOP*									
MODEL	SCOOTER	HEAVY SCOOTER	3-WHEELED SCOOTER	BIKE	HEAVY BIKE	E-BIKE	TRIKE	ATV	SSV
1000PCL - 1000HCL	●	○	◐	○	×	×	×	×	×
1000PL - 1000HL	●	●	◐	●	×	×	×	×	×
1200PL - 1200HL	●	●	◐	●	○	×	×	×	×
1000P - 1000H	●	●	●	●	○	×	×	×	×
1200P - 1200H	●	●	●	●	●	×	×	×	×
1000WL	●	●	●	●	×	×	×	×	×
1200W	●	●	●	●	●	×	×	×	×
1200WA	●	●	×	●	●	×	×	●	×
1200WT	●	●	●	●	●	×	●	×	×
1200MOP - 1200MOH	○	○	○	○	○	×	×	●	×
1200MOPXL - 1200MOHXL	○	○	○	○	○	×	◐	●	×
1400MOH	○	○	○	○	○	×	◐	●	○
1400MOHXL	○	○	○	○	○	×	◐	●	●
1200ZL	○	○	○	○	×	●	×	×	×

MOTORCYCLE LIFT ACCESSORIES													
MODEL	MOTOFIXE RANGE								ADDILIFT Ref. 801530	ADDICRANE Ref. 801427	PLATFORM EXTENSION KIT Ref. 801563	LATERAL STAND SUPPORT Ref. 801561	PNEUMATIC MINI-LIFT Ref. 801454
	MOTOFIXE Ref. 801430	AUTOMATIC MOTOFIXE Ref. 801590	MOTOFIXE NG Ref. 801431	AUTOMATIC MOTOFIXE NG Ref. 801591	MODULIFT MOTOFIXE Ref. 801435	AUTOMATIC MODULIFT MOTOFIXE Ref. 801592	MOTOFIXE XL Ref. 801593	E-MOTOFIXE Ref. 807400					
1000PCL-1000HCL	●	●	✕	✕	✕	✕	✕	✕	✕	●	✕	✕	●
1200PL-1200HL	●	●	✕	✕	✕	✕	●	✕	●	●	●	●	●
1200P-1200H	◐	◐	●	●	✕	✕	●	✕	●	●	●	●	●
1200W	●	●	●	●	✕	✕	●	✕	✕	●	●	●	●
1200MOP-1200MOH	✕	✕	✕	✕	●	●	✕	✕	✕	●	✕	✕	●
1200MOPXL-1200MOHXL	✕	✕	✕	✕	●	●	✕	✕	✕	●	✕	✕	●
1400MOH	✕	✕	✕	✕	●	●	✕	✕	✕	●	✕	✕	●
1400MOHXL	✕	✕	✕	✕	●	●	✕	✕	✕	✕	✕	✕	●
1200ZL	✕	✕	✕	✕	✕	✕	✕	●	✕	✕	✕	✕	✕

✕ Non-compatible    ○ Admissible\*\*    ◐ Compatible with options    ● Compatible\*


\* ATTENTION : This table cannot cover all vehicles currently available on the market. Please compare the vehicle's specifications to those of the lift or contact us to assess compatibility.  
\*\* Subject to limitations. Consult us to assess compatibility.

SUMMARY

MOTORCYCLE LIFT SPECIFICATIONS											
MODEL	REFERENCE	H	L	W	CAPACITY	SAFETY SYSTEM	CONTROLS	POWER SUPPLY			
MAROLOWLIFT - Flat lifts											
1200 W	804400	1200 mm	2300 mm	750 mm	600 kg	Double jack + buzzer	Side console	Electric - 230V - 50Hz + Pneumatic - 8 bar			
1200 WE	804403						Integrated into furniture				
1200 WI	804402						1100 mm	Electric - 230V - 50Hz			
1200 WEI	804404										
1200 WR	804460			Side console							
1200 WA	804450			Integrated into furniture							
1200 WAE	804453			Side console							
1200 WAI	804452			Integrated into furniture							
1200 WAEI	804454		2550 mm	1600 mm			Side console				
1200 WT	804455						Integrated into furniture				
1200 WTE	804457										
1200 WTI	804456										
1200 WTEI	804458										
MAROLOLIFT - Pneumatic lifts											
1000 PCL	804000	1000 mm	2000 mm	660 mm	400 kg	Manual	Pedal board	Pneumatic - 8 Bar			
1000 PL	804010				1200 mm				750 mm	600 kg	
1200 PL	804040	1000 mm	2200 mm	400 kg		Auto + buzzer	Wall panel	Electric - 230V - 50Hz + Pneumatic - 8 bar			
1200 PLE	804041				1200 mm	600 kg	Automatic	Pedal board	Pneumatic - 8 Bar		
1000 P	804020	1200 mm	600 kg	Auto + buzzer			Wall panel	Electric - 230V - 50Hz + Pneumatic - 8 bar			
1200 P	804050										
1200 PE	804051										
MAROLOLIFT - Hydraulic lifts											
1001 HCL	804070	1000 mm	2000 mm	660 mm	500 kg	Manual	Remote controller	Foot pump			
1000 HCL	804072							Electric - 230V - 50Hz			
1001 HL	804080		2200 mm	750 mm				600 kg	Auto + buzzer	Wall panel	Foot pump
1000 HL	804082										Electric - 230V - 50Hz
1200 HL	804112	1200 mm	2200 mm	750 mm	500 kg	Automatic	Remote controller	Electric - 230V - 50Hz + Pneumatic - 8 bar			
1200 HLE	804113								1000 mm	600 kg	Auto + buzzer
1000 H	804092	1200 mm			600 kg	Auto + buzzer	Wall panel				
1200 H	804122										
1200 HE	804123										
MODULIFT - Modular lifts											
1200 MOP	801534	1200 mm	2300 mm	800↔1300 mm	600 kg	Automatic	Pedal board	Pneumatic - 8 Bar			
1200 MOPE	801536					Auto + buzzer	Wall panel				
1200 MOP XL	801556		2500 mm	900↔1500 mm		Automatic	Pedal board				
1200 MOPE XL	801558					Auto + buzzer	Wall panel		Electric - 230V - 50Hz + Pneumatic - 8 bar		
1000 MOH	801539	1000 mm	2300 mm	800↔1300 mm	500 kg	Manual	Remote controller	Electric - 230V - 50Hz			
1200 MOH	801535				1200 mm	600 kg			Automatic		
1200 MOHE	801537	2500 mm	900↔1500 mm	1200 kg			Auto + buzzer	Wall panel	Electric - 230V - 50Hz + Pneumatic - 8 bar		
1200 MOH XL	801555				Automatic	Remote controller					
1200 MOHE XL	801559	Auto + buzzer	Wall panel								
1400 MOH	801532	1400 mm	2800 mm	1100↔1700 mm	800 kg	Automatic	Remote controller				
1400 MOHE	801547					Auto + buzzer	Wall panel				
1400 MOH XL	801542					Automatic	Remote controller				
1400 MOHE XL	801543					Auto + buzzer	Wall panel				
E-lift motorcycle lift											
1200 ZL	807100	1200 mm	2300 mm	750 mm	400 kg	Automatic	Pedal board	Pneumatic - 8 Bar			
1200 ZLE	807101					Auto + buzzer	Wall panel	Electric - 230V - 50Hz + Pneumatic - 8 bar			

**MAROLO*****TYRE***

***TYRE MAINTENANCE***

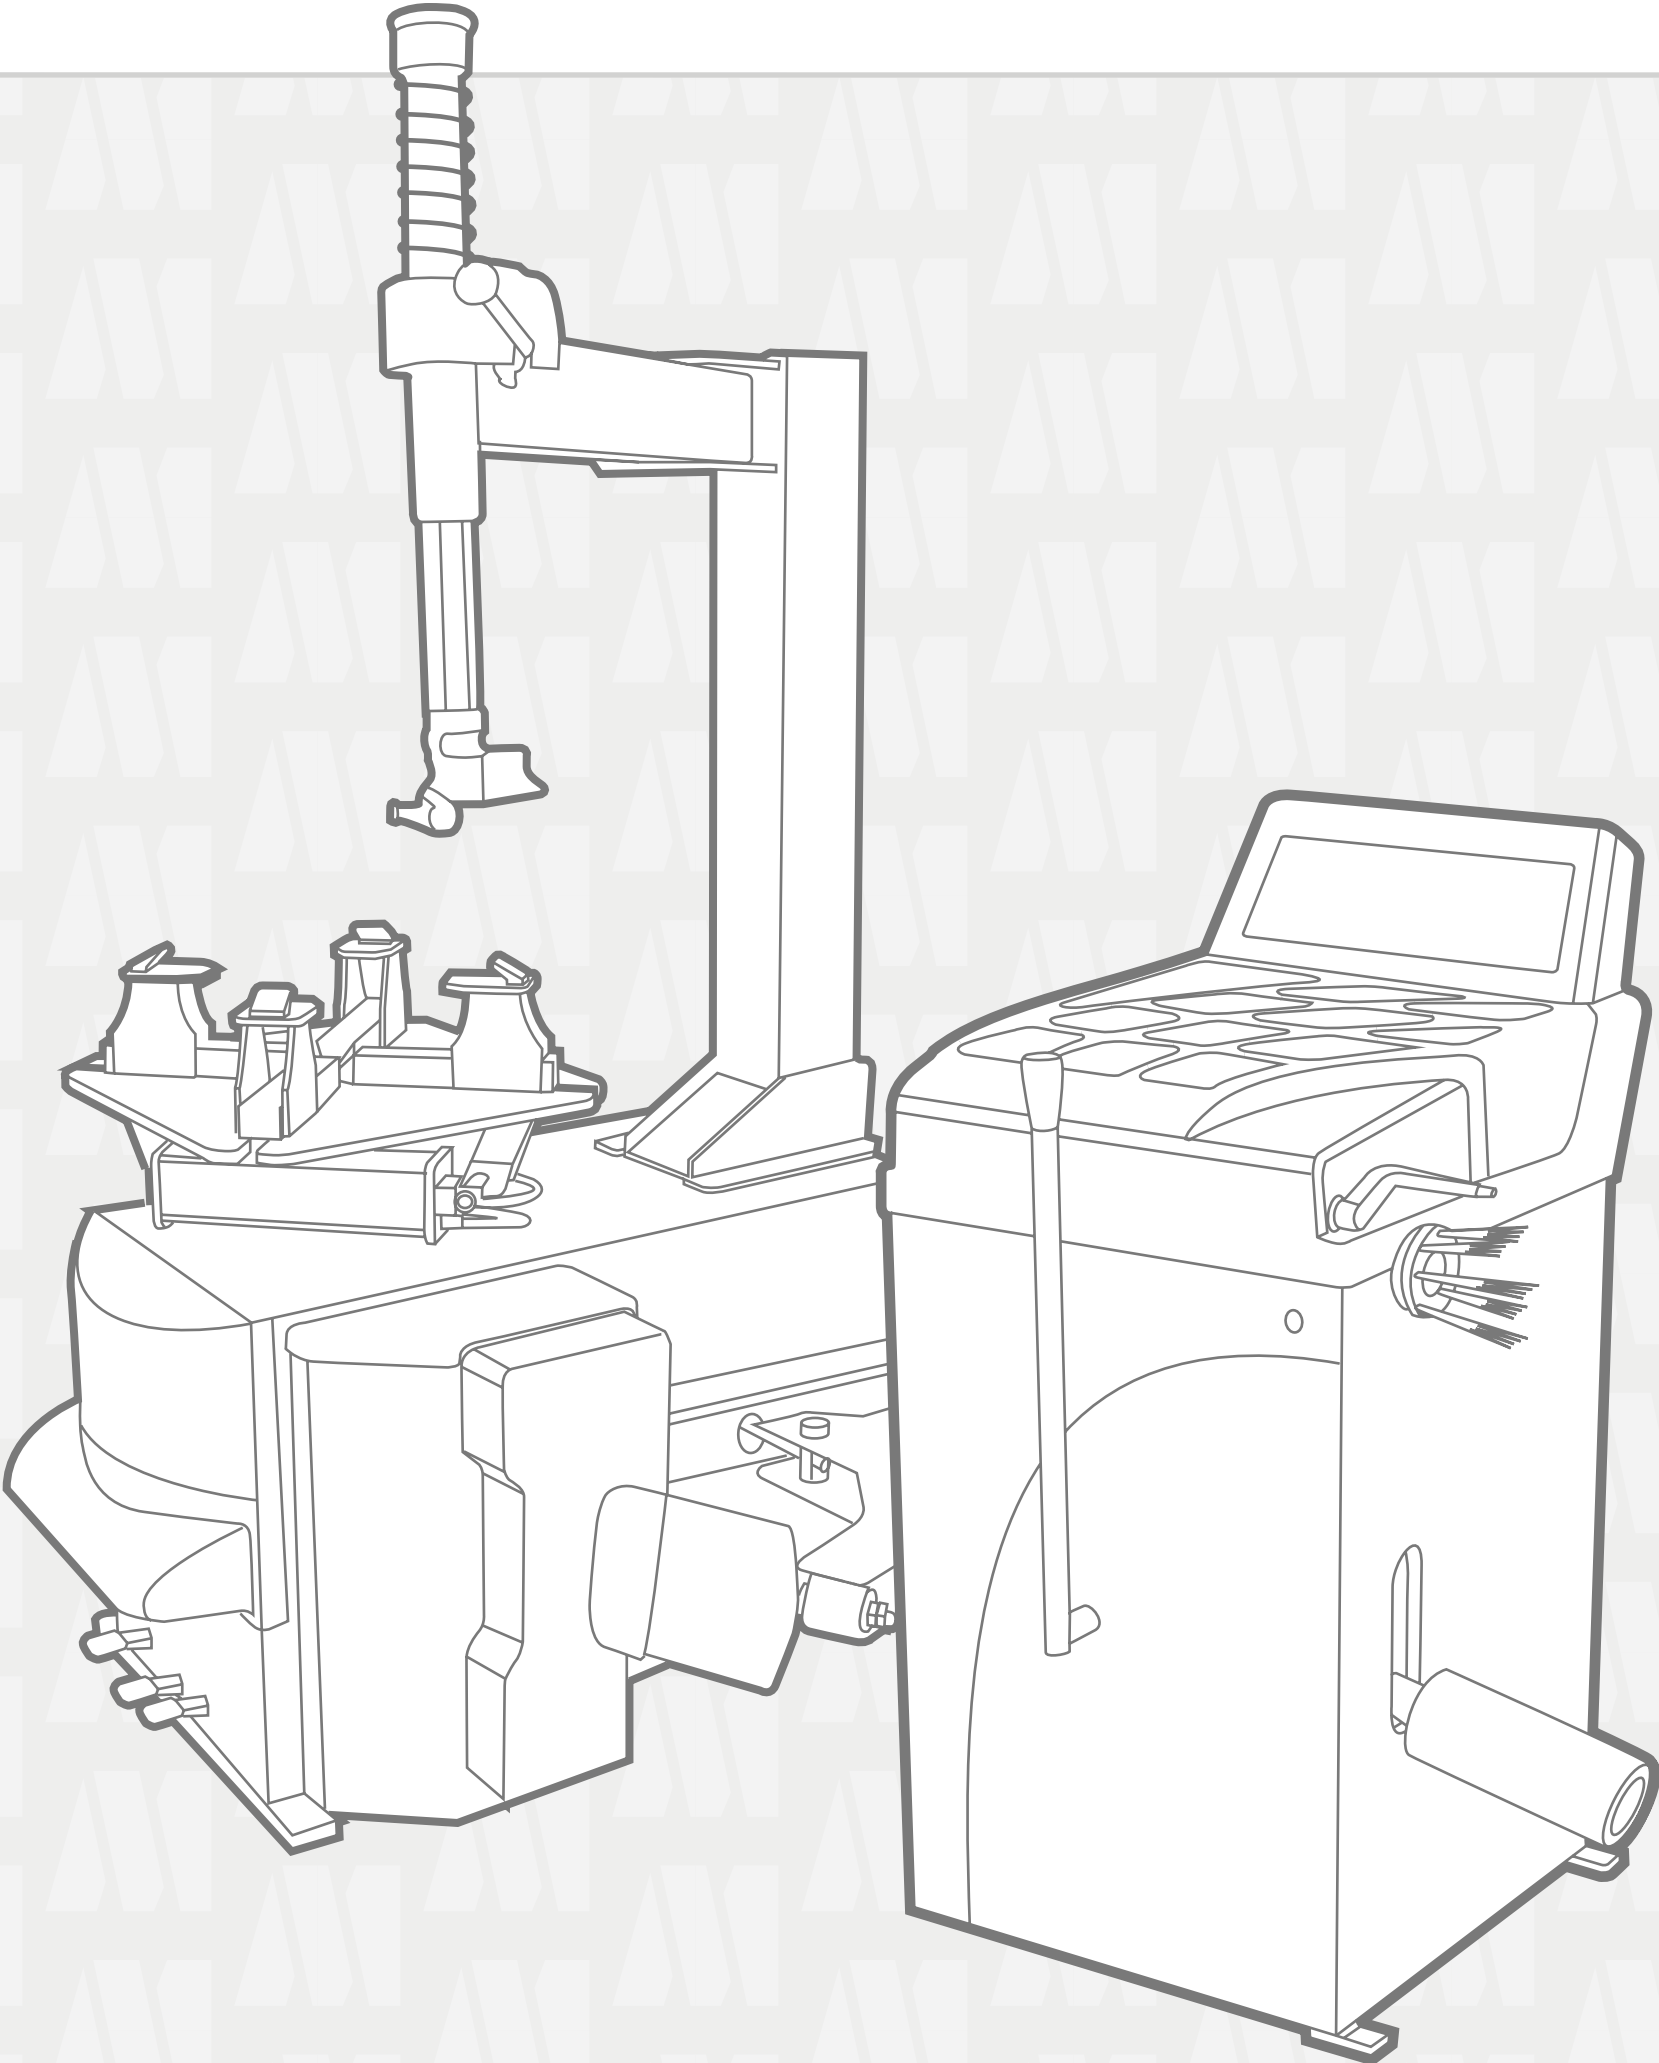



MT 216 - TYRE CHANGER

COMPATIBLE WITH



POWER SUPPLY




Heavy-duty design for professional use  
Designed especially for bike, trike and ATV wheels  
Compatible with rims from 5" and up to 23"  
Reinforced chassis, mast, and arm to protect the rims

- 1 Reinforced hexagonal axle, Ø 36 mm
- 2 Reinforced arm 100 mm x 60 mm
- 3 Reinforced mast, 120 mm x 120 mm, with 4 attachment points
- 4 Powerful bead breaker shovel (2 tons), with protective plastic casing

Supplied with : inflation gun, air filter, grease, tyre lever, 10" to 21" steel tool

- > Fully assembled and preset
- > Reinforced to protect rims
- > For moderate use
- > Assembled and tested by **MAROLO** in Cholet (49), FRANCE

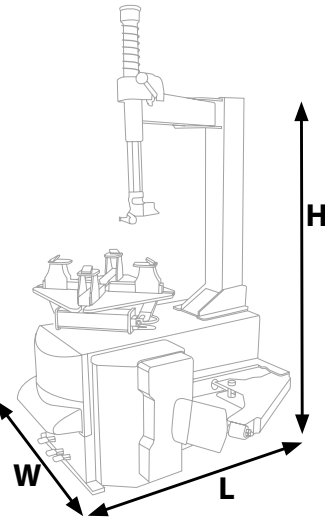

Sticker color is customizable : Ref. PAINT03 (available colors : RED ORANGE GREEN BLUE GREY )

CE COMPLIANT

Tool used	Distance between the bottom of the tool and the top of the jaws (mm)
Ref. 801162 (alone)	365
Ref. 801158 (alone)	360
Ref. 801167 (alone)	322
Ref. 801176 (alone)	370
Ref. 801162 (+1/4 turn)	290
Ref. 801158 (+1/4 turn)	285
Ref. 801167 (+1/4 turn)	255
Ref. 801176 (+1/4 turn)	270

PRODUCT SPECIFICATIONS

MODEL	REFERENCE	H	L	W	AIR SUPPLY	ELECTRIC SUPPLY	WEIGHT
MT 216 M	801145	1750 mm	1200mm	1000 mm	8 to 10 Bar	Single-phase 230V - 50Hz - 0.75 KW - 7.6 A	155 kg

MT 226 - TYRE CHANGER

COMPATIBLE WITH



POWER SUPPLY



Heavy duty design for intensive use  
Designed especially for bike, trike and ATV wheels  
Compatible with rims from 5" and up to 23"  
Reinforced chassis, mast, and arm to protect the rims

- 1 Reinforced hexagonal axle, Ø 40 mm
- 2 Reinforced arm 100 mm x 60 mm
- 3 Reinforced mast, 120 mm x 120 mm, with 6 attachment points
- 4 Powerful bead breaker shovel (2 tons), with protective plastic casing

Supplied with : inflation gun, air filter, grease, tyre lever, 10" to 21" steel tool

- > Fully assembled and preset
- > Reinforced to protect rims
- > For intensive use
- > Assembled and tested by **MAROLO** in Cholet (49), FRANCE



CE COMPLIANT

Tool used	Distance between the bottom of the tool and the top of the jaws (mm)
Ref. 801162 (alone)	365
Ref. 801158 (alone)	360
Ref. 801167 (alone)	322
Ref. 801176 (alone)	370
Ref. 801162 (+1/4 turn)	290
Ref. 801158 (+1/4 turn)	285
Ref. 801167 (+1/4 turn)	255
Ref. 801176 (+1/4 turn)	270

PRODUCT SPECIFICATIONS

MODEL	REFERENCE	H	L	W	AIR SUPPLY	ELECTRIC SUPPLY	WEIGHT
MT 226 M	801147	1750 mm	1200mm	1000 mm	8 to 10 Bar	Single-phase 230V - 50Hz - 0.75 KW - 7.6 A*	175 kg

Sticker color is customizable : Ref. PAINT03 (available colors : RED ORANGE GREEN BLUE GREY )  
\*Three-phase 400V model (50 Hz - 0.55 KW - 1,65 A) available on demand with a 2 months delay (Ref. 801164)

TYRE CHANGERS TYRE CHANGER OPTIONS

MT 316 - AUTOMATIC TYRE CHANGER


COMPATIBLE WITH



POWER SUPPLY



- > Fully assembled and preset
- > Reinforced to protect rims
- > For intensive use
- > Assembled and tested by **MAROLO** in Cholet, FRANCE

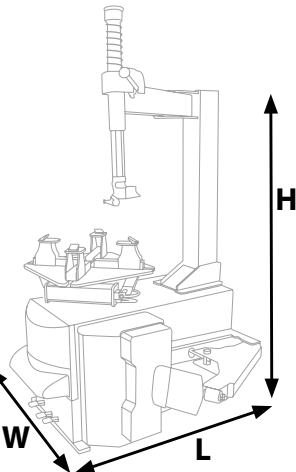

CE COMPLIANT

Tool used	Distance between the bottom of the tool and the top of the jaws (mm)
Ref. 801162 (alone)	335
Ref. 801158 (alone)	330
Ref. 801167 (alone)	292
Ref. 801176 (alone)	340
Ref. 801162 (+ 1/4 turn)	260
Ref. 801158 (+ 1/4 turn)	255
Ref. 801167 (+ 1/4 turn)	225
Ref. 801176 (+ 1/4 turn)	240

- Heavy duty design for intensive use  
Designed especially for bike, trike and ATV wheels  
Compatible with rims from 5" and up to 23"  
Reinforced chassis, mast, and arm to protect the rims
- 1 Reinforced hexagonal axle, Ø 40 mm
  - 2 Sliding, reinforced arm
  - 3 Pivoting, reinforced mast, 120 mm x 120 mm, with 6 attachment points
  - 4 Powerful bead breaker shovel (2 tons) with protective plastic casing

Supplied with : inflation gun, air filter, grease, tyre lever, 10" to 21" steel tool



\*With the mast up → With the mast fully lowered  
\*\*Three-phase 400V model (50 Hz - 0,55 KW - 1,65 A) available on-demand with a 2 months delay (Ref. 801149)  
Sticker color is customizable : Ref. PAINT03 (available colors : RED GREEN BLUE GREY)

PRODUCT SPECIFICATIONS							
MODEL	REFERENCE	H	L	W	AIR SUPPLY	ELECTRIC SUPPLY	WEIGHT
MT 316 M	801187	1910 mm	1200 → 1820 mm *	1170 mm	8 to 10 Bar	Single-phase 230V - 50Hz - 0.75 KW - 7.6 A**	175 kg

PNEUMATIC ARM



- 1 Automatic up/down control
- 2 Multiposition support wedge
- 3 Mounting / dismounting disk

Ref. 801110

PNEUMATIC WHEEL POSITIONER



Suited for MT 226 and MT 316 models  
Positions the wheel at table level

- 1 Pedal-operated

Ref. 801111

TUBELESS TYRE INFLATOR

- 1 Inflation gun
- 2 Air tank secured to the tyre changer
- 3 Inflation gun holder

Ref. 801106



INFLATION PEDAL

Frees up both hands for easier wheel handling












- 1 Manometer

Ref. 801109





MANUAL WHEEL BALANCER

TYRE CHANGER TOOLS					
	Designation	Steel			Plastic
Tools	Tool only	 From 5" Ref. 801176	 From 6" to 12" Ref. 801162	 From 10" to 21" Ref. 801158	 From 10" to 23" Ref. 801167
Fixation system	Hexagonal fixation system - only	 Required to secure the tool Ref. 801179	The tool can be secured directly to the tyre changer without any additional attachment		
	1/4 turn fixation system - only	 Ref. 801178			 Ref. 801171
Kits	Complete 1/4 turn system	 Ref. 801166 Comprised of: - 1/4 turn system, to be secured to the hexagonal socket of the tyre changer - 1/4 turn fixation system			
	Quick change 1/4 turn system +tool	 Ref. 801129	 Ref. 801125		 Ref. 801127

For more info. : [www.marolotest.com](http://www.marolotest.com)

TYRE CHANGER ACCESSORIES

HIGH JAWS

Recommended for tubeless wheels with outer spokes  
Height : 155 mm (versus 105 mm for standard jaws)  
Supplied with a set of plastic jaw protectors and a set of plastic wedges

Ref. 801184

PLASTIC PROTECTIONS

- 1 Set of 4 plastic jaw protectors - Ref. 801152
- 2 Set of 8 plastic wedges - Ref. 801153
- 3 Set of 10 plastic wedges for steel tools - Ref. 801157
- 4 Plastic casing for bead breaker shovel - Ref. 801164



Entirely dismountable wheel balancer  
Large, bevelled edge rollers, mounted on bearings for smoother wheel rotation  
Reduced friction  
Supplied with a Ø12 mm axle (Ref. 802339) + cones

Ref. 800605

AVAILABLE OPTIONS


SINGLE-ARM KIT

TRIUMPH-, DUCATI-, HONDA-compatible  
Ref. 800608



BMW SINGLE-ARM KIT

BMW-compatible  
Ref. 800607



BMW K1200 KIT

Ref. 800625



PIAGGIO X9 KIT

PIAGGIO X9-compatible  
Ref. 800604



SINGLE ARM KIT Ø68/85 CONE

Ref. 802340



Ø10 mm AXLE

Ref. 700525



ELECTRONIC WHEEL BALANCERS

MT 22 M - WHEEL BALANCER

COMPATIBLE WITH




POWER SUPPLY



- > Designed especially for scooter, motorcycle and ATV wheels
- > Sound signal indicates the exact positioning for the weight
- > Easy to use
- > Assembled and tested by **MAROLO** in Cholet, FRANCE

Heavy-duty design for intensive use  
High precision static and dynamic balancing (+/- 1 grams) ≤ 4 seconds  
Takes bearing wear into account  
Manual start

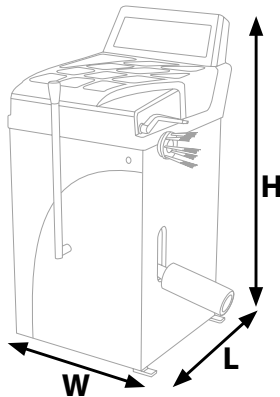

CE COMPLIANT Sticker color is customizable : Ref. PAINT03 (available colors: RED ORANGE GREEN BLUE GREY)

PRODUCT SPECIFICATIONS									
MODEL	REFERENCE	H	L	W	RIM DIAMETER	RIM WIDTH	POWER SUPPLY	AUTOMATIC STARTER	WEIGHT
MT 22	802305	1010	820	670	From 10" to 24"	From 15" to 10"	Single-phase 230 V 50 Hz - 1.8 KW - 0.18 A	Yes	60 kg
MT 22 M	802306	mm	mm	mm				No, manual	

WHEEL BALANCER OPTIONS

**SINGLE-ARM KIT**  
Ref. 802302



**ATV KIT**  
Ref. 802309  
Note : The ATV kit requires the use of the single-arm kit (Ref. 802302)



**TRIGLIDE KIT**  
Ref. 802303



ELECTRONIC WHEEL BALANCERS

MT 22 - WHEEL BALANCER

COMPATIBLE WITH



POWER SUPPLY



- > Designed especially for scooter, motorcycle and ATV wheels
- > Sound signal indicates the exact positioning for the weight
- > Easy to use
- > Assembled and tested by **MAROLO** in Cholet, FRANCE

Heavy-duty design for intensive use  
High precision static and dynamic balancing (+/- 1 grams) ≤ 4 seconds  
Takes bearing wear into account  
Automatic starter  
Automatically calculates the rim dimensions ; the user only indicates width



MT 22 WITH STANDARD ROD



Sticker color is customizable : Ref. PAINT03 (available colors: RED ORANGE GREEN BLUE GREY)



MT 22 WITH TRIGLIDGE KIT

ACCESSORIES

- Ø11 ROD, 200mm + CONES AND SPACERS**  
Ref. 802300
- Ø14 ROD, 250mm + CONES**  
Ref. 802319
- Ø18 ROD, 350 mm + CONES AND SPACERS**  
Ref. 802328



**WEIGHT BARS (50g per bar)**  
Sold per 50 pcs  
Silver:  
Ref. 400340  
Black:  
Ref. 400380





**MORE TYRE MAINTENANCE ACCESSORIES**  
→ See page 121 ←



# SMART RANGE

## WORKSHOP FURNITURE

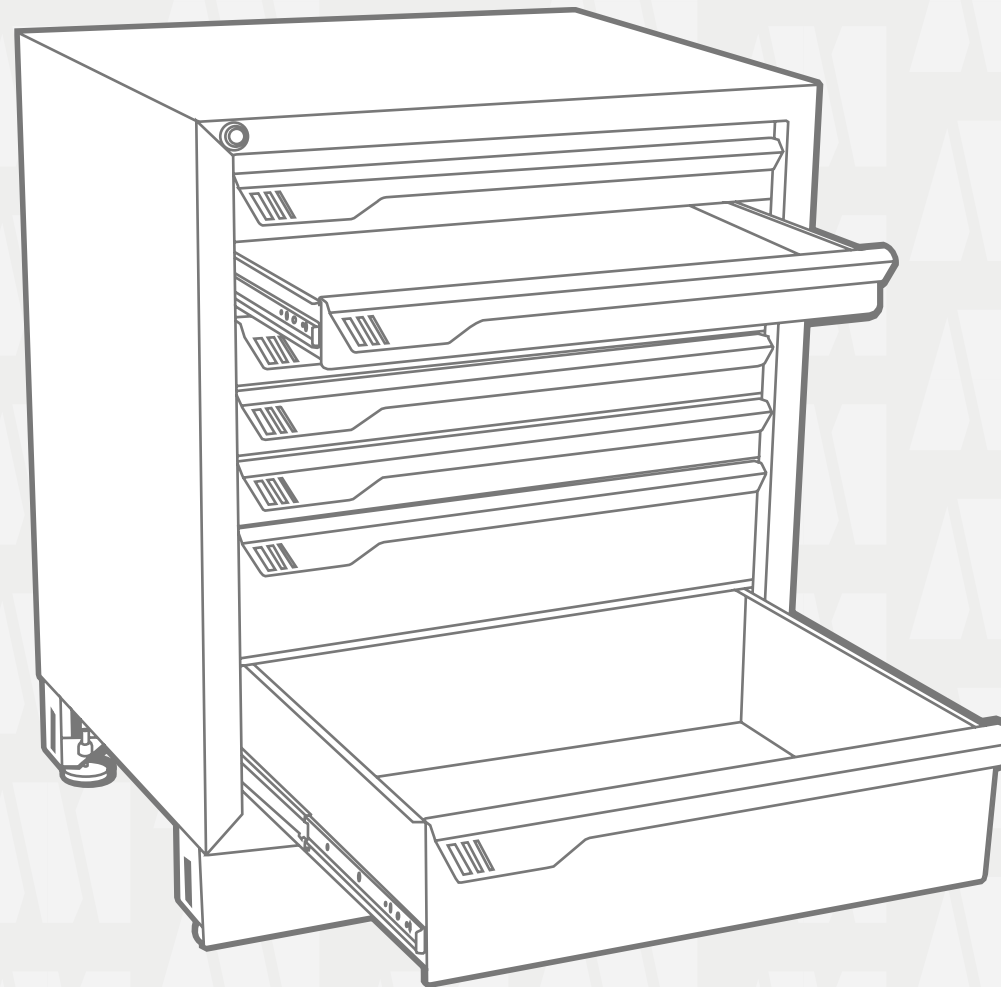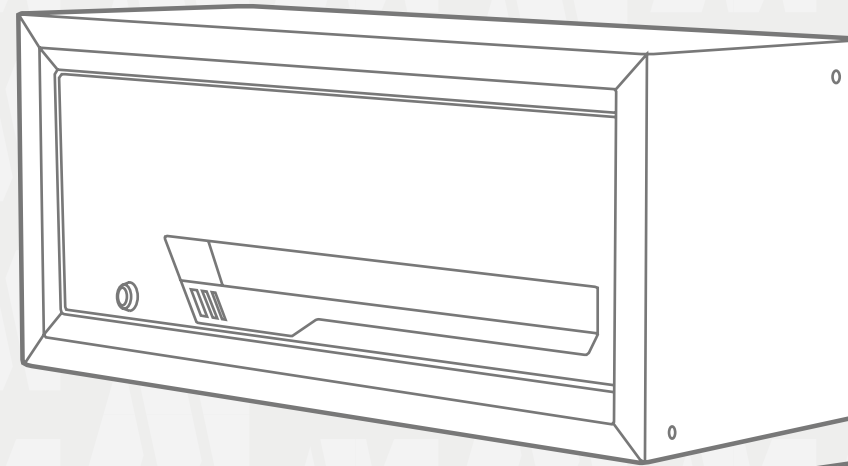

NEW



# THE SMART RANGE WORKSHOP FURNITURE

Sleek furniture design made to meet the high standards of professionals. The SMART range is built durably and designed for optimal workplace efficiency. The individual elements fit together to create a coherent workstation, that suits your needs in spite of spacial constraints. Several storage options make organization easier, and allow the inconspicuous integration of your technical elements : Lift control panels, hydraulic pumps, electrical networks... This results in an ergonomic and clutter-free space, to perform without distractions.

Designed and made in France.




Raphaël GIRARD  
General manager




MOBILIER SMART



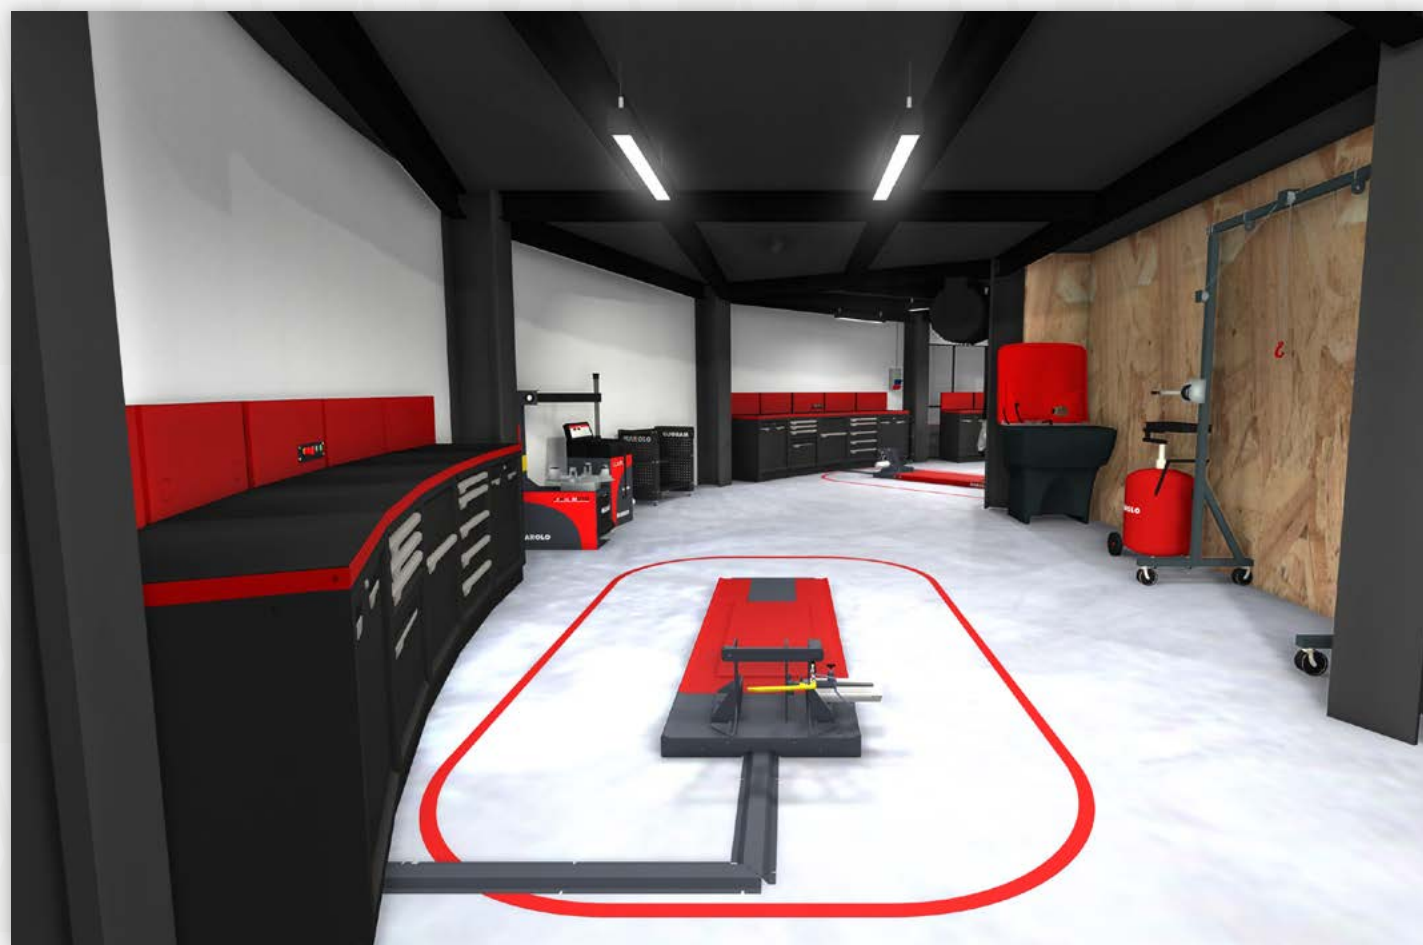



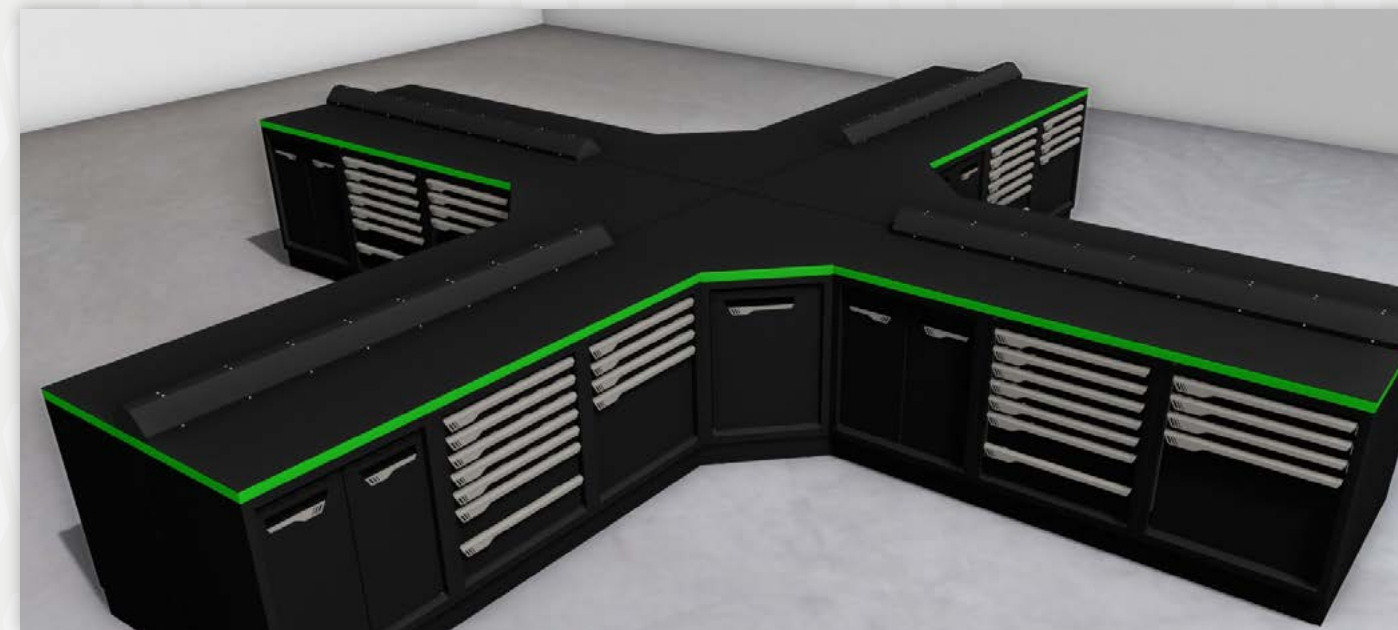



2 doors cabinet



3 to 9 drawers cabinet



5 or 7 drawers cabinet



1 to 3 drawers and 1 door cabinet



Recycling cabinet



3 shelves trolley



Corner cabinet



Wooden or steel worktop



Tall cabinet



Energy supply tall cabinet



Tall sliding door cabinet




High cabinet



Modular workbench feet



Configuration example :  
1 workbench foot + 1 low cabinet + 1 worktop

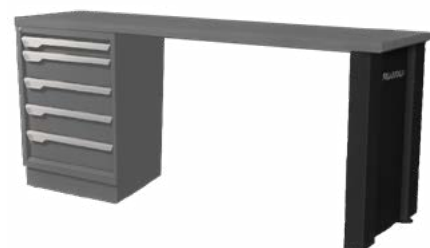

Configuration example :  
2 workbench feet + 1 steel shelf + 1 worktop



Plain panel




Plain panel with electrical outlet cut-outs




Plain panel with control panel cut-out



Perforated tool storage panel

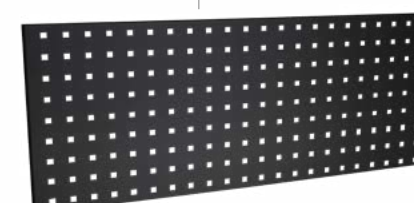

Perforated tool storage panel with outlet cut-outs

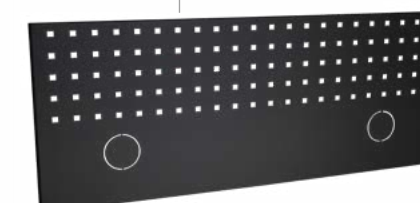

Perforated tool storage panel with control panel cut-out



When equipped with electrical equipment, the whole set of furniture should be grounded.


## CUSTOMIZATION OPTIONS

Make our products your own by customizing drawer handles, tool panels, tabletops... Several color options are available.



## WORKING BY YOUR SIDE


For your more ambitious projects, we use 3D-modelling software to engineer your workshop and bring your ideas to life, ensuring confidence every step of the way.

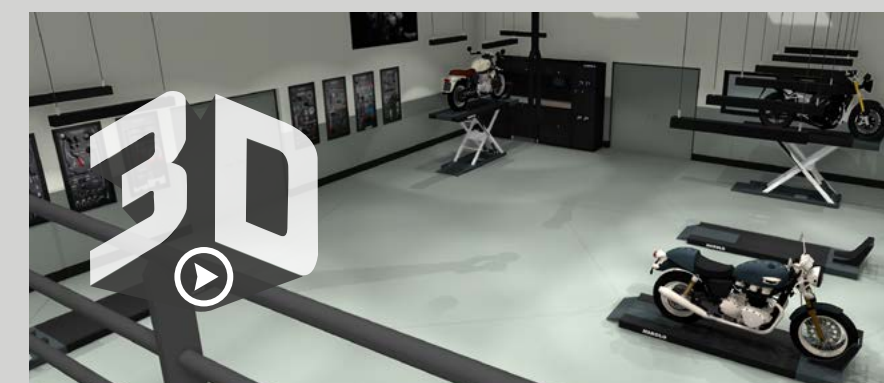

To learn about the complete range of *SMART* furniture and our customization options, ask for our dedicated catalog or visit us at [www.marolotest.com](http://www.marolotest.com)

# MAROLOKIT

**GENERAL WORKSHOP EQUIPMENT**

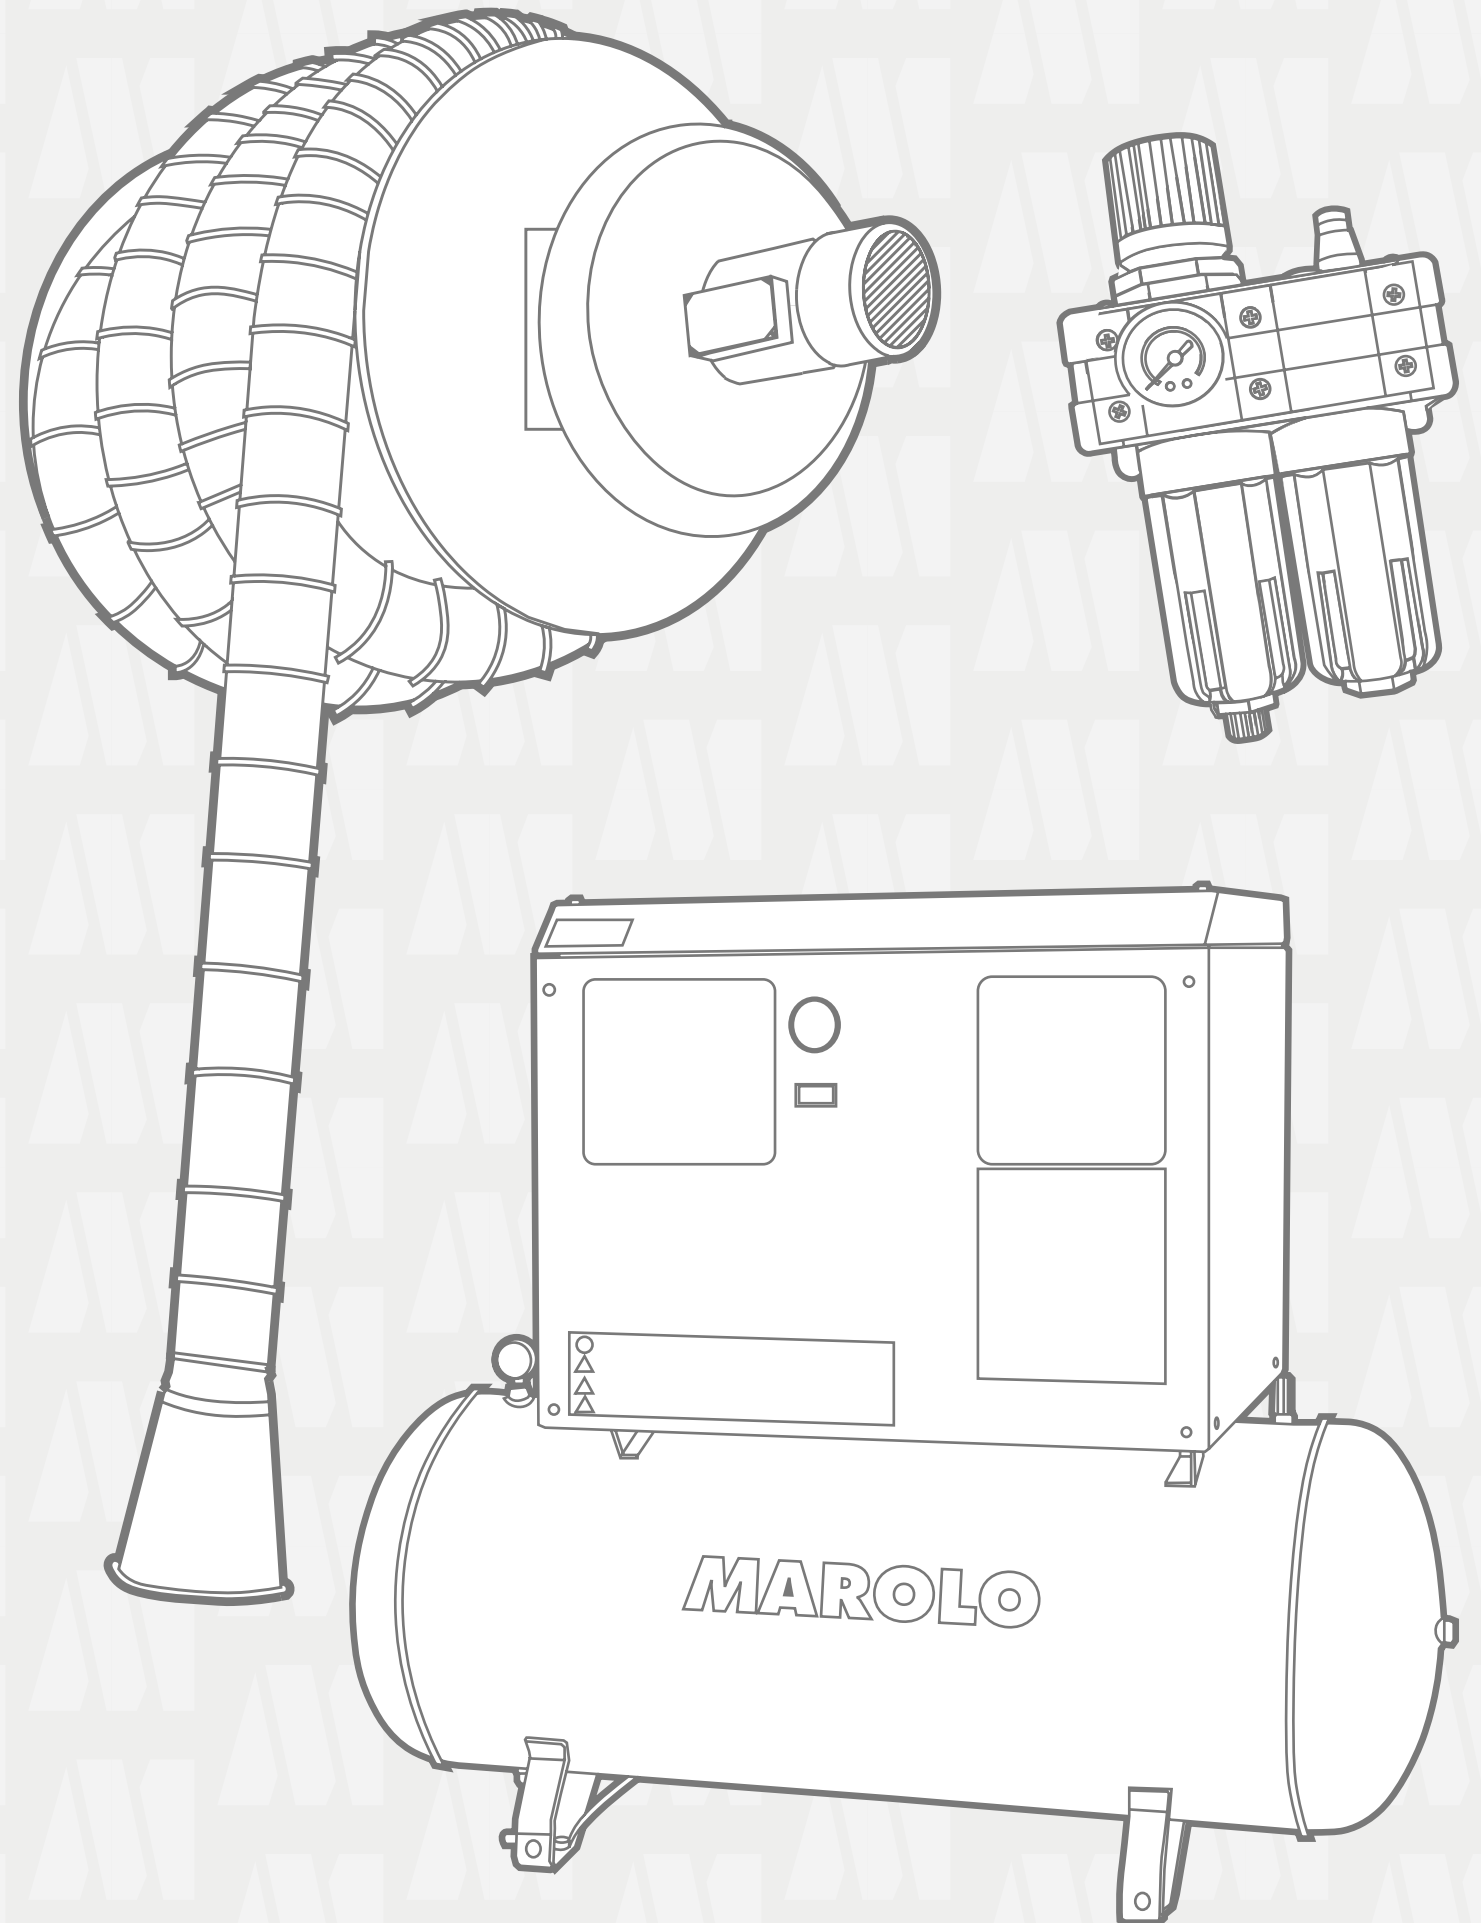



## COMPRESSORS FILTRATION AND PIPE FITTINGS

## CAST IRON AIR COMPRESSORS

200L Single-phase  
Ref. 801886270L Three-phase  
Ref. 801881500L Three-phase  
Ref. 801815

## PRODUCT SPECIFICATIONS

MODEL	REFERENCE	CAPACITY	PRESSURE	RPM	ENERGY CONSUMPTION	PWR.	POWER SUPPLY	DIMENSIONS	WEIGHT
100L Mono	801809	15 m³/h	10 Bar	1450	1,5 Kw/h	2 hp	1-phase 230V - 50Hz - 1.5KW - 9.5A	1150 x 420 x 860 mm	65 kg
200L Mono	801886	20 m³/h	10 Bar	1082	2,2 Kw/h	3 hp	1-phase 230V - 50Hz - 2.2KW - 14.6A	1500 x 600 x 1020 mm	107 kg
200L Tri	801880	35 m³/h	10 bar	1400	4 Kw/h	5,5 hp	3-phase 400V - 50 Hz - 5.5KW - 16A	1500 x 600 x 1240 mm	127 Kg
270L Tri	801881	35 m³/h	10 Bar	1390	4 Kw/h	4 hp	3-phase 400V - 50 Hz - 4KW - 12.8/7.7A	1700 x 500 x 1240 mm	159 kg
500L Tri	801815	52 m³/h	10 Bar	1190	4 Kw/h	7,5 hp	3-phase 400V - 50 Hz - 5.5KW - 16A	1950 x 600 x 1400 mm	240 kg

## SOUNDPROOF COMPRESSORS

Electronic protection of engine and electrical components  
Automatic engine starter control  
Ventilation regulation system  
Automatic oil level control  
Cooling radiator  
EPOXY paint



200L Single-phase



270L Three-phase



500L Three-phase

## PRODUCT SPECIFICATIONS

MODEL	REFERENCE	CAPACITY	PRESSURE	RPM	ENERGY CONSUMPTION	PWR.	POWER SUPPLY	DIMENSIONS	WEIGHT
200L Mono	801807	19.8 m³/h	10 Bar	1210	2,2 Kw/h	3 hp	1-phase 230V - 50Hz - 2.2 KW - 16 A	1400 x 592 x 1200 mm	120 kg
270L Tri	801827	23 m³/h	10 Bar	1130	3 Kw/h	5,5 hp	3-phase 400V - 50Hz - 3KW - 13.1/7.6A	1440 x 592 x 1220 mm	215 kg
500L Tri	801806	46,6 m³/h	10 Bar	1090	5,5 Kw/h	7,5 hp	3-phase 400V - 50Hz - 5.5KW - 10A	2000 x 600 x 1330 mm	305 kg

## SINGLE-PHASE SOUNDPROOF COMPRESSOR - 100L



Patented CCS (Controlled Cooling System) allowing intensive use over long periods of time  
Soundproof compressor  
Electronic protection of engine and electrical components

MODEL	REFERENCE	CAPACITY	PRESSURE	RPM	ENERGY CONSUMPTION	PWR.	POWER SUPPLY	DIMENSIONS	WEIGHT
100L Mono	801828	21 m³/h	10 Bar	1500	2,2 Kw/h	3 hp	1-phase 230V - 50Hz - 2.2KW - 16 A	1100 x 400 x 780	65 kg

## REGULATING AND LUBRICATING AIR FILTERS

## ESSENTIAL



1/2" model



1/4" model

0-8 bar air filter  
**Mandatory** to protect your network and pneumatic tooling  
Lubricant not provided

1/2" model  
Recommended for compressors > 200 L  
Ref. 803938

1/4" model  
Recommended for compressors ≤ 200 L  
Ref. 400150

## AUTOMATIC BLEEDER

Bleeder with electronic, programmable command  
Automatically empties compressor water tanks

Ref. 801822



## INFORMATION

JOINT	AVG. THREAD DIAMETER
1/8"	10 mm
1/4"	13 mm
3/8"	16,5 mm
1/2"	21 mm

## RECOMMENDED

## QUICK INSERTS



Ø6 grooved insert  
Ref. 400135



1/4" threading insert  
Ref. 400115



1/4" tapping insert  
Ref. 400125

## QUICK CONNECTIONS



Ø6 grooved rapid coupler  
Ref. 400105



1/4" threading coupler  
Ref. 400160



1/4" tapping coupler  
Ref. 400435

## GROOVED CONNECTIONS



Ø 1/4"  
Ref. 400465

Ø 1/2"  
Ref. 400475

## REDUCTIONS



1/4" M → 1/8" F  
Ref. 400485

3/8" M → 1/4" F  
Ref. 400495

1/2" M → 3/8" F  
Ref. 400505

## ADAPTORS



Ø 1/4"  
Ref. 400615

Ø 1/2"  
Ref. 400625

## NIPPLES



Ø 1/4"  
Ref. 400595

Ø 1/2"  
Ref. 400605

## Y



Ø 1/4"  
Ref. 400555

Ø 1/2"  
Ref. 400565

## TEES



Ø 1/4"  
Ref. 400535

Ø 1/2"  
Ref. 400545

## ELBOWS



Ø 1/2"  
Ref. 400585

Ø 1/4"  
Ref. 400575

## FIXING COLLARS



Sold per 10 pcs.  
Ø 11/13 mm  
Ref. 400675

WORKBENCH DRILL

Drills from 1.5 to 16mm through steel or wood  
12 speed settings

Supplied with :  
- 1 keyed chuck  
- 1 chuck cover

Ref.800825



CE CERTIFIED

PRODUCT SPECIFICATIONS


REF.	DRILLING CAPACITY	SPINDLE STROKE	POWER	TENSION	TOTAL HEIGHT	WEIGHT
800825	16 mm	60 mm	550 W	230V - 50 Hz	855 mm	30 kg
800846	16 mm	80 mm	550 W	230V - 50 Hz	1600 mm	76 kg

COLUMN DRILL

16 mm professional column drill  
Safety start/stop button, protected by a lock  
Belt cover opens with a switch  
+/- 45° tilting worktable  
Worktable size : 285 x 285 mm  
12 speed settings

Supplied with :  
- 1 compact cast iron vice  
- 1 chuck cover  
- 1 service key

Ref.800846



15 T - WORKBENCH HYDRAULIC PRESS

Dual speed hydraulic pump  
Set of "V" stands  
Stainless steel jack  
Manometer  
Automatic return of the piston  
Hydraulic safety system prevents overloading  
Ø 43mm piston head

DIMENSIONS

A: 965 mm  
B: 600mm  
C: 540mm  
D: 500mm  
E: 135mm  
F: 457mm  
G: 160mm  
H: 816mm  
L: 169mm



Ref.801574


20 T - HYDRAULIC PRESS

Equipped with a double-acting manual pump for quick action  
Convertible into single-acting for more pressure and less effort  
Supplied with a set of Vs and a perforated plaque

Ø 48mm piston head

DIMENSIONS

A: 1626mm  
B: 630mm  
C: 560mm  
D: 510mm  
E: 148mm  
F: 918mm  
G: 185mm  
H: 805mm  
L: 179mm



Ref.801572

BENCH GRINDER



Wheel/brush grinder  
Equipped to guarantee optimal safety conditions :

- Fail-safe brakes prevent an accidental start-up after a power outage
- Protection against overloading and overheating
- E-stop push button
- Adjustable screens and splinter guards

Ref.800843

PRODUCT SPECIFICATIONS

REFERENCE	TENSION	POWER	WHEEL DIMENSIONS	BRUSH DIMENSIONS	SPEED
800843	Single-phase 230 V	800 W	25 x 200 mm	20 x 200 mm	2800 rpm

< 60 dB

DOWNPIPES

Designed to equip 1 or 2 work stations. Supplied with :  
1 motor, 1 high temperature flexible pipe, 1 rubber nozzle, 1 nozzle stand, 1 switch, fixation collars



Installation and evacuation not included

SETUP EXAMPLES

For one workstation



For two workstations



Note : This example is given for information purposes only.  
The installation of a double-ended downpipe depends greatly on the architecture of the building, and each case should be studied individually. Contact us for a personalised quote.

PRODUCT SPECIFICATIONS

REFERENCE	MODEL	HOSE LENGTH	MOTOR	POWER	DEBIT	ENTRY DIAMETER	EXIT DIAMETER
803760	1 exit	5 m	230 V Single-phase	0,45 Kw	750 m³/H	100 mm	125 mm

WINDING VACUUMS

2 exits (7 m)




1 exit (7 m)



Jam-proof ratchet  
Adjustable and dismantable spring  
Reinforced support and bracket  
Vaccuum and aluminium fan  
High temperature rubber nozzle  
Supplied with nozzle stands\*

\* Only for ref. 803715

We recommend using a nozzle stand for ref. 803620 and 803717



! The rubber nozzle should not be in direct contact with the vehicle's exhaust pipe

PRODUCT SPECIFICATIONS

REFERENCE	MOTOR	POWER	DEBIT	HOSE DIAMETER	HOSE LENGTH	MAX. TEMPERATURE	NUMBER OF EXITS	WEIGHT	OVERALL DIMENSIONS (mm)		
									L	W	H
803715	Single-phase 230 V - 50 Hz	0,45 Kw	750 m³/H	100 mm	7 m	220 °C	2	48 kg	1100	80	80
803620							1	45 kg			



ACCESSORIES

METAL POST

Winding vacuum suspension  
3 m tall  
Ref.803617



HOSE JOINING SYSTEM

Ø 100 mm  
For flexible pipes without fixation collars

Ref.803643



RELEASE BALANCER

8/10 kg

Ref.803742



MOTOR-LESS WINDER



PRODUCT SPECIFICATIONS

REFERENCE	HOSE DIAMETER	HOSE LENGTH	NUMBER OF EXITS	OVERALL DIMENSIONS (mm)
803615	100 mm	7 m	1	80 x 80 x 80

DOUBLE NOZZLE KIT

Y 100 x 100 x 100 mm  
2 100 mm hoses  
2 100 x 150 mm nozzles  
2 nozzle stands  
fixation collars

Ref.803736



VACUUMS

Molded aluminium to prevent corrosion  
Quieter than a plastic or sheet metal fan  
High pressure  
Integrated control unit



PRODUCT SPECIFICATIONS

MODEL	REF.	MOTOR	POWER	DEBIT	SOUND LEVEL	ENTRY DIAMETER	EXIT DIAMETER	WEIGHT
M1	803600	220 V single-phase	0,45 KW	750 m3/h	66 db	100 mm	125 mm	15 kg
M5	803605		0,90 KW	1250 m3/h	73 db		125 mm	20 kg
M7	803610	380 V three-phase	1,10 KW	1500 m3/h	77 db		200 mm	28 kg

RUBBER NOZZLE

Ø100/150 : Ref.803622



SUPPORT STAND

Ref.803621



Y FITTING

Ø100 x 100 x 100 : Ref.803625



CRUSH-PROOF RUBBER HOSE

Ø100 : Ref.803631



FIXATION COLLAR

Ø100 : Ref.803629



RUBBER COLLAR COVER

Ø100 : Ref.803630



MANUAL DAMPER Ø100

Ref.803663

ALUMINIUM TUBE Ø100, 1.5 M LONG

Ref.803633



ALUMINIUM ELBOW Ø100

Ref.803635



ALUMINIUM TEE Ø100

Ref.803634



WALL FIXATION COLLAR

Ø100 : Ref.803637

Ø125 : Ref.803638




CHIMNEY CAP Ø125

Ref.803636



QUICK CONNECT Ø100

Ref.803644

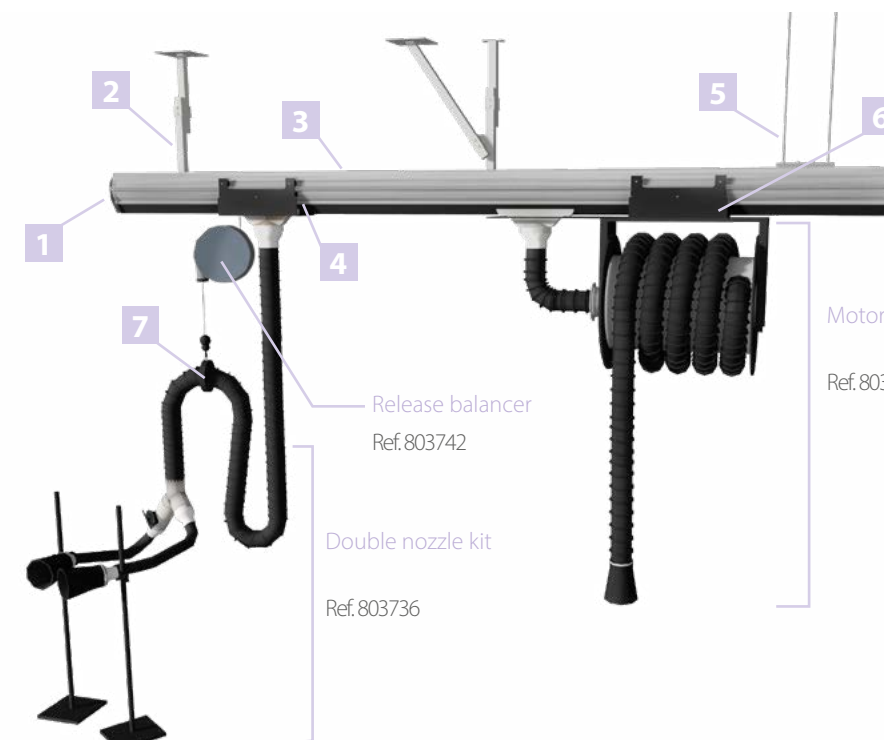

Motor-less winder

Ref.803615

Release balancer  
Ref.803742

Double nozzle kit

Ref.803736

MAROLO SERVICES




We'll research your project

+33 (0)2 41 29 29 29

CUSTOM RAILING

1 END DAMPER PLUG

Ref. 803654



2 ARTICULATED RAIL SUPPORT

Facilitates railing fixation in any orientation  
1 support per 3 meters of railing  
Ref. 803651



3 ALUMINIUM RAILING

With replaceable rubbers  
Stands up to high temperatures  
Adhesive kit included  
3 meter length : Ref. 803640  
6 meter length : Ref. 803645



4 SET OF 4 STOPPERS

Ref. 803642



7 HOSE SUSPENSION BELT

1 belt + 3m chain

Ø 100 mm  
Ø 125 mm  
Ø 150 mm  
Ref. 803658



RAIL END FIXATION

Ref. 803655



RAIL JUNCTION

Ref. 803652



EXTERNAL EXTRACTION PIECE

Ø 100 mm → Ø 125 mm  
Ref. 803653



5 THREADED CEILING SUPPORT (NON ORIENTABLE)

Supplied with 2 threaded M6 rods (1m long)  
Ref. 803650



6 VACUUMING CART

To mount a release balancer  
Supplied with :  
Rubber nozzle with grip clamp,  
A high temperature hose (250°C)

Ref. 803656



2 DRAWERS STEEL WORKBENCHES



Steel workbench - 2 m

\*The workbench can be customized with the addition of a sticker: Ref. PAINT03 (available colors: RED ORANGE GREEN BLUE GREY)

PRODUCT SPECIFICATIONS						
MODEL	REF.	HEIGHT	LENGTH	WIDTH	WEIGHT	COLOR
1,5 m	801310Y	880 mm	1500 mm	640 mm	73 kg	Black
2 m	801305Y		2000 mm		93 kg	


NITRILE MAT

Protects the workbench top  
Hydrocarbon-resistant  
3 mm thick

2 precut lengths :  
1500 x 700 mm : Ref. 801381  
2000 x 700 mm : Ref. 801382



TOOL STORAGE PANEL



Available colorways : BLACK GREY \*

\* Within the limit of available stock

PRODUCT SPECIFICATIONS					
MODEL	REF.	HEIGHT	LENGTH	WEIGHT	COLOR
1,5 m	801312		1500 mm	7 kg	Grey*
1,5 m	801312Y				Black
2 m	801330	830 mm	2000 mm	9 kg	Grey*
2 m	801330Y				Black

PROFESSIONAL RAMP

- > High quality aluminium
- > Robust, lightweight, and easy to carry
- > Equipped with a safety strap to secure the ramp when loading or during transit

Sold by the unit  
Length : 2200 mm (Folded : 1450 mm)  
Width : 290 mm  
Capacity (per ramp) : 300 kg (600 kg per pair)  
Weight : 9 kg

Ref. 800578



SET OF 100 HOOKS


Tool-hanging hooks for  
pegboards or trolleys

- 50 pcs. 70 mm hooks
- 50 pcs. 100 mm hooks

Ref. 801332



ULTRASONIC TANK - 28L



Digital ultrasonic cleaning tank for professional use  
Two power levels : Normal (600W) and Turbo (900W)  
0-30 minutes timer with automatic shutdown  
800W heating, from 0°C to 80°C, separate from US emission  
Stainless steel tank 490x290x200mm  
Capacity of approx. 28L

Supplied with : Bleeding valve, lid, stainless steel basket



BEFORE  
CLEANSING

AFTER  
5 MINUTES

ALCALINE SOLUTION FOR ULTRASONIC TANK

To degrease metallic and plastic parts  
Capacity : 1L

Ref. 801218



PRODUCT SPECIFICATIONS										
REFERENCE	CAPACITY	INSIDE DIMENSIONS			OUTSIDE DIMENSIONS			POWER	TEMPERATURE	WEIGHT
		HEIGHT	LENGTH	WIDTH	HEIGHT	LENGTH	WIDTH			
801244	28 L	200 mm	490 mm	290 mm	400 mm	600 mm	400 mm	600/900 W	0°C to 80°C	14 kg

WASTE OIL TROLLEY



Collection tray designed to easily slide between the lift's platform and the motorcycle

Adjustable height from 900 to 1100 mm

60L capacity

Ref. 801207




**MADE IN FRANCE**



# MAROLOBENCH

**SCOOTER AND MOTORCYCLE TEST BENCH**

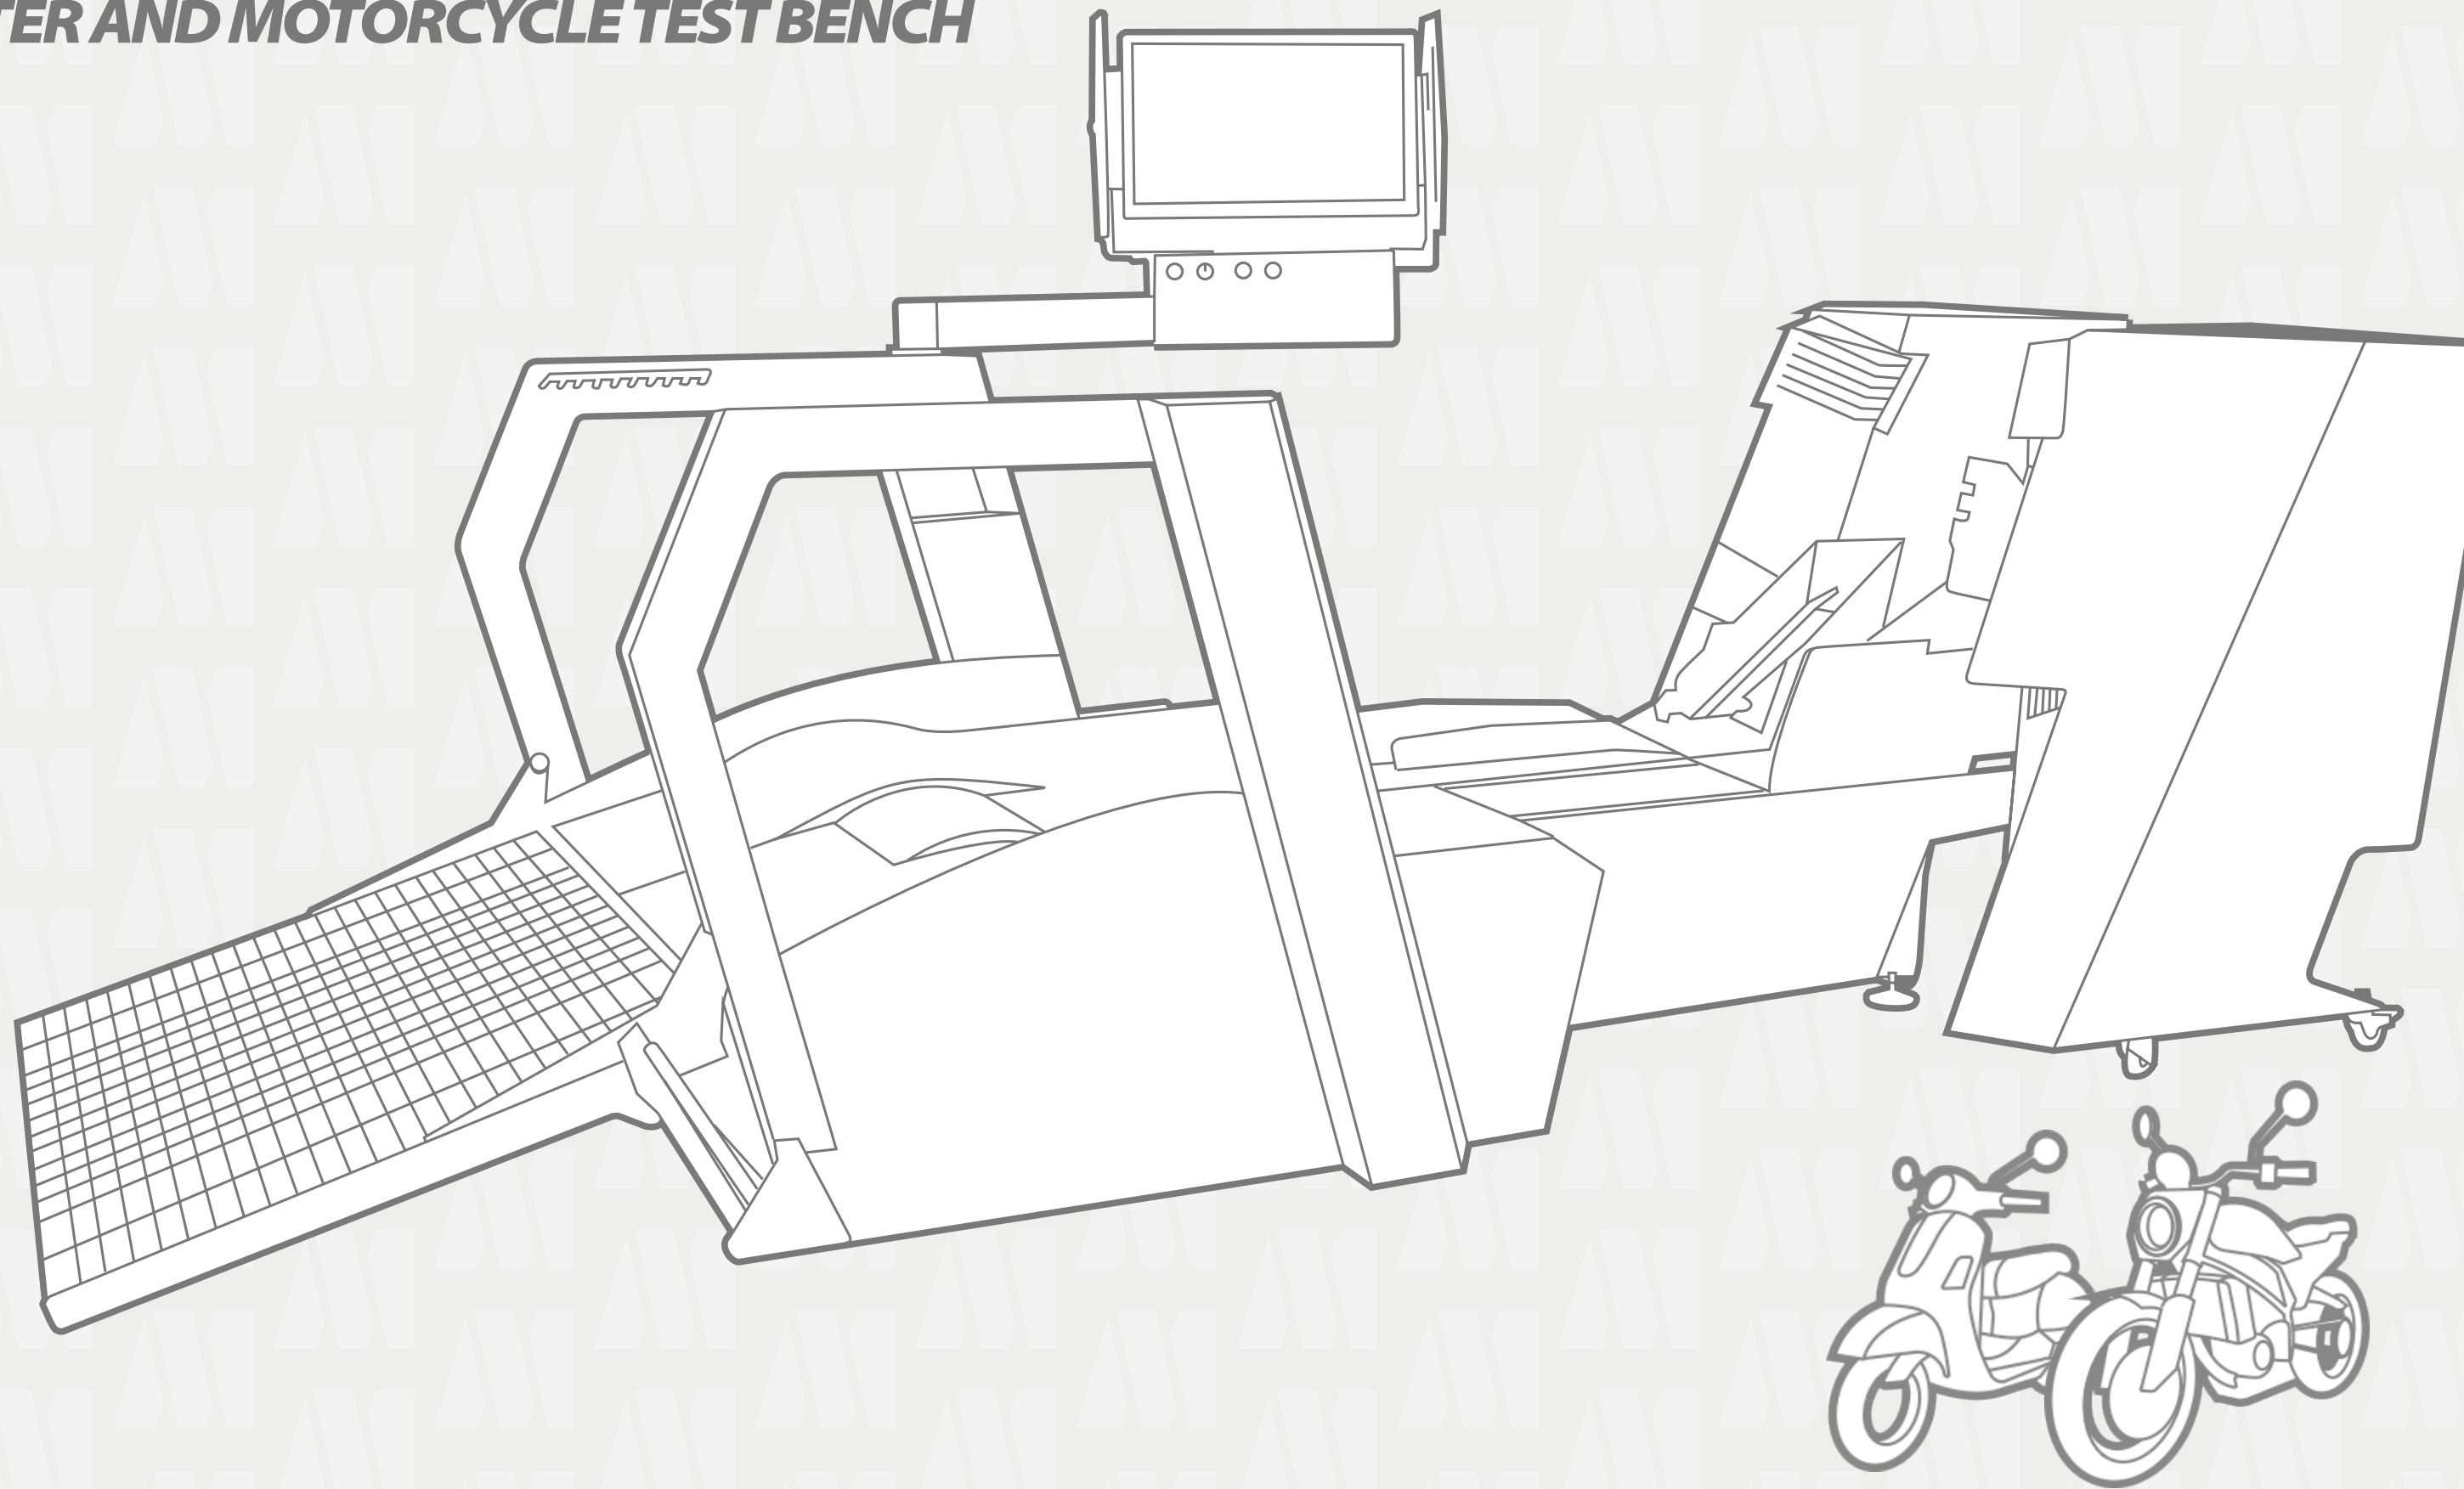

POWER FULL : SCOOTER AND MOTORCYCLE TEST BENCH

★★★  
CE 2006/42  
COMPLIANT  
★★★

- > For safe indoors testing
- > Save time on on-road testing
- > Increase your service offering :
  - Additional fuel injectors
  - Power testing
  - ...


- On-road simulation <
- Customizable database <
- Stabilization of RPM, Speed per step <
- Torque, power check and engine curve <
- Calculation of power and torque at the roll, rim and crankshaft <
- Variation curve (specific to scooters) <
- True max. speed check (taking SCX into account) <
- Carburization measurement by lambda sensor <
- Geometry check (alignment, fork, frame) <

- 1 Equipped with a 22" touchscreen
- 2 exhaust gas extraction nozzles
- 2 guardrails
- 3 1 access ramp mounted on a gas spring
- 4 1 automatic wheel clamp
- 5 2 lateral wind tunnels



PRODUCT SPECIFICATIONS						
MODEL	REFERENCE	H	L	W	POWER SUPPLY	WEIGHT
POWERFULL	801050	1200 mm	2850 mm	1400 mm	Single-phase 230 V - 50 Hz - 32 A	≈ 800 kg*

\* Depending on options

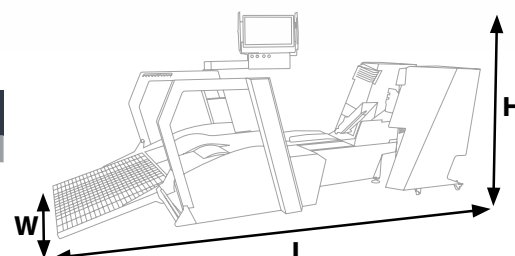

SOUNDPROOF CABIN


SOUNDPROOF CABIN

Designed for motorcycle workshops, this cabin reduces noise pollution from the use of a test bench and improves working comfort

The cabin is equipped with :

- Double swing doors with half-window
- 3 plain walls (lateral window optional)
- Neon lights
- Silencer kit allowing a -30 dBA decrease (measured 1m away)

Ref.801052

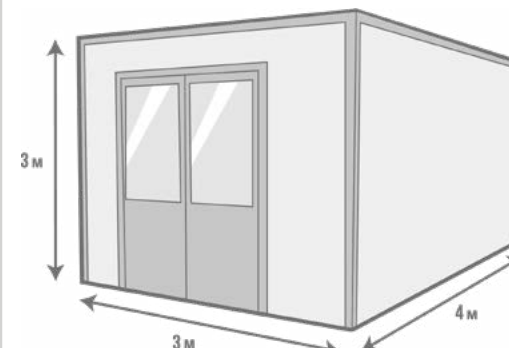

We'll research your project  
☎ +33 (0)2 41 29 29 29




MAROLOTOUCH 3D FRAME TESTER

Compact cart, mounted on wheels and equipped with 4 telescopic feet for stable positioning  
3D jointed arm to measure distances in space  
Supplied with 3 probes (100-200-350 mm)  
Supplied with a laptop and color printer  
Exclusive WinTouch software to create printing records  
Evolutive motorcycle frames database

Two control and measure settings :  
"CERTIFICATION" mode :  
Compare your measurements with those provided by manufacturers  
"CONTROL" mode :  
Create a customized database from your recordings

Ref.801833

Annual software update :  
Ref.801841



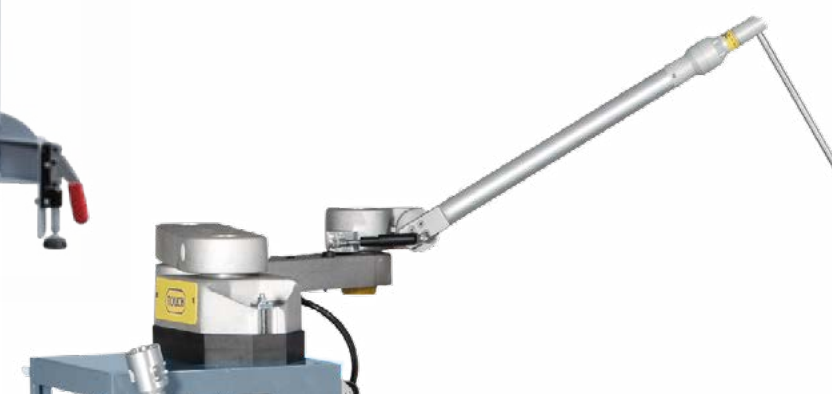


COMPUTER  
+  
PRINTER  
INCLUDED



**MAROLODIAG**

**DIAGNOSTIC DEVICES**

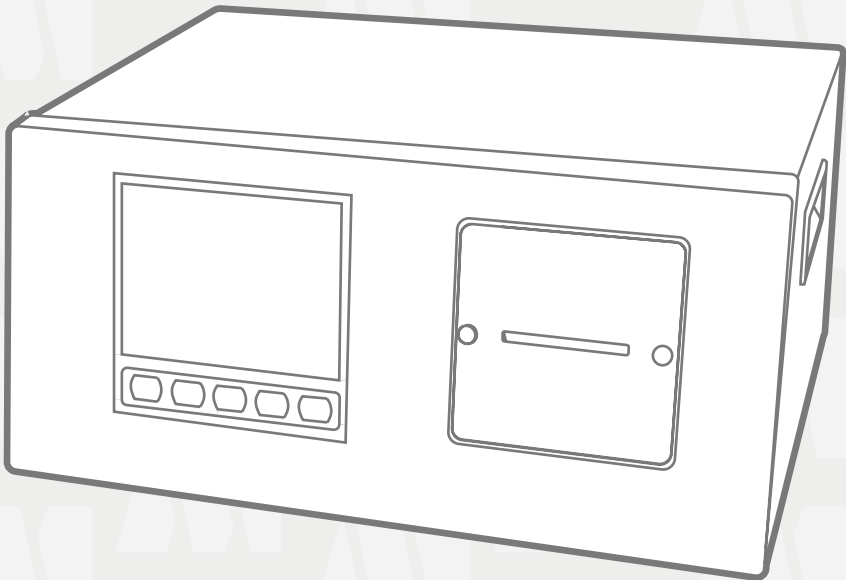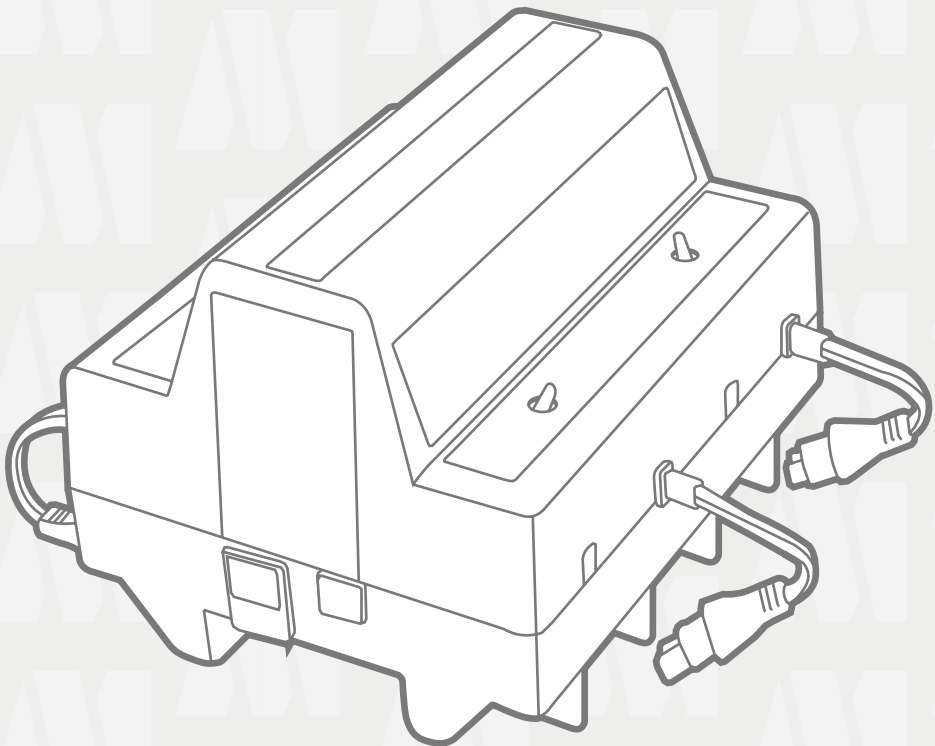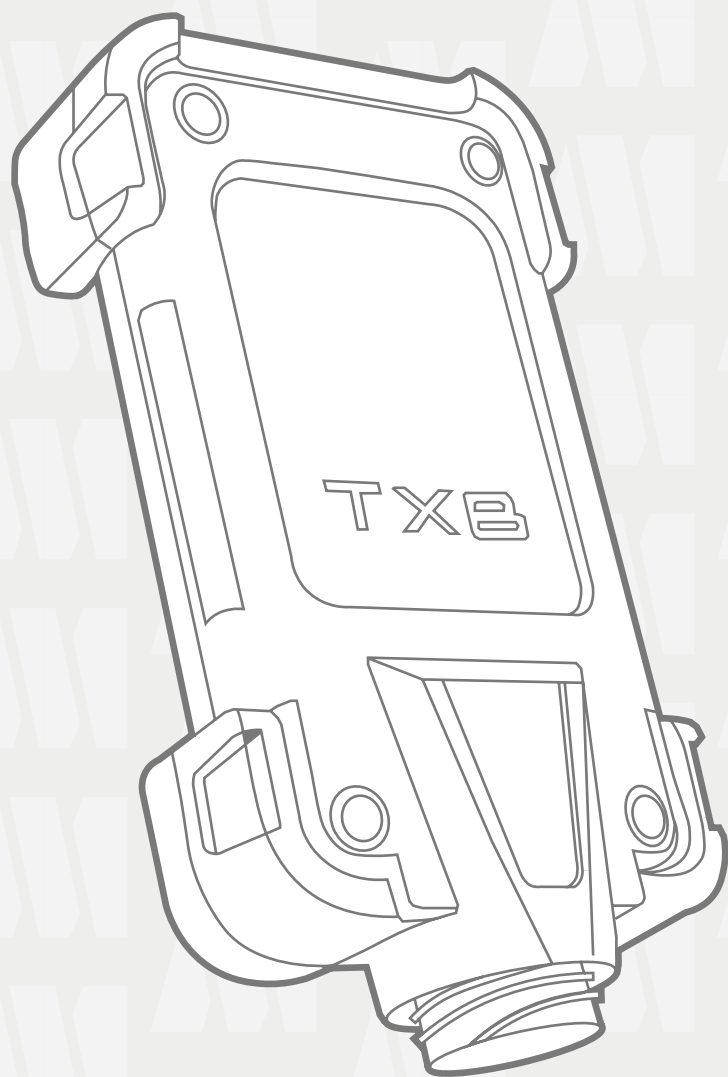

MULTI-BRAND DIAGNOSTIC DEVICES

NAVIGATOR TXB EVO Ref. 800405

COMPATIBLE WITH



INCLUDES THE NEW IDC5 SOFTWARE

Faster communication with the computer

More intuitive graphics, and easier to use

More comprehensive display of relevant data

Available features :

NEW : «Interactive electrical diagrams» feature <

Allows you to browse and refer to electrical diagrams of various electrical equipments<  
Interactive mapping of signals entering and exiting the computer<

Read and clear out error codes <

Print out and save any identified defects and their current status (current, saved, archive <  
with your company's contact information

Settings display <

Numeric display, or in the form of a graph <

8 parameters can be displayed simultaneously <

Said parameters can be saved over a period of 30 minutes <

Print out the recording with the client's information <

Actuators testing <

Base parameters (when available) <

Maintenance indicators reset <

Electrical diagrams (about 50% of models available) <

Management of registered customers and vehicles <

Issuing of repair orders <



The **IDC5** software, supplied with the **TXB**, gives you access to numerous electrical diagrams (covering ≈ 50 % of models), and allows you to **save and print** any detected faults, chosen parameters, as well as establish **detailed service reports**



MULTI-BRAND DIAGNOSTIC DEVICES

TEXPACK UPDATE SUBSCRIPTION



Ref. 800666

IF YOU ALREADY OWN A **TXB** : PLEASE **CONTACT US** TO UPDATE YOUR SUBSCRIPTION IF YOU ARE SKIPPING VERSIONS

CONNECTION CABLES

- 800683.....APRILIA MARELLI PIAGGO + 12V (3151/AP01) cable
- 800708.....HONDA IMMOBILIZER adapter
- 800688.....HONDA cable before 2004 (3151/AP06)
- 800655.....HONDA cable since 2004 (3151/AP20)
- 800693.....KAWASAKI (3151/AP11) cable
- 800662.....KAWASAKI autodiagnostic cable, after 2007 (3151/AP22)
- 800644.....KAWASAKI autodiagnostic cable, since 2010 (3151/AP31)
- 800626.....KAWASAKI Interface cable, CAN network (3151/AP29)
- 800694.....SUZUKI-CAGIVA reprogramming cable (3151/AP12)
- 800681.....SUZUKI autodiagnostic cable (3151/AP15)
- 800718.....YAMAHA (3151/AP59) cable
- 800691.....BMW until 1999 (3151/AP09A)
- 800723.....BMW from 1999 to 2016 Euro3 (3151/AP37)
- 800724.....BMW G450X adaptor (to use with 3151/AP37)
- 800687.....TRIUMPH (3151/AP05) cable
- 800690.....PEUGEOT (3151/AP08) cable
- 800640.....DUCATI autodiagnostic cable, since 2010 (3151/AP23)
- 800709.....Official DUCATI maintenance cable (3151/AP 44)
- 800684.....APRILIA cable for SAGEM equipment (3151/AP02)
- 800685.....APRILIA cable for D-TECH equipment (3151/AP03)
- 800695.....APRILIA (SVX ET RXV) (3151/AP14) cable
- 800719.....APRILIA - GUZZI 3151/AP60 cable
- 800686.....BENELLI (3151/AP13) cable for Sagem/Walbro/Athena equipment
- 800706.....BENELLI Euro4 OBDII cable for Athéna computer (AP52/OBDII)
- 800712.....BENELLI (CAN protocol) and PARSUN (3151/AP54) cable
- 800627.....QUADRO and BENELLI (3151/AP36) cable
- 800642.....MV AGUSTA autodiagnostic cable, since 2012 (3151/AP34)
- 800641.....BIMOTA autodiagnostic cable (3151/AP25)
- 800707.....Moto MORINI Euro4 (3151/AP57) cable
- 800715.....HARLEY-DAVIDSON (3151/AP57) cable
- 800716.....ROYAL ENFIELD (3151/AP61) cable
- 800671.....KTM autodiagnostic cable (3151/AP39)
- 800628.....SEADOO programming (3151/AP43) cable
- 800629.....POLARIS autodiagnostic cable (3151/AP45)
- 800639.....DAELIM autodiagnostic cable (3151/AP38)
- 800696.....BUELL GPS reader cable (3151/AP18)
- 800643.....KEEWAY autodiagnostic cable (3151/AP33)
- 800657.....SYM autodiagnostic cable (3151/AP32)
- 800702.....KYMCO (3151/AP46) cable
- 800703.....TGB ATV (3151/AP50 OBD) cable
- 800705.....SWM Euro4 (3151/AP51) cable
- 800711.....SYM cable for DEL'ORTO system(3151/AP48)
- 800713.....Power supply cable for SWM vehicles (3151/AP55)
- 800714.....Power supply adaptor cable for BRP group (3151/AP56)
- 800717.....OBD Euro5 MOTO (3151/AP58) cable
- 800689.....Universal MOTO cable with branching points (3151/AP07)



BATTERY MAINTENANCE

OPTIMATE PRO 4 BATTERY CHARGER



Automatic battery charge and maintenance  
Automatic selection of battery type and intensity  
"New" selection for the first charge of MF and YTZ batteries  
Automatic selection of the program in charge of the size, type and battery status  
SAE connectors: for better contact and long life service

Ref.800480

OPTIMATE PRO 2 BATTERY CHARGER

To charge 2 batteries simultaneously  
Both outlets can be plugged into the same battery to reduce charging time

Ref.800599



OPTIMATE PRO S BATTERY CHARGER

Selection "New" for the first charge of MF and YTZ batteries

Ref.800598



PRODUCT SPECIFICATIONS

MODEL	REF.	MF AND AGM BATTERY PRIMING	DESULFATION	TEST TYPE	MIN. BATTERY CAPACITY	BATTERY SELECTION	OUTLETS AND CHARGING CURRENT
Optimate Pro 4	800480						4 outlets from 2A to 4A
Optimate Pro 2	800599	Yes	Oui	Static	None	Automatic	2 2A outlets
Optimate Pro S	800598						1 2A to 4A outlet

OPTIMATE LITHIUM 4S CHARGER

Professional charger for lithium batteries  
Suited to prime batteries  
Energy saving mode  
Integral electronic protection against user errors

Ref.800470



OPTIMATE LITHIUM 4 BANK CHARGER

Generic professional charger for lithium batteries  
4 0,8 A outlets

Ref.800472




PRODUCT SPECIFICATIONS

MODEL	REF.	LITHIUM	BATTERY TYPE	TEST TYPE	MIN. BATTERY CAPACITY	CHARGING VOLTAGE	OUTLETS AND CHARGING CURRENT
LITHIUM 4S	800470	Yes	LIFEPO4 / LFP 4 or 5 series cell	Static	2.5 to 200 Ah	12.8 to 16 V	1 9.5A (12.8 V) or 7.5A (16 V) outlet
LITHIUM 4 BANK	800472	Yes	LIFEPO4 / LFP 4 series cell	-	2 to 30 Ah	12.8 to 13.2 V	4 0.8A outlets

BATTERY MAINTENANCE

BATTERYMATE 150/9 CHARGER/TESTER

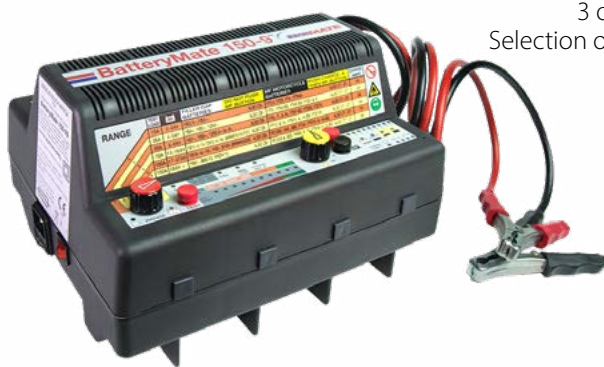

For battery charge, testing and maintenance  
3 or 15 seconds load-shedding, up to 150 A, to simulate vehicle startup  
Selection of charging current and test depending on the battery (from 1 to 9 A)

Suited to prime batteries

Automatic recovery of discharged or sulfated batteries

Ref.800521

XS 800 CHARGER



Fully automatic  
For all 12V battery types : lead, MF, VRLA, AGM, gel cell...  
Battery capacity : 1.2 to 32 Ah and up to 100 Ah for maintenance

Load test  
Supplied with :  
1 cable with clamps  
1 cable with ring terminals

Ref.800542

**RING TERMINAL CABLE ONLY**  
For XS 800 charger

Ref.800548



TESTMATE DIGITAL BATTERY TESTER

Checks 12V batteries from 2 to 35 Ah (lead/acid, MF-AGM or gel cell)  
Instant detection of an out of service battery

Ref.800547



MAROLOBOOST BOOSTER

Scooter and motorcycle booster  
Thin clamps  
12 V - 16 A

Ref.800564



2.5M CABLE EXTENSION

Universal 2.5 m cable extension

Ref.800493



RING TERMINAL CABLE

Protected ring terminal cable by TecMate

Ref.800490





## ELECTRONIC RPM GAUGE

For 2T and 4T engines, with or without wasted spark  
Usable remotely or with a clip  
Capacity : 100 to 19500 rpm  
Accuracy :  $\pm 10$  rpm

Ref.801425



## STANDARD MULTIMETER

AC and DC voltage (maximum of 600 V for DC)  
AC and DC electric current (maxi 10 A)  
Resistance (maxi 20 M $\Omega$ ) with audible test  
"Test diode" mode  
Temperature probe ( 700 °C maximum)

Ref.500802



## VIDEOSCOPE

Equipped with a switch probe (Dual camera probe)  
S-video output  
Camera head :  $\varnothing 5,5$  mm  
2,4" LCD display  
Adjustable zoom and brightness  
Supplied with a case, mirror, magnet and hook  
Oil- and water-proof

Ref.500618



Display examples



## ELECTRONIC COMPRESSION METER

Digital display  
Sparkplug adapter  
M10 - M12 - M14

Ref.800500



## MOTOMETER® COMPRESSION METER

Supplied with quick connects to prevent leaking over time  
Measures from 3.5 to 17.5 Bar  
Supplied with 100 diagram sheets

Ref.800502



Lot of 100 MOTOMETER® diagram sheets

Ref.800503



## MAROLOGAZ - 4 GASES ANALYSER



4 gases analyser : CO, CO<sup>2</sup>, HC, O<sup>2</sup>  
Rapid preheating (<5min to 20°C)  
Automatic condensation expulsion  
LCD display  
Thermal printer  
Meets OIML R99 Class 0 and ISO 3930 standards

Ref. 500871

## VACUUMATE - ELECTRONIC VACUUM GAUGE



Vacuum gauge inlet and outlet valve seal tester  
Rev counter up to 2500 rpm (for 2-stroke or 4-stroke engines)  
Sealed casing

Supplied with :  
2 sets of 4 M5 and M6 flexible end-pieces

Ref. 800524

## IGNITIONMATE - IGNITION TESTER

Workshop oscilloscope  
2 LED displays for 2 simultaneous recordings  
Allows comparison of voltage and primary and secondary currents, on 1 cylinder  
Primary circuit : single scale, max. 400 Vpk (on primary ignition coil)  
Secondary circuit selection 10/20/40 kV

Ref.800516



## IGNITIONMATE DUO - DUAL IGNITION TESTER

Workshop oscilloscope  
2 LED displays for 2 simultaneous recordings  
Allows comparison of voltage and primary and secondary currents, on 2 cylinders  
Primary circuit : single scale, max. 400 Vpk (on primary ignition coils)  
Secondary circuit selection 20/40 kV

Ref.800559





## TPMS - TYRE PRESSURE MONITORING SYSTEM

Communicates with the valve on each wheel  
Checks sensor wear and allows its replacement  
Visualisation of pressure, temperature, battery charge information  
TPMS database of compatible parts and diagnostic information from the manufacturer

Texa TPS interface  
IDC5 Compatible  
USB or wireless connection  
8h battery life

Ref.800402



## SUBSCRIPTION

Yearly TPMS subscription

Ref. 80066G

## ELECTRONIC TENSION GAUGE

Measures primary belt tension  
A microphone measures the resonant frequency to check proper belt tension  
Reference measurements included

Backlit LCD display  
Accuracy :  $\pm 1,5$  Hz  
6h battery life

Ref.601009



## HEADLIGHT BEAM SETTER

### Adjusting beam direction

Before adjustment :



After adjustment :



2 laser aiming beams : horizontal and vertical  
Integrated luxmeter calculates lightbulb output in dipped-beam and mainbeam modes

Also suited for xenon and dual headlights

CE and NFR 63.801 compliant  
PV UTAC n° 04/03/03830.

Ref.801890

### Illuminance control (lux)

Dipped-beam :






Mainbeam :



# MAROLOLUB

## LUBRICANT DISTRIBUTION

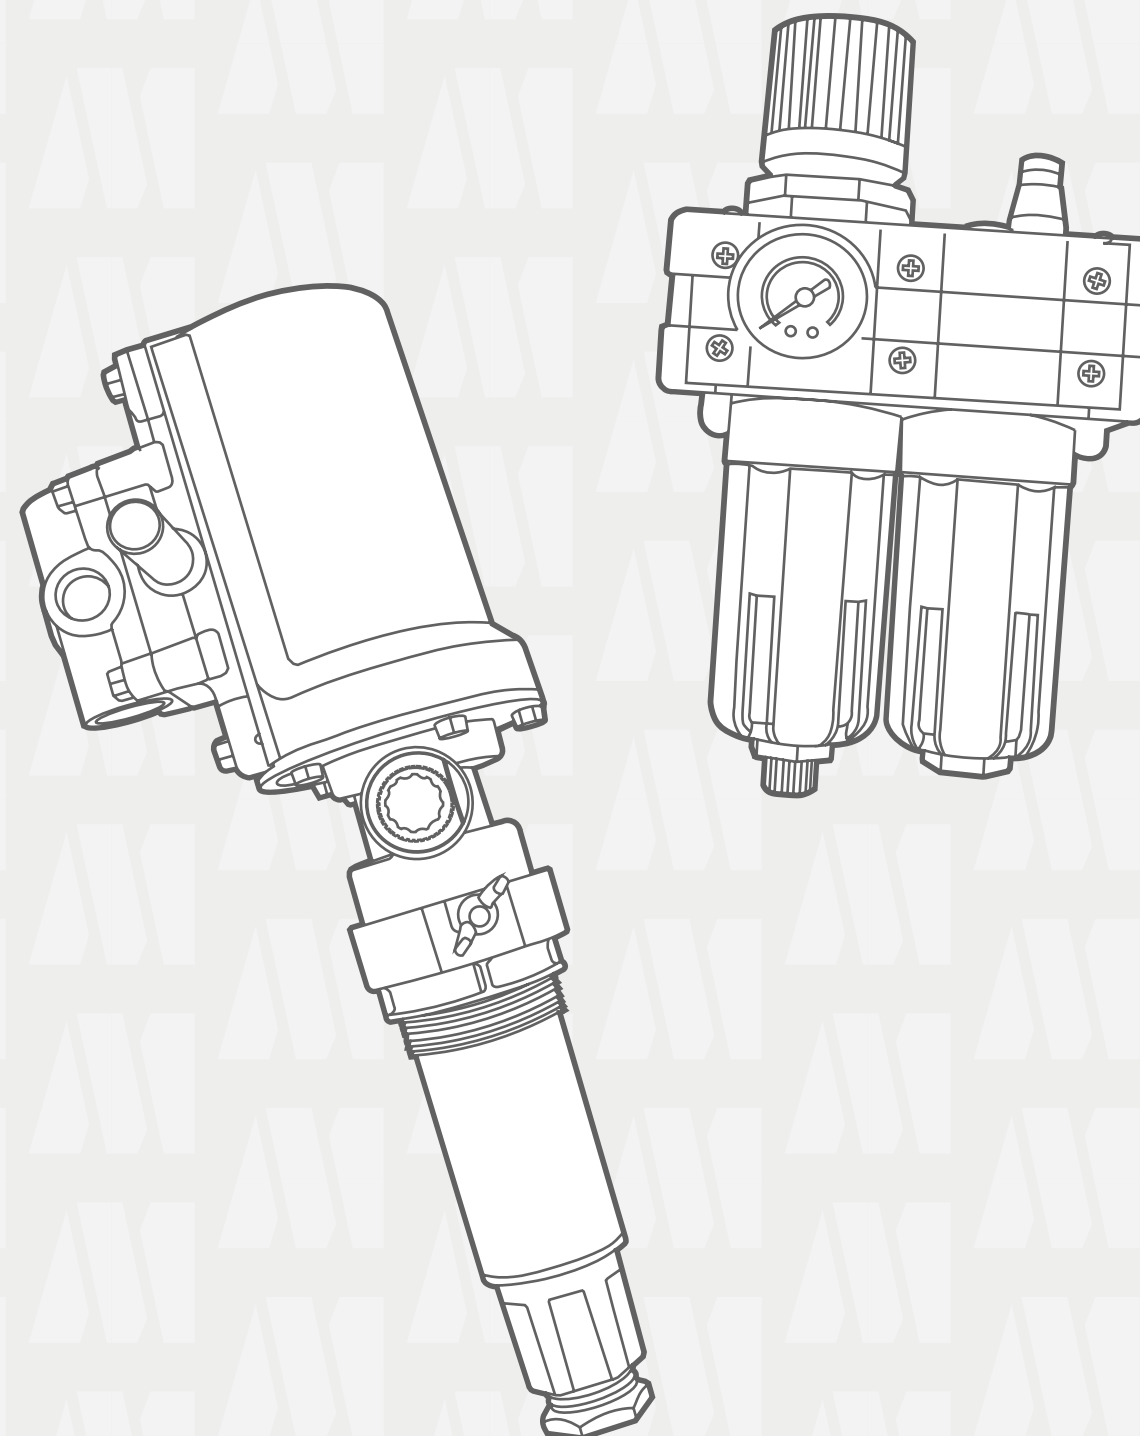

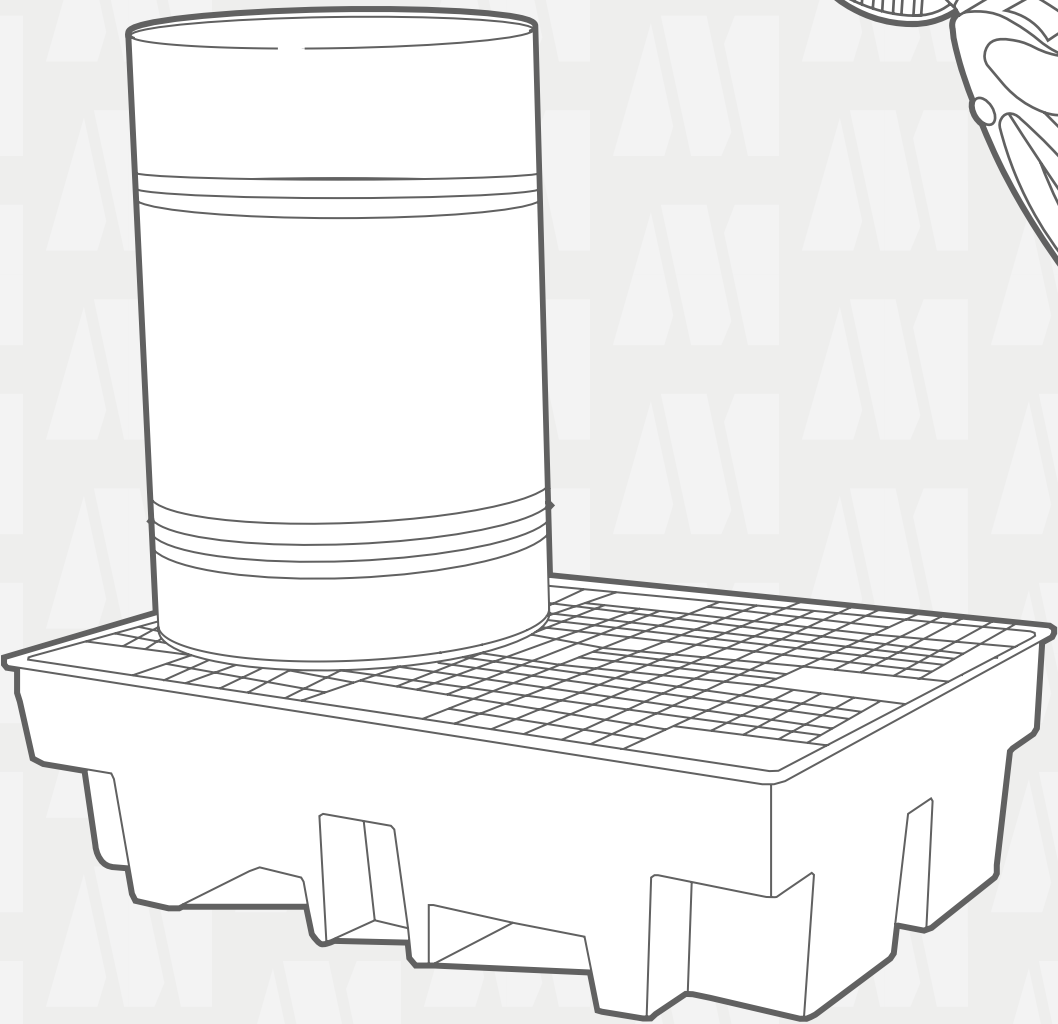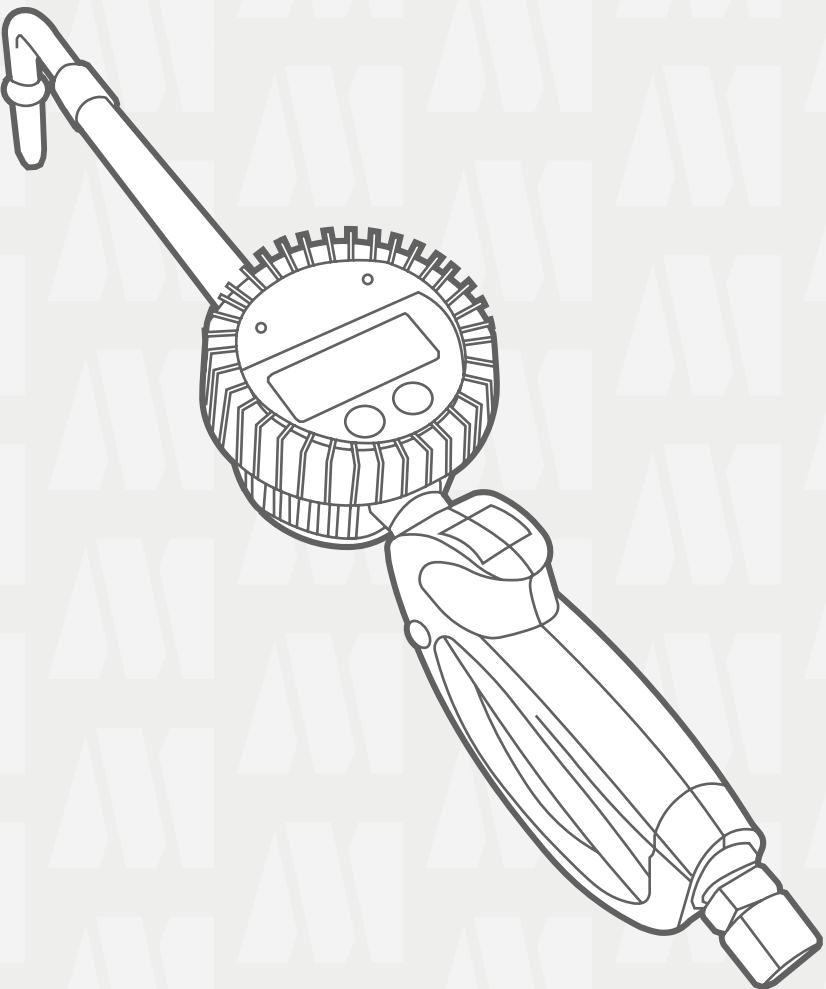

LUBRICANT DISTRIBUTION EQUIPMENT

OIL PUMP



Oil tank pump 3:1  
With integrated valve

PRODUCT SPECIFICATION								
MODEL	REF.	PRESSURE RATIO	MAX. DISTANCE	MAX. AIR PRESSURE	DEBIT	AIR INPUT	LUBRICANT INPUT	LUBRICANT OUTPUT
5:1 oil pump	803912	5:1	> 30m	10 Bar	20 L/min	1/4" BSP female	3/4" BSP female	1/2" BSP male
3:1 oil tank pump	803911	3:1	≤ 30 m	8 Bar	14 L/min	1/4" BSP female	3/4" BSP female	1/2" BSP male

LUBRICATING AIR FILTER 1/2"

Essential to protect your air network and your pneumatic tooling

Input : 1/2" female  
Output : 1/2" female

Ref. 803938



AIR PRESSURE REGULATOR

Protects the pump from network overpressure  
Increases the pump's longevity

Input : 1/4" female  
Output : 1/4" female

Ref. 803937



ESSENTIAL

1/2" OIL HOSE

For winders, networks or mobile appliances  
2 female connections  
Supplied with male connector



REF.	LENGTH
803921	1 m
803922	2 m
803924	4 m
803925	5 m
803930	10 m

DIGITAL COUNTER

Ref. 803942



SAFETY VALVE WITH RETURN

Input : 1/2" female  
Output : 1/2" female  
Tank return 1/2" female  
Factory-set at 50 Bars

Ref. 803940





LUBRICANT DISTRIBUTION EQUIPMENT

PLAIN HANDLE WITHOUT COUNTER

- Ergonomic anti-pinching handle
- Flexible cable with 90° elbowed nozzle
- Anti-drip
- Trigger securely encased by the handle

Ref. 803904



ELECTRONIC COUNTER HANDLE

- Digital display meter with double counter
- Ergonomic anti-pinching handle
- Flexible cable with 90° elbowed nozzle
- Anti-drip
- Trigger securely encased by the handle
- Battery operated (not welded in place)

Ref. 803903



WALL-MOUNTED PUMP SUPPORT

- Compatible with 3:1 and 5:1 ratio pumps
- 4 Ø10 mm perforations for easy installation
- 2" bung nut included

Ref. 803934



ANTI-DRIP TRAY

- Wall-mounted anti-drip tray for oil handles
- Removable collection tray
- Integrated handle support
- 2 Ø10 mm perforations


Ref. 803931



DIP PIPE AND BUNG NUT

- For oil tanks
- 3/4" dip pipe, 0.9m long
- Supplied with a 2" bung nut
- To shorten according to tank depth

Ref. 803936

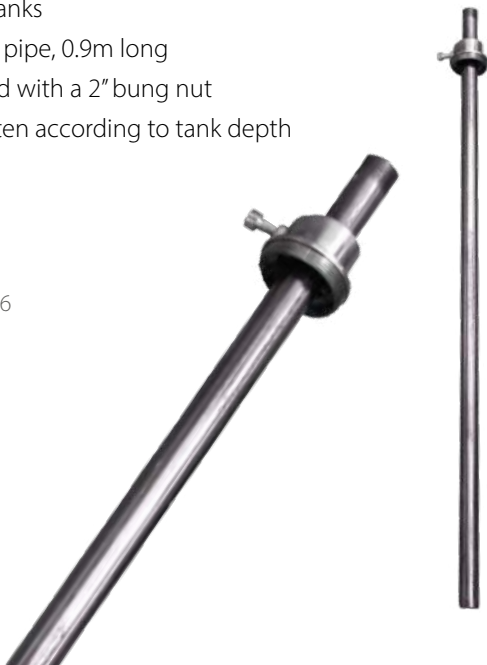

JUNCTION KIT WITH DIP PIPE AND BUNG NUT

- For wall-mounted pumps
- 2.5m hose
- Input : 1/2" BSP female, output : 1/2" male
- Manual oil valve with KNK nozzle
- 3/4" dip pipe, 0.9m long, supplied with a 2" bung nut
- To shorten according to tank depth

Ref. 803935



LUBRICANT DISTRIBUTION EQUIPMENT

OPEN OIL HOSE REEL 1/2" 10+1

- Open oil hose reel
- 1/2" hose
- 10 m length + 1 m for network connection
- 3 mounting positions

Ref. 803910



CLOSED OIL REEL 1/2" 12+1

- Closed oil reel
- 1/2" hose
- 12 m length + 1 m for network connection
- 3 mounting positions

Ref. 803906



MANUAL OIL VALVE 1/2"

- For oil

Ref. 803941



MANUAL DECOMPRESSION VALVE 1/2"

- For compressed air

Ref. 803939



CONTAINMENT BUND




For 4 oil drums



Designed for 100L oil drums  
Removable PE gratings  
Rotomoulded PEHD


For 2 oil drums

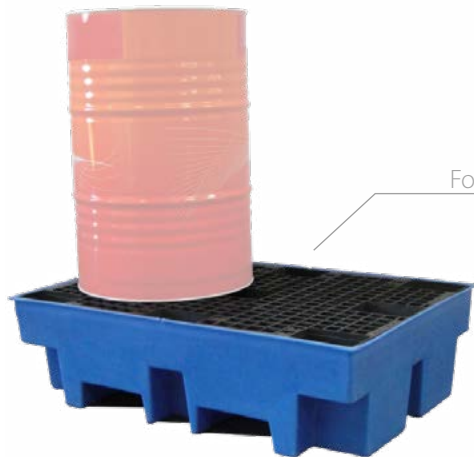

REF.	N° OF OIL DRUMS	CAPACITY	DIMENSIONS
801291	2	240 L	1220 x 820 x 330 mm
801292	4	410 L	1310 x 1310 x 370 mm

# MAROLOTOOLS

**TOOL TROLLEYS AND SMALL TOOLING**

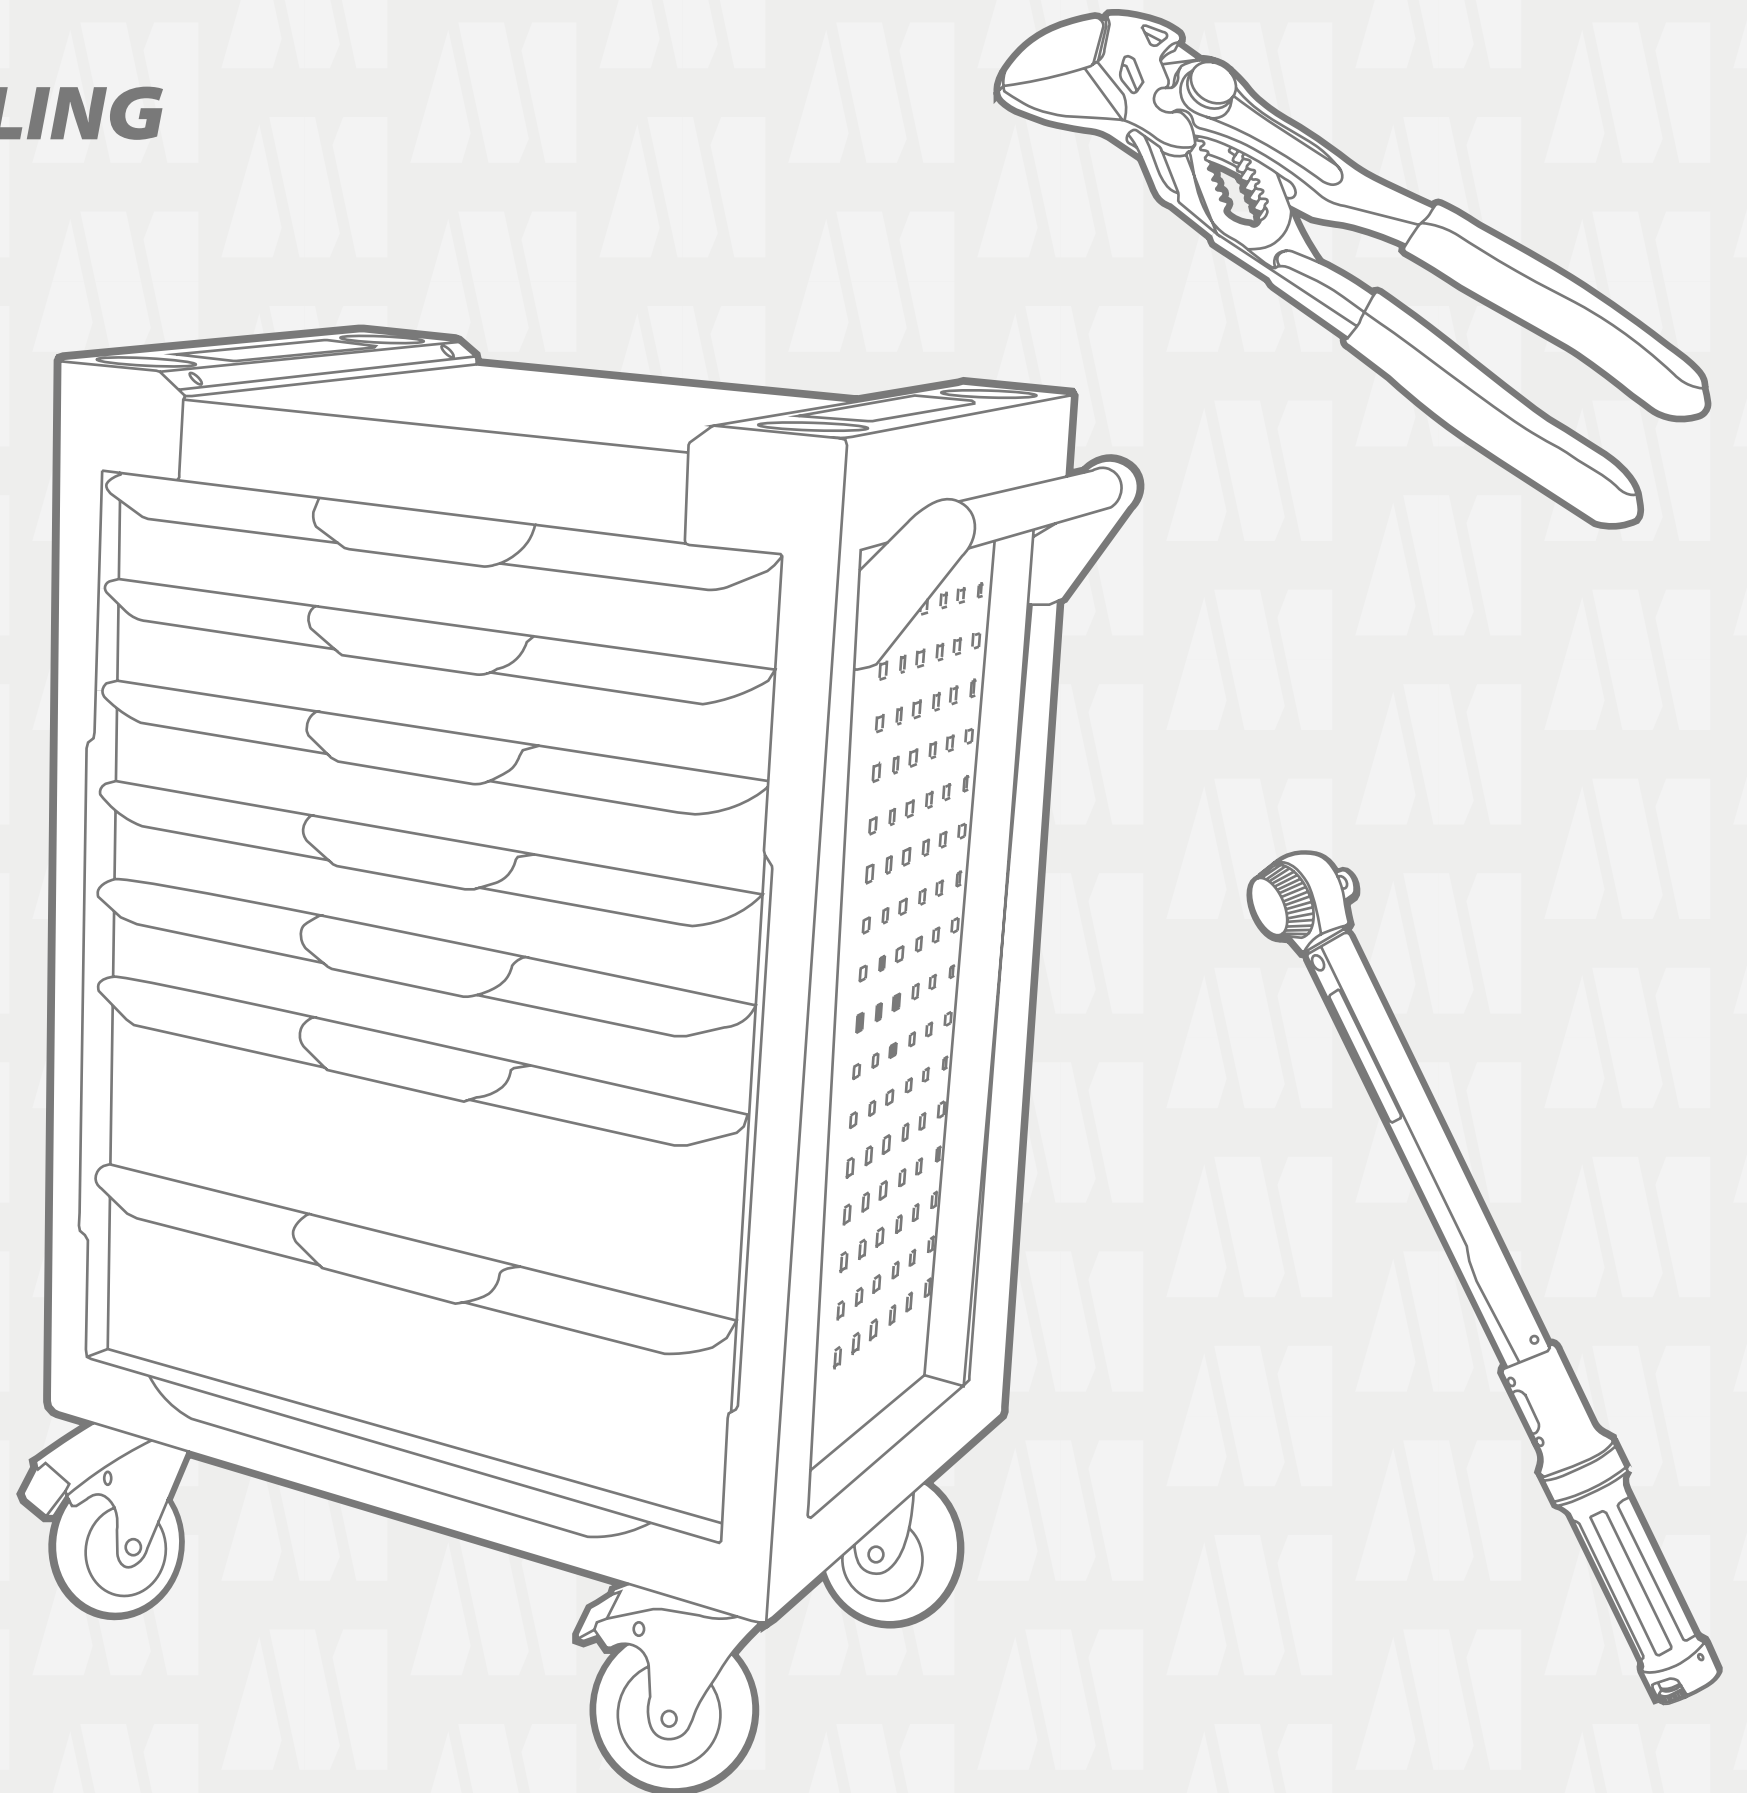




## TOOL TROLLEYS

### MAROLORACE 2 TROLLEY + 112 TOOLS



- 7 drawers trolley
- Full extension anti-tilt drawers
- 2 pivoting wheels, one of which is equipped with a brake
- Aluminum top
- Dimensions : L 948 x D 546 x H 971 mm

Ref. 802674



**Set of 112 tools**  
(no trolley)  
Ref. 802655

## TOOL TROLLEYS

### MAROLOTOOLS TROLLEY + 230 TOOLS




- 7 drawers trolley
- Full extension anti-tilt drawers on roller slides
- Compartmentalized top
- Central locking system
- 2 pivoting wheels equipped with brakes
- Weight : 90 kg
- Dimensions : L 760 x D 465 x H 1010 mm

Ref. 802800



**Trolley only**  
(no tools)  
Ref. 802668



**Set of 230 tools**  
(no trolley)  
Ref. 802692

### DRAWER 1

#### Module 1

- Set of 1/2" hex sockets + accessories
- 17 10 to 32 mm sockets

#### Module 2

- 1 hammer
- 1 sledge hammer
- 1 chisel
- 1 pin
- 3 4.5 and 6 mm pin punches

#### Module 3

- set of 1/4" hex sockets + accessories
- 10 sockets : n° 5,5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14
- 2 PZ n° 1 and 2 bits
- 7 perforated TORX bits : n° 10, 15, 20, 25, 27, 30, 40
- 6 long allen wrenches n° 3, 4, 5, 6, 7, 8

### DRAWER 2

#### Module 1

- 6 flat-end screwdrivers : n° 3x75 n° 3,5x100 n° 4x125 n° 5,5x100 n° 6,5x150 and n° 8x175
- 2 PH screwdrivers: n° 1x100 and n° 2x125

#### Module 2

- Screw and bolt organizer

#### Module 3

- Ball-handle screwdrivers : - 2 flat-ends : n° 4x0,8 and n° 5,5x1
- 1 PH: n° 1x25
- 1 PZ : n° 2x35
- Standard screwdriver: - 1 PH: n° 0x75
- 3 PZ : n° 0x75 n° 1x100 and n° 2x125

### DRAWER 3

#### Module 1

- 1 pair of pliers
- 1 pair of vise-grips

#### Module 2

- 1 pair internal circlips pliers, chain nose
- 1 pair external circlips pliers, chain nose
- 1 pair internal circlips pliers, elbowed nose
- 1 pair external circlips pliers, elbowed nose

#### Module 3

- 1 pair side-cutting pliers
- 1 pair universal pliers
- 1 pair half-round nose pliers

### DRAWER 4

- 10 socket wrenches n° 8, 10, 11, 12, 13, 14, 16, 17, 18, 19
- 17 combination wrenches n° 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24

### DRAWER 1

#### Module 1

- 11/2" ratchet
- 2 extenders
- 1 1/2" cardan joint
- 1 3/8" x 1/2" socket
- 17 hex sockets
- 2 long sockets

#### Module 2

- 5 TORX 1/4" sockets - 4 TORX 3/8" sockets - 3 TORX 1/2" sockets
- 1 1/4" x 1/4" socket - 1 3/8" socket
- 1 1/2" socket - 1 extender - 5 flat-ended bits - 5 PH bits - 6 PZ bits
- 15 hex bits - 32 perforated TORX bits - 9 XZN bits

#### Module 3

- 1 1/4" ratchet - 1 interchangeable bit screwdriver 1/4" - 2 extenders
- 1 flexible extender - 1 sliding handle - 1 1/4" cardan joint - 13 hex sockets - 8 long sockets - 1 1/4" x 1/4" bits - 3 flat-ended bits - 3 PH bits - 2 PZ bits - 6 allen bits
- 7 TORX bits - 4 XZN bits

### DRAWER 2

#### Module 1

- 17 combination wrenches : - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 and 22 mm

#### Module 2

- 1 flat-ended mini screwdriver
- 3 flat-ended screwdrivers
- 1 mini PH2 screwdriver
- 3 PH screwdriver
- 1 mini PZ2 screwdriver
- 3 PZ screwdrivers
- 6 allen wrenches
- 6 TORX wrenches

### DRAWER 3

#### Module 1

- 2 pair internal circlips pliers
- 2 pair external circlips pliers
- 1 pair int. circlips angled pliers
- 1 pair ext. circlips elbowed pliers

#### Module 2

- 1 600g hammer
- 1 polyurethane hammer
- 1 extra-flat chisel
- 6 pin punches

#### Module 3

- 1 pair side-cutting pliers
- 1 pair universal pliers
- 1 pair half-long nosed pliers
- 1 pair combination pliers



## TOOL TROLLEYS

### MAROLORACING TROLLEY + 114 TOOLS



- 7 drawers trolley
- Full extension, anti-tilt drawers on roller slides
- Compartmentalized topper
- Central locking system
- ABS worktop
- 4 heavy-duty wheels, 2 of which are pivoting and equipped with brakes
- Max. capacity per drawer : 30 kg
- Dimensions : L 720 x D 460 x H 975 mm

Ref. 802810



**Trolley only**  
(no tools)  
Ref. 802673

### DRAWER 1

#### Module 1

- 1 1/2", 72 teeth ratchet
- 2 extenders (125 - 250 mm)
- 1 1/2" cardan joint
- 1 3/8" x 1/2" tip
- 17 hex sockets (10 to 22 and 24 - 27 - 30 - 32 mm)
- 2 long sockets (16 and 21 mm)

#### Module 2

- 17 combination wrenches (6 to 22 mm)

#### Module 3

- 1 1/4", 72 teeth ratchet
- 1 interchangeable bit screwdriver 1/4"
- 2 extenders (50 - 100 mm)
- 1 flexible extender (150 mm)
- 1 sliding handle 110 mm
- 1 1/4" cardan joint
- 13 hex sockets (4 to 14 mm)
- 8 long sockets (6 to 13 mm)
- 1 1/4" x 1/4" bit
- 3 flat-ended bits (4 - 5,5 - 8 mm)
- 3 (PH1 - PH2 - PH3) bits
- 2 (PZ1 - PZ2) bits
- 6 allen bits (3 to 8 mm)
- 7 TORX bits (T10 - T15 - T20 - T25 - T30 - T40)
- 4 bits (M4 - M5 - M6 - M8)

### DRAWER 2

#### Module 1

- 4 flat-ended screwdrivers (4 - 5,5 - 6,5 - 8 mm)
- 2 PH screwdrivers (PH1 - PH2)

#### Module 2

- 1 600g hammer
- 1 polyurethane hammer
- 1 extra-flat chisel
- 6 pin punches (3 - 4 - 5 - 6 - 7 - 8 - 10 mm)

#### Module 3

- 1 pair side cutting pliers
- 1 pair universal pliers
- 1 pair half-long nosed pliers
- 1 pair combination pliers

## ADDITIONAL TOOL PACKS

### PLUS PACK - 16 TOOLS

- 5 combination wrenches : 24 - 27 - 29 - 30 - 32 mm
- 11 socket wrenches : 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm

Ref. 802820



### IMPERIAL PACK- 75 TOOLS

- 11 1/4" sockets
- 10 long 1/4" sockets
- 5 allen bits
- 19 1/2" sockets
- 9 long 1/2" sockets
- 6 allen wrenches

- 13 combination wrenches : 1/4" - 5/16" - 11/32" - 3/8" - 7/16" - 1/2" - 9/16" - 5/8" - 11/16" - 3/4" - 13/16" - 7/8" - 15/16"

Ref. 802826



### PRO SET - 17 TOOLS



- Augmenter/decreaser set
- 1 mini flexible magnet
- 4 articulated «T» spark plug wrenches
- Fork seal insertion kit, from 26 to 36 mm & from 36 to 46 mm
- 2 carburetor screwdrivers (flat and Phillips)
- CHAINLaser Chain alignment tool
- Wheel axle spindle key
- Set of 9 shims
- Pneumatic brake bleeder
- Reversible 1/2" torque wrench, from 20 to 100 N.m
- 1 MAROLOLAMP (LED handheld torch)
- Elbowed cardan screwdriver, stainless steel 1/16 rod + 5 bits
- Chain rivet extractor kit

Ref. 802828

### T WRENCHES STORAGE RACK

- Storage rack for T wrenches, with lockable cover
- 5 hex socket tees : 8 - 10 - 12 - 14 - 17
- 4 allen tees : N° 4 - 5 - 6 - 8
- 2 Philipps® Ts : N° 2 - 3

Ref. 802822

Rack only (no wrenches) :  
Ref. 802633



### BLACK BOX - 100 OUTILS

- Case with 3 drawers
- 1/4" and 1/2" tools : ratchets, sockets, extenders, sliding handle, bits (Flat, Phillips®, Pozidrive®, Torx®)
- Set of wrenches, screwdrivers, pliers and hammer

Ref. 802650





## HEX TEES

made in  
Japan

PRODUCT CHARACTERISTICS		
MODEL	REFERENCE	COMPRISED OF
Set of 5 tees	500675	N° 8 - 10 - 12 - 14 - 17
Set of 10 tees	500685	N° 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 19
Tee N° 8	501008	N° 8
Tee N° 9	501009	N° 9
Tee N° 10	501010	N° 10
Tee N° 11	501011	N° 11
Tee N° 12	501012	N° 12
Tee N° 13	501013	N° 13
Tee N° 14	501014	N° 14
Tee N° 15	501015	N° 15
Tee N° 17	501017	N° 17
Tee N° 19	501019	N° 19

## ALLEN TEES

made in  
Japan

PRODUCT SPECIFICATIONS		
MODEL	REFERENCE	COMPRISED OF
Set of 4 tees	500655	N° 4 - 5 - 6 - 8
Tee N° 4	501024	N° 4
Tee N° 5	501025	N° 5
Tee N° 6	501026	N° 6
Tee N° 8	501028	N° 8

## FLAT-ENDED AND PHILLIPS TEES

made in  
Japan


PRODUCT SPECIFICATIONS		
MODEL	REFERENCE	COMPRISED OF
Set of 2 phillips screwdrivers	500665	N° 2 - 3
Tee N° 2	501002	N° 2
Tee N° 3	501003	N° 3
Set of 2 flat-ended screwdrivers	501050	N° 6 - 8
Tee N° 6	501046	N° 6
Tee N° 8	501048	N° 8

## SET OF 8 ELBOWED WRENCHES W/ MULTIPURPOSE HANDLE



PRODUCT SPECIFICATIONS		
MODEL	REFERENCE	COMPRISED OF
Extra long allen wrenches 160 mm	600770	Ø 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10
Allen wrenches	600789	Ø 5/64" - 3/32" - 1/8" - 5/32" - 3/16" - 1/4" - 5/16" - 3/8"
Torx® wrenches	600775	T10 - T15 - T20 - T25 - T30 - T40 - T45 - T50
Perforated Torx® wrenches	600780	T10 - T15 - T20 - T25 - T30 - T40 - T45 - T50

2 stainless steel springs hold the spark plug by its hexagonal part while pushing it against the brass guide socket, to align it perfectly : Makes removing and installing spark plugs easy

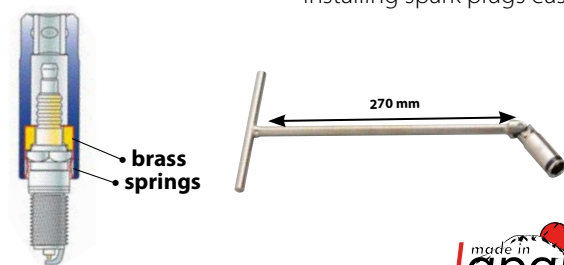made in  
Japan

PRODUCT SPECIFICATIONS		
MODEL	REFERENCE	COMPRISED OF
Set of 4 wrenches	500785	Ø 14 - 16 - 18 - 21
n° 14 wrench	500014	Ø 14
n° 16 wrench	500040	Ø 16
n° 18 wrench	500050	Ø 18
n° 21 wrench	500060	Ø 21

## 3/8" CASE

KSTOOLS case, comprised of :

- 1 72 teeth ratchet
- 2 75 and 150 mm extenders
- 1 160 mm sliding handle
- 1 cardan joint
- 11 sockets : 1/4" - 5/16" - 3/8" - 7/16" - 1/2" - 9/16" - 5/8" - 11/16" - 3/4" - 13/16" - 7/8"
- 6 long sockets : 3/8" - 7/16" - 1/2" - 9/16" - 11/16" - 3/4"
- 2 long spark plug sockets : 5/8" - 13/16"
- 22 screwdriver bits :  
Allen 1/8" - 5/32" - 3/16" - 7/32" - 1/4" - 5/16" - 3/8"  
Torx® n°T10, T15, T20, T25, T27, T30, T40, T45, T50, T55  
XZN® M4, M5, M6, M8, M10

Ref.500498



## SET OF COMBINATION WRENCHES

KSTOOLS foam module comprised of  
5 combination wrenches :  
24 - 27 - 29 - 30 - 32 mm

Ref.802755



## SET OF COMBINATION WRENCHES AND SOCKETS - IMPERIAL

Tool set comprised of :



- Module n°1
- 11 1/4" sockets : 3/16" - 7/32" - 1/4" - 9/32" - 5/16" - 11/32" - 3/8" - 13/32" - 7/16" - 1/2" - 9/16"
  - 10 long 1/4" sockets : 5/32" - 3/16" - 7/32" - 1/4" - 9/32" - 5/16" - 11/32" - 3/15" - 7/16" - 1/2"
  - 5 1/4" hex bits : 1/8" - 5/32" - 3/16" - 7/32" - 1/4"
  - 19 1/2" sockets : 3/8" - 7/16" - 1/2" - 9/16" - 19/32" - 5/8" - 21/32" - 11/16" - 3/4" - 25/32" - 13/16" - 7/8" - 15/16" - 31/32" - 1" - 1,1/16" - 1,1/8" - 1,3/16" - 1,1/4"
  - 9 long 1/2" sockets : 3/8" - 7/16" - 1/2" - 9/16" - 11/16" 3/4" - 7/8" - 15/16" - 1"
  - 8 5/64" allen wrenches - 3/32" - 1/8" - 5/32" - 3/16" - 1/4" - 5/16" - 3/8"

- Module n°2
- 13 combination wrenches : 1/4" - 5/16" - 11/32" - 3/8" - 7/16" - 1/2" - 9/16" - 5/8" - 11/16" - 3/4" - 13/16" - 7/8" - 15/16"

Ref.802826







PREMIUM PLIERS

COBRA MULTIGRIP PLIERS



COBRA XL 400 MULTIGRIP PLIERS



FINE TIP COBRA PLIERS



PRODUCT SPECIFICATIONS

MODEL	REF.	CAPACITY (NUTS, mm)	CAPACITY (TUBES Ø)	NB. OF SETTINGS
COBRA ES 250	601311	34	32 mm ; 1¼"	19
COBRA 125	601313	27	27 mm ; 1"	13
COBRA 150	601315	30	32 mm ; 1¼"	11
COBRA 180	601318	36	42 mm ; 1½"	18
COBRA 250	601325	46	50 mm ; 2"	25
COBRA 300	601327	60	70 mm ; 2¾"	30
COBRA XL 400	601329	95	90 mm ; 3½"	27

UNIVERSAL RING PLIERS

Rotating jaws for a better grip



CLICK RING PLIERS

Rotating jaws for a better grip



ADJUSTABLE WRENCH

3 gripping surfaces  
Ideal for rusty parts



HALF-ROUND NOSE CUTTING PLIERS

Chain nose : Ref. 601303



40° elbowed nose : Ref. 601305



Can be used to crimp the tip on bowden and traction cables



"X-CUT" SIDE-CUTTING PLIERS

Wide opening  
Precise cut  
Double fixation axle

Ref. 601308



UNIVERSAL PLIERS

Suited for thick cables

Ref. 601300



COMPACT BOLT CUTTER

Cuts piano wires, screws, bolts, nails...  
Internal spring

Ref. 601462




PREMIUM PLIERS



PLIER-WRENCHES



Metric and imperial  
Parallel jaws => Doesn't damage nuts  
Precise and non-disruptible setting

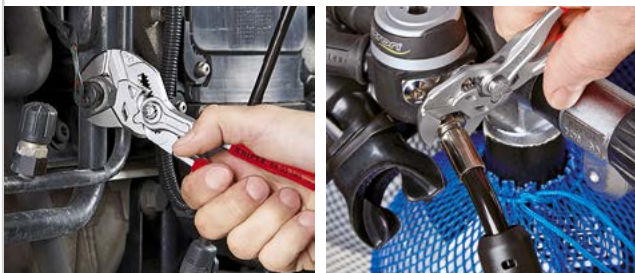

PRODUCT SPECIFICATIONS

MODEL	REFERENCE	CAPACITY (NUTS)	NB. OF SETTINGS
125 PLIER WRENCH	601414	23	11
150 PLIER WRENCH	601415	27	14
180 PLIER WRENCH	601418	35	13
250 PLIER WRENCH	601425	46	17
300 PLIER WRENCH	601427	60	22
400 PLIER WRENCH	601440	85	25

CRIMPING PLIERS FOR OPEN PLUGS

Ref. 601345



AUTOMATIC WIRE STRIPPER

Automatic diameter adjustment

Ref. 601340



PIPE CUTTER


Effortlessly cuts pipes and hoses without crushing or distorting them

Ref. 601460



CIRCLIPS PLIERS

Flat nose without chamfer for a better grip  
Shock-resistant piano wire tips



PRODUCT SPECIFICATIONS

MODEL	REF.	INNER / OUTER	Ø	SHAPE
Outer circlips pliers 140	601451	Outer	10 - 25 mm	Straight with spring
Outer circlips pliers 180	601452	Outer	19 - 60 mm	Straight with spring
Inner circlips pliers 140	601455	Inner	12 - 25 mm	Straight
Inner circlips pliers 180	601456	Inner	19 - 60 mm	Straight



METROLOGY

DIGITAL CALIPER

150 mm track  
0,01 mm accuracy  
Ref.400040



1/2" TO 3/8" REDUCER WITH SLIDER

Square end with ball coupling



Ref.601281

AUGMENTER / REDUCER SET

6 adaptors :  
1/4 F - 3/8 M  
1/2 F - 3/8 M  
3/8 F - 1/4 M  
1/2 F - 3/4 M  
3/8 F - 1/2 M  
3/4 F - 1/2 M

Ref.601220



20 N DYNAMOMETER

Measures steering bearings resiliency  
Fiber glass casing  
Protection against overloads  
Calibration screw  
Max. Capacity : 20 Nm  
Graduation : 10 gr

20 N model :  
Ref. 600368

200 N model :  
(Limited stock available)  
Ref. 600361



PAIR OF 4-NOTCHED TEES

Dimensions : 100 x 100 x 30 mm  
Notches : 20 - 30 - 40 - 50 mm  
Ref.400029



TRY SQUARE

Class 2  
Special hardened steel  
Smooth ground surface finish  
Length : 200 mm

Ref.400039



MAGNETIC DIAL SUPPORT STAND

Strength : 80 kg  
Total vertical height : 235 mm  
Vertical rod : Ø 12 mm  
Orientable rod : Ø 10 mm

Ref.400050



IMPACT WRENCHES AND SOCKETS

CORDLESS IMPACT WRENCH - 1/2"

Torque : 380 N/m  
2000 rpm  
Removable carbon brushes  
Clockwise and anti-clockwise  
Weight : 2.9 kg  
Supplied with 2 18 Volt batteries  
and 1 quick-charge charger (1 hour)

Ref.400013



PNEUMATIC PROFESSIONAL IMPACT WRENCH - 1/2"

Screwing :  
1 = 444 Nm  
2 = 592 Nm  
3 = 810 Nm  
Unscrewing :  
1 = 1490 Nm  
7500 rpm  
Weight : 2.86 kg  
Pneumatic connection : 1/4"

Ref.400012



IMPACT WRENCH SOCKETS - 1/2"

KSTOOLS case, comprised of :  
1 extender  
1 cardan joint  
10 sockets : 10, 11, 13, 14, 17, 19, 21, 22, 23 and 24 mm

Ref. 500725



DOUILLES LONGUES TORX FEMELLES 1/2"

KSTOOLS case, comprised of :  
9 sockets : E10, E11, E12, E14, E16, E18, E20, E22 and E24

Ref.500694



IMPACT WRENCH BITS - 1/2"

KSTOOLS case, comprised of :  
T30, T40, T45, T50, T55, T60, T70 and T80 bits

Ref. 500736



3/4" to 1/2" IMPACT REDUCER

Ref.601223



SET OF ALLEN BITS - 1/2"

KSTOOLS case, comprised of :  
8 bits : Ø 5 - 6 - 8 - 10 - 12 - 14 - 17 - 19

Ref.500735



HEX SOCKET ONLY



PRODUCT SPECIFICATIONS

MODEL	REF.	Ø	SQUARE DRIVE
12	400002	12 mm	1/2"
15	601211	15 mm	
36	601219	36 mm	1/4"
46	601224	46 mm	




ENGINE MAINTENANCE

JET REAMERS

Mandrel + 21 reamers from 0.35 to 1.35 mm  
(in 0.5 mm increments)


Ref.400217

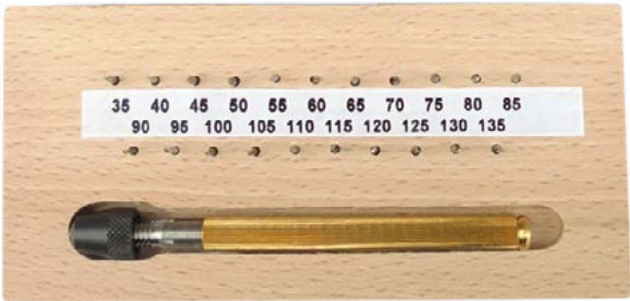

FUEL SYSTEM SCREWDRIVERS

Blade length : 300 mm  
Flat end : 5,5 mm

Ref.400285



Blade length : 300 mm  
Phillips end : n°2

Ref.400286



CAM CHAIN TENSIONER TOOL

For easy resetting of camchain tensioner mechanisms on  
some Yamaha models (Yamaha R-1)

Ref. 500366



ELBOWED SCREWDRIVER WITH UNIVERSAL JOINT - 1/16"

Aluminium handle and stainless steel rod  
Supplied with 5 bits (flat drive, "D" drive, 6 mm hex drive, 1/4" square drive, Phillips® drive)

Ref.500101



ADD-ON

Flat-ended bit, 45 mm length  
Ref.500102



ENGINE MAINTENANCE

PROFESSIONAL VALVE LIFTER

Designed for motorcycles  
Supplied with 4 retainers Ø 16 - 23 - 28 and 30 mm  
(ext. Ø = 33.5 mm)

Ref.500206



TAPPET TOOL SET

Heat-treated and chrome-plated for improved durability  
Interchangeable wrenches and adjusters to suit most bikes and ATVS

Ref.500140



COOLING CIRCUIT TESTER

Adjustable to all cooling systems  
Checks radiator plugs for leaks  
Can also be used to find leaks at cylinder head gaskets,  
radiator/heating elements, hoses or water pumps

Ref.800591



DISTRIBUTION CHAIN OFFSET KIT

For traditional and HY-VO -type chains  
Tips : 2.20 - 2.90 - 3.80 + Riveting tips

Ref.500365



HOSE PLIERS



PRODUCT SPECIFICATIONS

MODEL	REFERENCE	PLIER OPENING
8 - 13	500190	From 8 to 13 mm



SHIM SETS



PRODUCT SPECIFICATIONS

MODEL	REFERENCE	COMPRISED OF
Set of 13 shims	600315	0.05 - 0.1 - 0.15 - 0.2 - 0.25 - 0.3 - 0.4 - 0.5 - 0.6 - 0.7 - 0.8 - 0.9 and 1 mm
Set of 9 shims	600316	0.04 - 0.05 - 0.06 - 0.07 - 0.08 - 0.10 - 0.15 - 0.20 and 0.30 mm



## WINDERS AND INFLATION GUNS

## EURODAINU INFLATION GUN

From 0 to 11 Bar  
0,1 Bar scale  
Ref. 600560



## SPIRAL HOSE (8 m)

Ref. 400172



## AUTOMATIC ELECTRIC CABLE WINDER

Automatic winding  
Holds 9 meters of cable  
Section : 3 x 2,5 mm<sup>2</sup>  
Power : 2500 W  
ABS case  
Adjustable wall-mount

Ref. 400220



## AIR AND WATER HOSE WINDER

Automatic winding  
Holds a 10 m hose  
Max. pressure : 15 Bar  
ABS case  
Adjustable wall-mount

Ref. 400140



 When equipped with electrical appliances, the whole set of furniture should be grounded

## TRICOCLAIR HOSES

6/12 diameter

Ref. TRI.06

08/14 diameter

Ref. TRI.08



## INFORMATION

REF.	INTERNAL Ø	EXTERNAL Ø
TRI.06	6 mm	12 mm
TRI.08	8 mm	14 mm



## GENERAL INFORMATION



Electrical appliances should be connected to a network equipped with a 30 mA differential circuit breaker (or according to legislation in your area) and should be grounded.



To protect your network and your pneumatic tooling, your compressed air network should be equipped with a regulating and lubricating filter as well as bleeders.

## TYRE MAINTENANCE

## VALVE EXTRACTION LEVER

Steel body with plastic protection  
Ref. 600500



## SPHERICAL GRINDING WHEEL



Ref. 600040





## ASSORTMENT OF WEIGHTS AND VALVES

Case comprised of :  
25 silver weights bar (50 g per bar)  
50 black weights bar (50 g per bar)  
1 pair of side-cutting pliers  
30 straight valves  
10 elbowed scooter valves

Ref. 400415



## WEIGHT BARS (25 pcs) - 50 grams each



Silver :  
Ref. 400340  
Black :  
Ref. 400380

## TYRE PASTE



1 kg tub:  
Ref. 600380  
3 kg tub :  
Ref. 600387

## SPOKE WEIGHTS HAMMER

Ref. 400420



## TUBELESS TYRE INFLATION GUN



To easily and quickly inflate tubeless tyres  
Suited for 2-wheeler, ATV, mower wheels  
Supplied with eye and auditory protection

Ref. 801108




## PRODUCT SPECIFICATIONS

VOLUME	PRESSURE	WEIGHT
6 L	≈ 6 Bar	5,5 kg

WHEEL MAINTENANCE

WORKBENCH VICE FOR FORKS, SHOCK ABSORBERS...

To set up on the workbench  
Can be separated from its base to free up space around the work surface  
2 main components : base secured to the workbench, removable arm  
Covered jaws  
Quick tightening  
360° rotation of the clamp

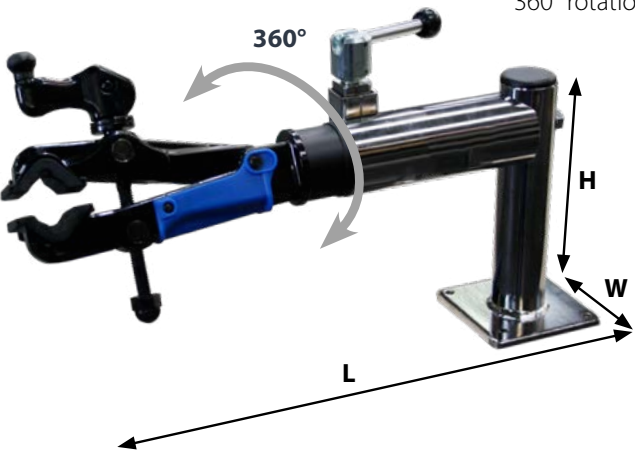

Ref. 500783



CHARACTERISTICS			
H	L	W	WEIGHT
260 mm	460 mm	220 mm	6 kg

ADD-ON

Replacement jaw covers

Ref. 500781

FORK COMPRESSOR

**MADE IN FRANCE**

Ref. 500243



150 MM STEEL VICE

Hardened steel vice with rotating base  
Interchangeable steel jaws

Ref. 500761



MAGNETIC ALUMINIUM JAWS

Length : 125 mm


Ref. 500759



WHEEL MAINTENANCE

FORK SEAL INSERTION KIT

For traditional and inverted forks  
2 Ø26 to 36 mm rings + slide hammer  
Ref. 500245

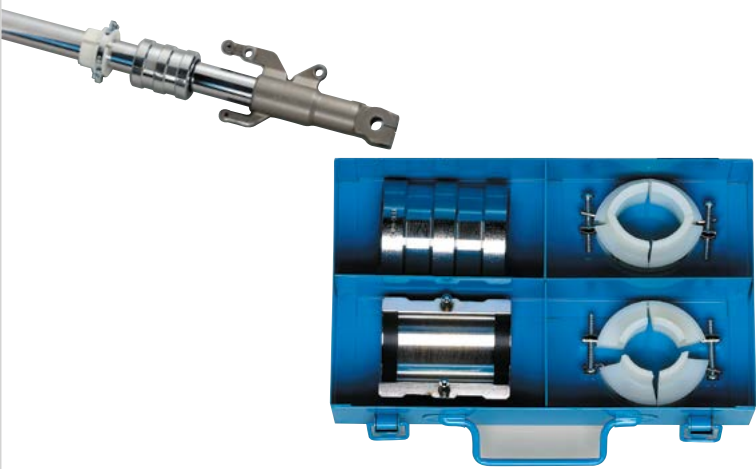

FORK SEAL INSERTION RING Ø48 mm

For Ø48 mm fork legs

Ref. 601050



WHEEL AXLE SOCKETS

Hexagonal aluminium socket  
4 dimensions : 17 - 19 - 22 and 24 mm  
Ref. 601090



Hexagonal 3/4" shock socket

Ø22 mm : Ref. 601216  
Ø24 mm : Ref. 601217



3/4" 12-sided socket - Ø55 mm

Ref. 601218



IMPACT TYPE CHAIN BREAKER

Square pin heads  
Breaks chains from 500 to 600  
Ref. 500594



PNEUMATIC BRAKE BLEEDER

Depressurization system with back flow preventer  
To bleed brake and clutch circuits  
Double-ended kit

Ref. 800508





BLEEDING AND BEARING EXTRACTION

UNIVERSAL OIL FILTER WRENCH

Ø62 to 120 mm  
To tighten and loosen oil filters  
Self-adjusting

Ref. 500465



4,5 mm  
CLEARANCE

VACUUM PRESSURE PUMP CASE

Hydraulic circuit bleeding/refilling pump  
Aluminium body  
Rotating manometer

Ref. 800510



BEARING PULLERS AND EXTRACTORS KIT

Set of 2 extractors with 3 outer/inner pullers  
Puller from 0 to 50 mm

Ref. 500738



BEARING SEPARATORS



CLEARANCE

INNER BEARING PULLER SLIDE HAMMER



PRODUCT SPECIFICATION

MODEL	REFERENCE	SOCKET
Puller alone	600435	not included
8 - 12	600445	8 to 12 mm
12 - 14	600455	12 to 14 mm
14 - 19	600465	14 to 19 mm
19 - 24	600475	19 to 24 mm
24 - 30	600485	24 to 30 mm

THREAD INSERTS AND COUPLERS

TAP AND DIE SETS

METRIC SET :

Comprised of 75 pcs :

M2 x 0,4	M6 x 1	M12 x 1,5
M2,6 x 0,45	M6 x 0,75	M12 x 1,75
M3 x 0,5	M7 x 1	M14 x 2
M3 x 0,6	M8 x 1,25	M14 x 1,5
M3,5 x 0,6	M8 x 1	M14 x 1,25
M4 x 0,7	M9 x 1,25	M16 x 1,5
M4 x 0,75	M10 x 1	M18 x 2,5
M4,5 x 0,75	M10 x 1,25	M18 x 1,5
M5 x 0,8	M10 x 1,5	
M5 x 0,9	M12 x 1,25	

Ref. 601130



GAS TAP AND DIE SET :

Comprised of 34 pcs :

1/4" - 20	1/2" - 12
1/4" - 28	1/2" - 20
5/16" - 18	9/16" - 12
5/16" - 24	9/16" - 18
3/8" - 16	5/8" - 11
3/8" - 24	5/8" - 18
7/16" - 14	3/4" - 10
7/16" - 20	3/4" - 16

Ref. 601135



SPARK PLUG HELICAL THREAD INSERTS

M 10 SET

Comprised of :  
1 specialized tap  
1 placement tool  
1 set of 10 mm helical thread inserts

Ref. 400156



Pouch of 10 helical thread inserts M10 x 100 x 10  
Ref. 400141

M 12 SET

Comprised of :  
1 specialized tap  
1 placement tool  
1 set of 10,5 and 18 mm helical thread inserts

Ref. 400157



Pouch of 10 helical thread inserts M12 x 125 x 10,5  
Ref. 400142

Pouch of 10 helical thread inserts M12 x 125 x 18  
Ref. 400143

M 14 SET

Comprised of :  
1 specialized tap  
1 placement tool  
1 set of 7,5 - 10,5 - 18 mm helical thread inserts

Ref. 400158



Pouch of 10 helical thread inserts M14 x 125 x 7,5  
Ref. 400144

Pouch of 10 helical thread inserts M14 x 125 x 10,5  
Ref. 400145

Pouch of 10 helical thread inserts M14 x 125 x 18  
Ref. 400146

INSERTS AND COUPLERS

D.6 GROOVED QUICK COUPLER

Ref. 400105



1/4 THREADING COUPLER

Ref. 400160



1/4 GROOVED CONNECTION

Ref. 400465



D.6 GROOVED INSERT

Ref. 400135




1/4 THREADING INSERT

Ref. 400115



1/4 TAPPING INSERT

Ref. 400125

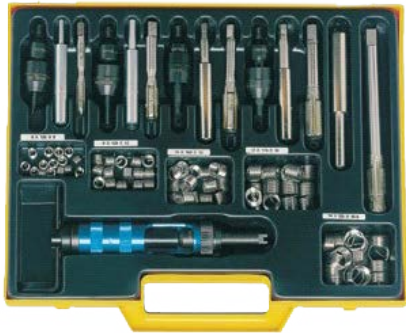

Supplied with inserts of every diameter  
M6 x 100 x 9 - M8 x 125 x 12  
M10 x 125 x 15 - M12 x 125 x 18  
M14 x 125 x 14  
Ref. 400155

## MISCELLANEOUS TOOLING

## MAROLOLAMP

LED lights on top and on the side  
Up to 5 hours battery life  
Magnetic base  
Fully charged in about 3 hours  
Supplied with charger

Ref.500548



## MINI FLEXIBLE MAGNET

400 mm long  
Lifts up to 0.2 kg  
4 mm diameter  
Ref.600265



## 2.6m AUTOMATIC STRAP

Sold by the unit  
Can be secured directly onto the lift or trailer

Length : 2.6 m  
Capacity : 500 daN

Ref.800860



## ST. STEEL BRACKET FOR AUTOMATIC STRAP

Sold by the unit  
Strongly recommended for lifts  
in the «flat-lift» range

Ref.804424



## STEEL HAND-SAW BLADES

Set of 10 blades

Ref.600839



## SET OF 4 PAIRS OF CIRCLIPS PLIERS

Straight outer  
Straight inner  
Elbowed outer  
Elbowed inner  
Length : 160 mm

Ref.600733



## SET OF 5 STRIKING TOOLS

1 n°4 pin punch  
1 n°5 cross-cut chisel  
1 n°12 chisel  
1 nail punch n°3  
1 n°4 needle

Ref.600827



## IMPACT SCREWDRIVER SET


6 flat bits : n° 5, 6, 8, 10, 12 and 14  
3 Phillips® bits : n°1, 2 and 3

Ref.500552



MAROLOBIO


## BIO CLEANING TANKS

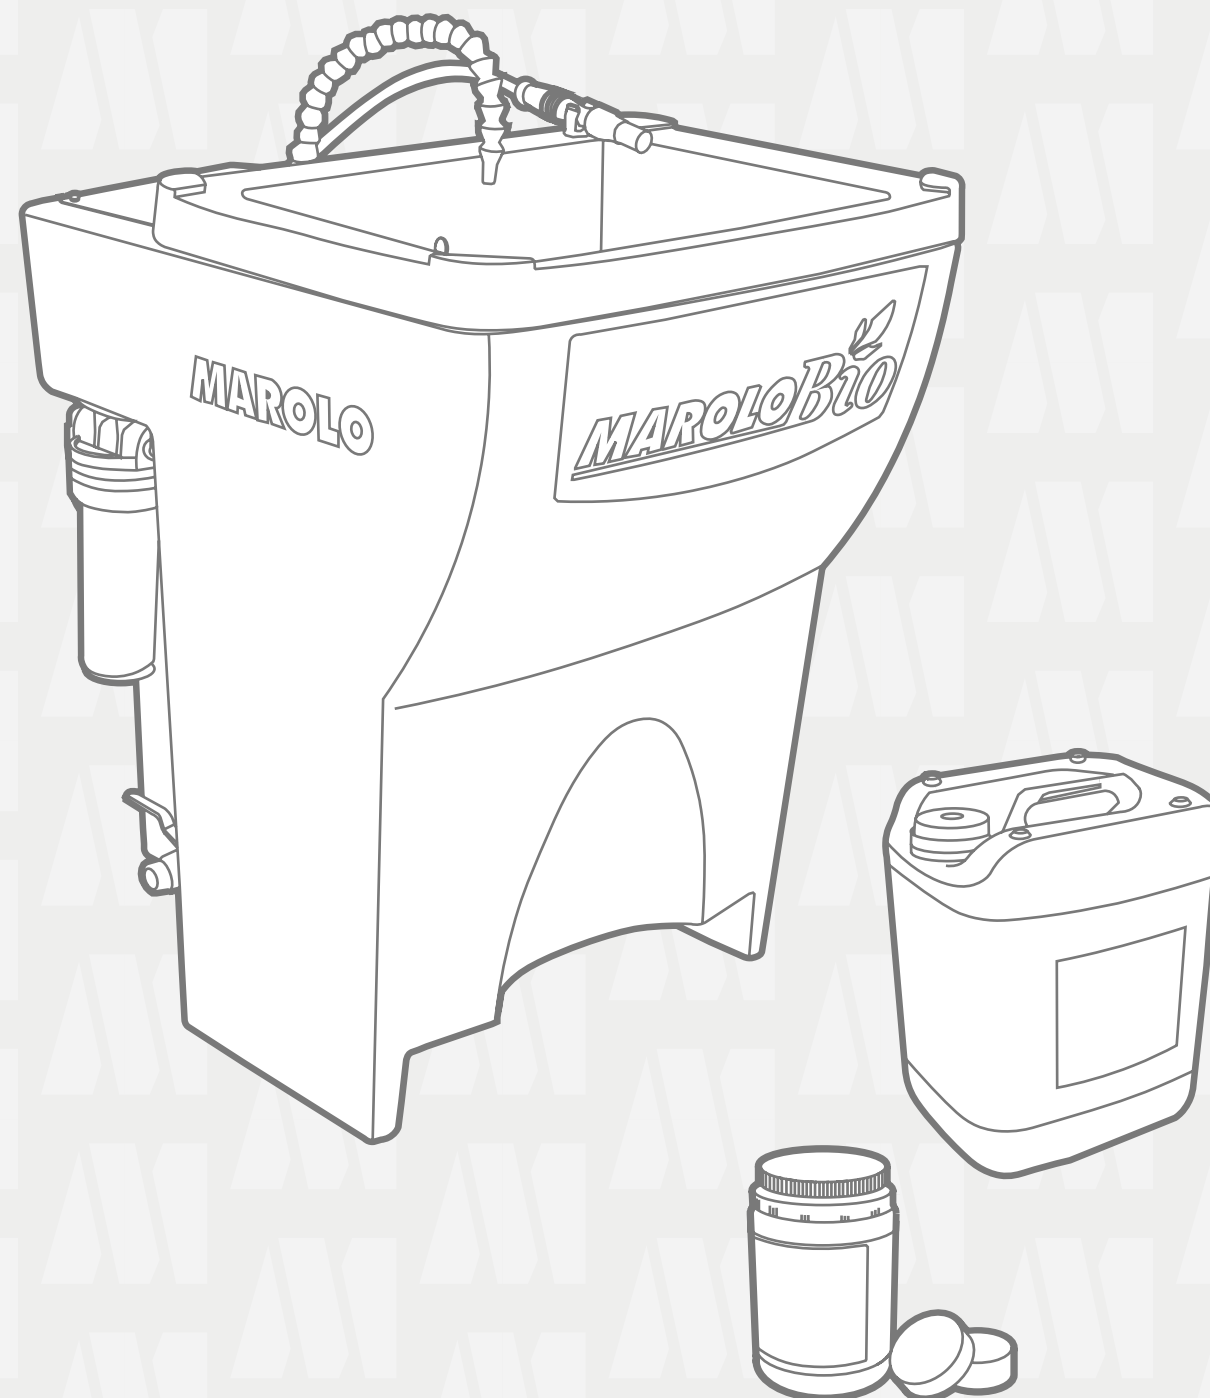



MAROLOBIO CLEANING TANKS

80L MODEL

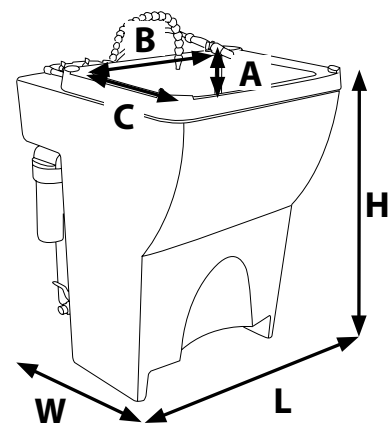

1<sup>ST</sup> FILL FREE

PRODUCT SPECIFICATIONS											
MODEL	REF.	CAPACITY	TANK DIMENSIONS			SINK DIMENSIONS			SINK CAPACITY	POWER SUPPLY	WEIGHT
			H	L	W	A	B	C			
MAROLOBIO 80	801254	80 L	970 mm	750 mm	770 mm	200 mm	600 mm	420 mm	125 kg	230V-50Hz-	17 kg
MAROLOBIO 100	801255	100 L	1080 mm	940 mm	880 mm	200 mm	750 mm	450 mm	150 kg	1KW-1A	21 kg

MAROLOCLEAN

Biodegradable degreaser, odourless and non-flammable  
Sold per 20 L tank  
Ready to use

Ref.400112



MAROLOPILL

Compressed microorganism tablets, capable of regenerating the MAROLOCLEAN cleansing solution  
Sold per box of 4 tablets

Ref.400113



Designed for heavy-duty use

Cleans hydrocarbons (grease, oil, resin) off of mechanical parts (Engine parts, forks, chains)

Long-lasting, self-regenerating cleansing solution (≈12 to 24 month)

Does not use solvents

Supplied with the first fill of consumables :


80L model : includes 80L of MAROLOCLEAN and 1 box of 4 tablets

100L model : includes 100L of MAROLOCLEAN and 1 box of 4 tablets

100L MODEL



BEFORE CLEANSING



AFTER CLEANSING



FULL REFILL

5 20L tanks of MAROLOCLEAN  
1 box of 4 MAROLOPILL tablets

Ref.400117



QUICK REFILL

2 20 L tanks of MAROLOCLEAN  
1 box of 4 MAROLOPILL tablets

Ref.400119



# WE'VE SHIPPED WORLDWIDE



## REACH OUT TO US

### CUSTOMER SERVICE



Florian BEAU  
Tel. : +33 (0)2 41 29 29 29  
Email : service@marolotest.com

### SALES



Ophélie BOUCHET  
Tel. : +33 (0)2 41 29 29 29  
Email : contact@marolotest.com

## MAROLOTEST

Parc d'activités du Cormier - B.P. 20753  
49307 CHOLET cedex - FRANCE  
Tel : +33 (0)2 41 29 29 29  
Fax : +33 (0)2 41 29 29 30  
Email : contact@marolotest.com

[WWW.MAROLOTEST.COM](http://WWW.MAROLOTEST.COM)

## MEET A REPRESENTATIVE



#### COMERCIAL

Alexandre PONSICH  
☎ +34 (0) 660 605 106  
✉ aponsich@marolotest.com



#### COMMERCIAL

René RUTTE  
☎ + 32 (0) 477 605 406  
✉ rr@mail.be



#### TECHN. BERATUNG & VERKAUF

Manfred MÜLLER  
☎ +49 (0) 173 4817732  
✉ mmueller@marolotest.com



#### JMP EQUIPAMENTOS

Jorge PEIREIRA  
☎ + 351 232 961 841  
✉ jmpequipamentos@net.sapo.pt




#### COMMERCIAL

Eric PEHLIVANIAN  
☎ +33 (0)6 10 20 59 87  
✉ epehlivanian@marolotest.com



**HOCO PARTS B.V.**  
Harselaarseweg 104  
3771 MB Barneveld  
The Netherlands

www.hocoparts.com  
☎ +31 (0)342 412290  
✉ sales@hocoparts.com



**NON-STOP TRADING AS**  
Nordasveien 5  
NO-1251 OSLO  
Norway

www.non-stop.no  
☎ 004722083500



**EURO RACING S.R.L.**  
Via Romagna, 20  
61011 Gabicce Mare (PU)  
Italy

www.euro-racing.it  
☎ +39 0541 830695



**EXTRA PRODUCTS**  
55 Kallirrois Street  
117 43 ATHENS  
Greece

www.extraproducts.gr  
☎ +30-210-9213286/7



**RS WORKSHOP EQUIPMENT**  
Unit 28 Barnwell Manor Industrial Estate  
Barnwell, Peterborough PE8 5PL  
The United Kingdom

www.rsworkshopequipment.com  
☎ 01832 741007  
✉ sales@rsworkshopequipment.co.uk





**WWW.MARLOTEST.COM**

MARLOTEST reserves the right to amend this document without prior notice.  
Non-contractual pictures. Clearances deals applicable within the limit of available stock. See our sales conditions on our website.  
Design by MARLOTEST MB - 12/2020